



## U74AUC1G08

CMOS IC

### SINGLE 2-INPUT AND GATE


#### DESCRIPTION

The **U74AUC1G08** is a 2-input AND gate which provides the function  $Y = A \cdot B$  or  $Y = \overline{A + B}$  in positive logic.


This device has power-down protective circuit, preventing device destruction when it is powered down.

#### FEATURES

- \* Operate from 0.8V to 2.7V
- \* Low power dissipation :  $I_{CC} = 10\mu A$  (Max.)
- \*  $\pm 8mA$  Output Driver :  $V_{CC} = 1.8V$
- \*  $I_{off}$  Supports partial-Power-Down Mode Operation



SOT-23-5  
(JEDEC TO-236)



SOT-353

#### ORDERING INFORMATION


| Ordering Number   | Package  | Packing   |
|-------------------|----------|-----------|
| U74AUC1G08G-AE5-R | SOT-23-5 | Tape Reel |
| U74AUC1G08G-AL5-R | SOT-353  | Tape Reel |

U74AUC1G08G-AE5-R


- (1) Packing Type
- (2) Package Type
- (3) Green Package

- (1) R: Tape Reel
- (2) AE5: SOT-23-5, AL5: SOT-353
- (3) G: Halogen Free and Lead Free

#### MARKING





## ■ PIN CONFIGURATION



## ■ FUNCTION TABLE (each gate)

| INPUT |   | OUTPUT |
|-------|---|--------|
| A     | B | Y      |
| L     | L | L      |
| L     | H | L      |
| H     | L | L      |
| H     | H | H      |

## ■ LOGIC DIAGRAM (positive logic)

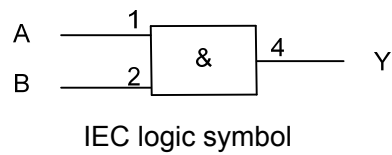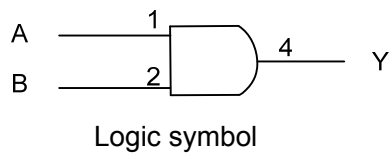

## ABSOLUTE MAXIMUM RATING

| PARAMETER                 | SYMBOL    | TEST CONDITIONS                 | RATINGS               | UNIT |
|---------------------------|-----------|---------------------------------|-----------------------|------|
| Supply Voltage            | $V_{CC}$  |                                 | -0.5 ~ +3.6           | V    |
| Input Voltage             | $V_{IN}$  |                                 | -0.5 ~ +3.6           | V    |
| Output Voltage            | $V_{OUT}$ | Output in the high or low state | -0.5 ~ $V_{CC} + 0.5$ | V    |
|                           |           | Output in the power-off state   | -0.5 ~ +3.6           | V    |
| $V_{CC}$ or GND Current   | $I_{CC}$  |                                 | ±100                  | mA   |
| Continuous Output Current | $I_{OUT}$ | $V_{OUT}=0 \sim V_{CC}$         | ±20                   | mA   |
| Input Clamp Current       | $I_{IK}$  | $V_{IN} < 0$                    | -50                   | mA   |
| Output Clamp Current      | $I_{OK}$  | $V_O > V_{CC}$ or $V_{OUT} < 0$ | -50                   | mA   |
| Storage Temperature Range | $T_{STG}$ |                                 | -65 ~ +150            | °C   |

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.  
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

## ■ RECOMMENDED OPERATING CONDITIONS

| PARAMETER                          | SYMBOL              | TEST CONDITIONS          | MIN | TYP | MAX      | UNIT |
|------------------------------------|---------------------|--------------------------|-----|-----|----------|------|
| Supply Voltage                     | $V_{CC}$            | Operating                | 0.8 |     | 2.7      | V    |
| Input Voltage                      | $V_{IN}$            |                          | 0   |     | 3.6      | V    |
| Output Voltage                     | $V_{OUT}$           | High or low state        | 0   |     | $V_{CC}$ | V    |
| Operating Temperature              | $T_A$               |                          | -40 |     | 85       | °C   |
| Input Transition Rise or Fall Rate | $\Delta t/\Delta v$ | $V_{CC}=0.8V \sim 1.95V$ |     |     | 20       | ns/V |
|                                    |                     | $V_{CC}=2.3V \sim 2.7V$  |     |     | 10       | ns/V |

■ STATIC CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ , unless otherwise specified)

| PARAMETER                 | SYMBOL        | TEST CONDITIONS                                                  | MIN                  | TYP  | MAX                  | UNIT |
|---------------------------|---------------|------------------------------------------------------------------|----------------------|------|----------------------|------|
| High-level Input Voltage  | $V_{IH}$      | $V_{CC}=0.8V$                                                    | $V_{CC}$             |      |                      | V    |
|                           |               | $V_{CC}=1.1V \sim 1.95V$                                         | $0.65 \times V_{CC}$ |      |                      | V    |
|                           |               | $V_{CC}=2.3V \sim 2.7V$                                          | 1.7                  |      |                      | V    |
| Low-level Input Voltage   | $V_{IL}$      | $V_{CC}=0.8V$                                                    |                      |      | 0                    | V    |
|                           |               | $V_{CC}=1.1V \sim 1.95V$                                         |                      |      | $0.35 \times V_{CC}$ | V    |
|                           |               | $V_{CC}=2.3V \sim 2.7V$                                          |                      |      | 0.7                  | V    |
| High-Level Output voltage | $V_{OH}$      | $V_{CC}=0.8 \sim 2.7V$ , $I_{OH}=-100\mu A$                      | $V_{CC}-0.1$         |      |                      | V    |
|                           |               | $V_{CC}=0.8V$ , $I_{OH}=-700\mu A$                               |                      | 0.55 |                      | V    |
|                           |               | $V_{CC}=1.1V$ , $I_{OH}=-3mA$                                    | 0.8                  |      |                      | V    |
|                           |               | $V_{CC}=1.4V$ , $I_{OH}=-5mA$                                    | 1                    |      |                      | V    |
|                           |               | $V_{CC}=1.65V$ , $I_{OH}=-8mA$                                   | 1.2                  |      |                      | V    |
|                           |               | $V_{CC}=2.3V$ , $I_{OH}=-9mA$                                    | 1.8                  |      |                      | V    |
| Low-Level Output voltage  | $V_{OL}$      | $V_{CC}=0.8 \sim 2.7V$ , $I_{OL}=100\mu A$                       |                      |      | 0.2                  | V    |
|                           |               | $V_{CC}=0.8V$ , $I_{OL}=700\mu A$                                |                      | 0.25 |                      | V    |
|                           |               | $V_{CC}=1.1V$ , $I_{OL}=3mA$                                     |                      |      | 0.3                  | V    |
|                           |               | $V_{CC}=1.4V$ , $I_{OL}=5mA$                                     |                      |      | 0.4                  | V    |
|                           |               | $V_{CC}=1.65V$ , $I_{OL}=8mA$                                    |                      |      | 0.45                 | V    |
|                           |               | $V_{CC}=2.3V$ , $I_{OL}=9mA$                                     |                      |      | 0.6                  | V    |
| Input Leakage Current     | $I_{I(LEAK)}$ | $V_{CC}=0 \sim 2.7V$ , $V_{IN}=V_{CC}$ or GND                    |                      | ±0.1 | ±5                   | μA   |
| Power OFF Leakage Current | $I_{off}$     | $V_{CC}=0V$ , $V_{IN}$ or $V_{OUT}=2.7V$                         |                      | ±0.1 | ±10                  | μA   |
| Quiescent Supply Current  | $I_{CC}$      | $V_{CC}=0.8V$ to $2.7V$ ,<br>$V_{IN}=V_{CC}$ or GND, $I_{OUT}=0$ |                      | 0.1  | 10                   | μA   |
| Input Capacitance         | $C_I$         | $V_{CC}=2.5V$ , $V_{IN}=V_{CC}$ or GND                           |                      | 3    |                      | pF   |


■ DYNAMIC CHARACTERISTICS ( $T_A = 25^\circ\text{C}$  , unless otherwise specified)

| PARAMETER                                           | SYMBOL              | TEST CONDITIONS                                  | MIN                             | TYP | MAX | UNIT |
|-----------------------------------------------------|---------------------|--------------------------------------------------|---------------------------------|-----|-----|------|
| Propagation delay from inputs (A or B) to output(Y) | $t_{PLH} / t_{PHL}$ | $C_L = 15\text{pF}$ ,<br>$R_L = 2\text{K}\Omega$ | $V_{CC} = 0.8\text{V}$          | 4.7 |     | ns   |
|                                                     |                     |                                                  | $V_{CC} = 1.2 \pm 0.1\text{V}$  | 0.9 |     | ns   |
|                                                     |                     |                                                  | $V_{CC} = 1.5 \pm 0.1\text{V}$  | 0.6 |     | ns   |
|                                                     |                     |                                                  | $V_{CC} = 1.8 \pm 0.15\text{V}$ | 0.4 | 1.1 | ns   |
|                                                     |                     |                                                  | $V_{CC} = 2.5 \pm 0.2\text{V}$  | 0.2 |     | ns   |
|                                                     |                     | $C_L = 30\text{pF}$ ,<br>$R_L = 1\text{K}\Omega$ | $V_{CC} = 1.8 \pm 0.15\text{V}$ | 0.7 | 1.4 | ns   |
|                                                     |                     | $C_L = 30\text{pF}$ ,<br>$R_L = 500\Omega$       | $V_{CC} = 2.5 \pm 0.2\text{V}$  | 0.5 |     | ns   |


■ OPERATING CHARACTERISTICS ( $f = 10\text{MHz}$ ,  $T_A = 25^\circ\text{C}$  , unless otherwise specified)

| PARAMETER                     | SYMBOL   | TEST CONDITIONS        | MIN | TYP | MAX | UNIT |
|-------------------------------|----------|------------------------|-----|-----|-----|------|
| Power Dissipation Capacitance | $C_{PD}$ | $V_{CC} = 0.8\text{V}$ |     | 15  |     | pF   |
|                               |          | $V_{CC} = 1.2\text{V}$ |     | 15  |     | pF   |
|                               |          | $V_{CC} = 1.5\text{V}$ |     | 15  |     | pF   |
|                               |          | $V_{CC} = 1.8\text{V}$ |     | 15  |     | pF   |
|                               |          | $V_{CC} = 2.5\text{V}$ |     | 19  |     | pF   |

## ■ TEST CIRCUIT AND WAVEFORMS



| $V_{CC}$         | $C_L$ | $R_L$        | $V_M$      |
|------------------|-------|--------------|------------|
| 0.8V             | 15pF  | 2k $\Omega$  | $V_{CC}/2$ |
| 1.2V $\pm$ 0.1V  | 15pF  | 2k $\Omega$  | $V_{CC}/2$ |
| 1.5V $\pm$ 0.1V  | 15pF  | 2k $\Omega$  | $V_{CC}/2$ |
| 1.8V $\pm$ 0.15V | 15pF  | 2k $\Omega$  | $V_{CC}/2$ |
| 2.5V $\pm$ 0.2V  | 15pF  | 2k $\Omega$  | $V_{CC}/2$ |
| 1.8V $\pm$ 0.15V | 30pF  | 1k $\Omega$  | $V_{CC}/2$ |
| 2.5V $\pm$ 0.2V  | 30pF  | 500 $\Omega$ | $V_{CC}/2$ |

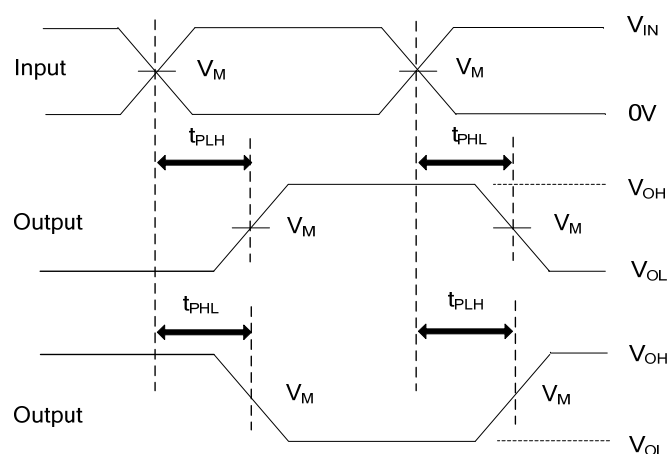

**PROPAGATION DELAY TIMES**

Notes: 1.  $C_L$  includes probe and jig capacitance.

2. All input pulses are supplied by generators having the following characteristics: PRR  $\leq$  10MHz,  $Z_O = 50\Omega$ .

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.