



MBR30H150CT, MBRF30H150CT & MBRB30H150CT-1 Series

New Product


Vishay Semiconductors
formerly General Semiconductor

Dual High-Voltage Schottky Rectifiers


Reverse Voltage 150V

Forward Current 30A


Max. Junction Temperature 175°C

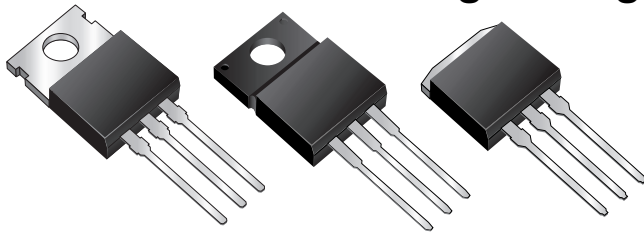


TO-220AB (MBR30H150CT)

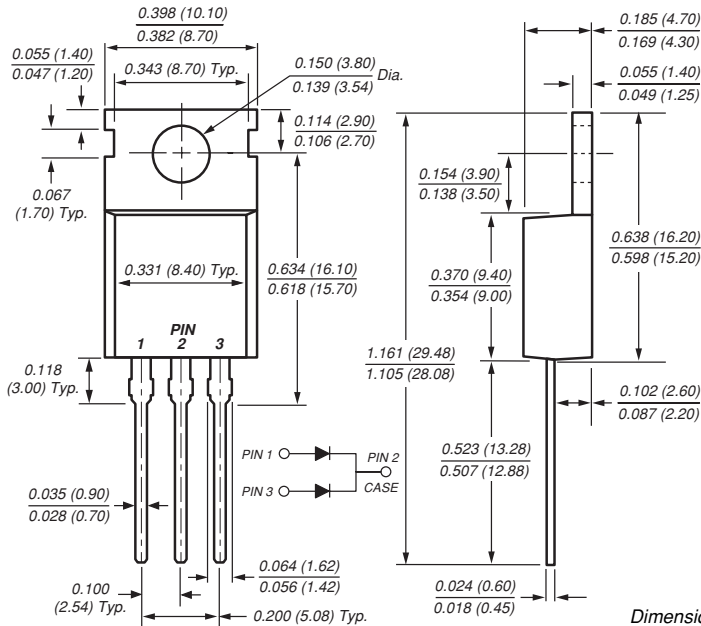

ITO-220AB (MBRF30H150CT)

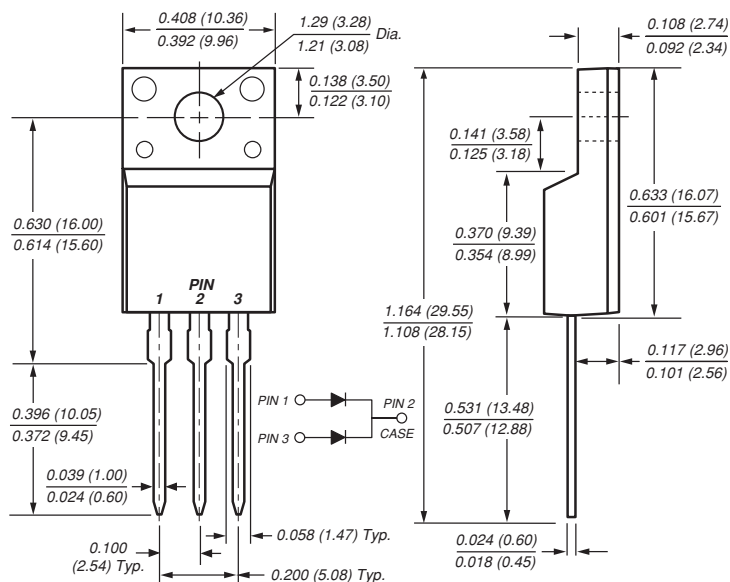

TO-262AA (MBRB30H150CT-1)

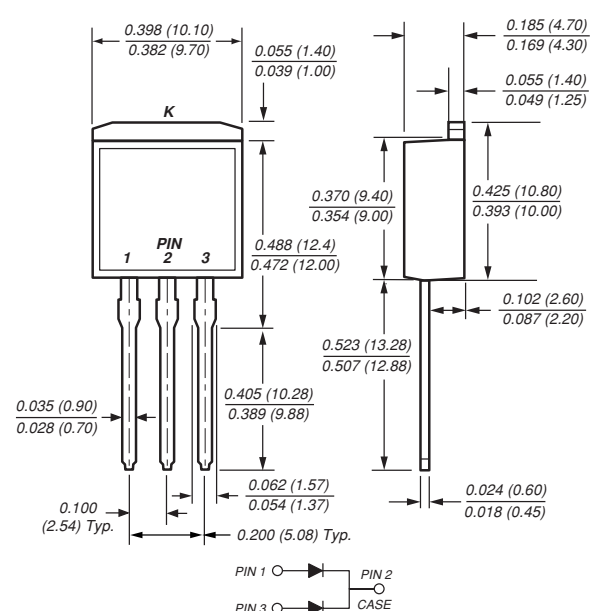

MBR30H150CT, MBRF30H150CT & MBRB30H150CT-1 Series



Vishay Semiconductors
formerly General Semiconductor

Maximum Ratings (T_C = 25°C unless otherwise noted)

Parameter	Symbol	MBR30H150CT	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	150	V
Working peak reverse voltage	V _{RWM}	150	V
Maximum DC blocking voltage	V _{DC}	150	V
Maximum average forward rectified current <i>Total device Per leg</i>	I _{F(AV)}	30 15	A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) per leg	I _{FSM}	260	A
Peak repetitive reverse current per leg at t _p = 2μs, 1KHz	I _{RRM}	1.0	A
Peak non-repetitive reverse surge energy per leg (8/20μs waveform)	E _{RSM}	10	mJ
Non-repetitive avalanche energy per leg at 25°C, I _{AS} = 2.0A, L=10mH	E _{AS}	20	mJ
Voltage rate of change (rated V _R)	dv/dt	10,000	V/μs
Operating junction and storage temperature range	T _J , T _{STG}	-65 to +175	°C
RMS Isolation voltage (MBRF type only) from terminals to heatsink with t = 1 second, RH ≤ 30%	V _{ISOL}	4500 ⁽¹⁾ 3500 ⁽²⁾ 1500 ⁽³⁾	V

Electrical Characteristics (T_C = 25°C unless otherwise noted)

Parameter	Symbol	Value	Unit
Maximum instantaneous forward voltage per leg at ⁽⁴⁾ : I _F = 15A, T _C = 25°C I _F = 15A, T _C = 125°C I _F = 30A, T _C = 25°C I _F = 30A, T _C = 125°C	V _F	0.90 0.75 0.99 0.86	V
Maximum reverse current per leg at working peak reverse voltage T _J = 25°C T _J = 125°C	I _R	5.0 1.0	μA mA

Thermal Characteristics (T_C = 25°C unless otherwise noted)

Parameter	Symbol	MBR	MBRF	MBRB	Unit
Typical thermal resistance per leg	R _{θJC}	1.7	4.0	1.7	°C/W


Notes:

- (1) Clip mounting (on case), where lead does not overlap heatsink with 0.110" offset
- (2) Clip mounting (on case), where leads do overlap heatsink
- (3) Screw mounting with 4-40 screw, where washer diameter is ≤ 4.9 mm (0.19")
- (4) Pulse test: 300μs pulse width, 1% duty cycle




Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 – Forward Derating Curve
(Total)**

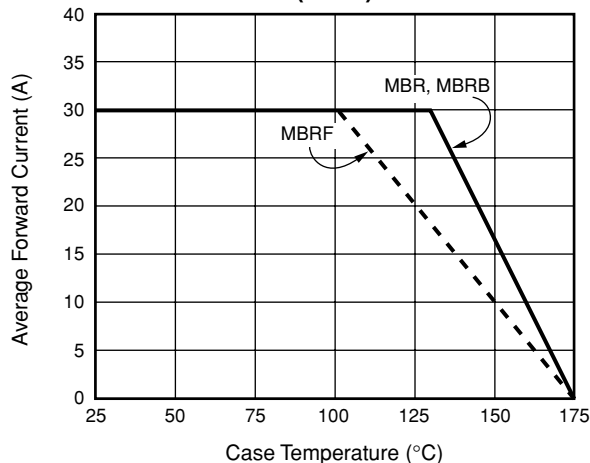


**Fig. 2 – Maximum Non-Repetitive
Peak Forward Surge Current Per Leg**

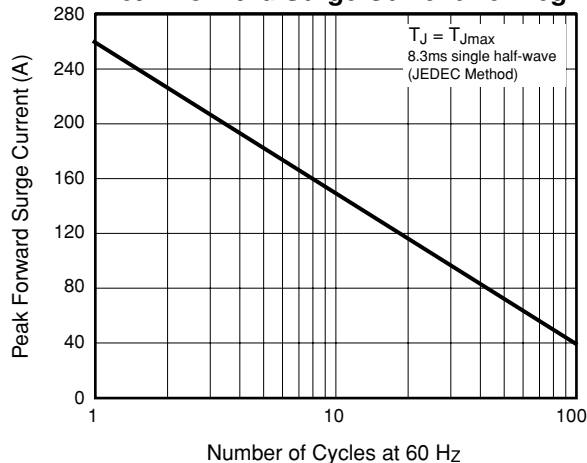


**Fig. 3 – Typical Instantaneous
Forward Characteristics Per Leg**

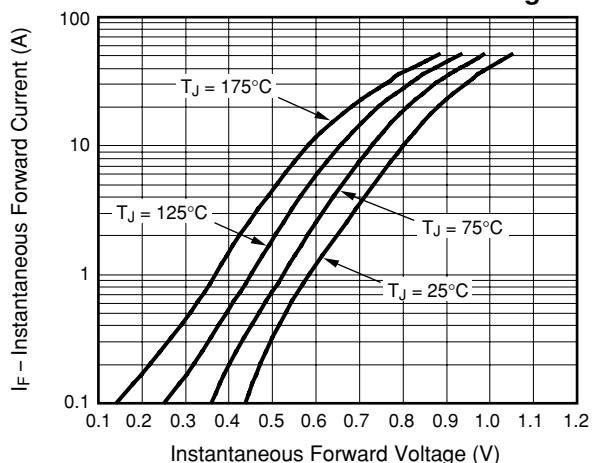

**Fig. 4 – Typical Reverse
Characteristics Per Leg**

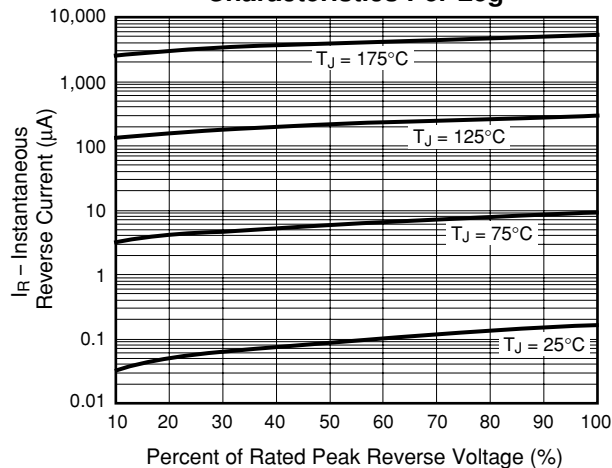

**Fig. 5 – Typical Junction Capacitance
Per Leg**

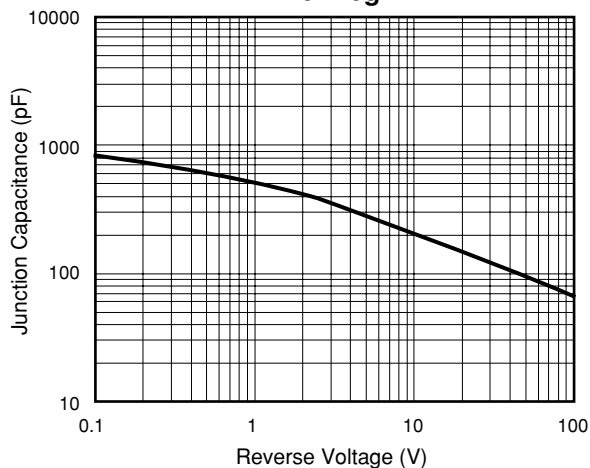

**Fig. 6 – Typical Transient
Thermal Impedance Per Leg**

