
2017-09-28
Product version 05
Document revision 0

Data sheet

Order No.: 1766262

Type: GMSTBA 2,5/ 5-G-7,62

Header

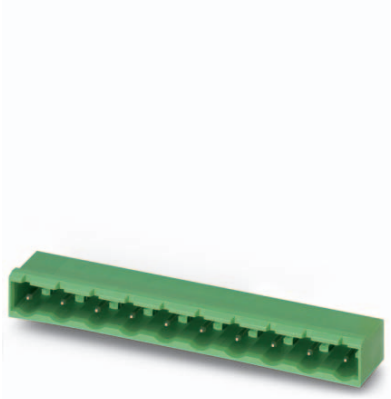

The figure shows a 10-position version of the product

1 Main features



- No. of pos. 5
- Nominal cross section 2.5 mm²
- Color green
- Pitch 7.62 mm
- Mounting type Wave soldering
- Nominal current 12 A
- Nominal voltage 630 V
- Connection direction 0 °
- Type of packaging packed in cardboard

2 Your advantages

- Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- Well-known mounting principle allows worldwide use
- Larger pitch for increased voltage requirements
- Closed contour for optimum stability of the plug-in connection
- Plug-in direction parallel to the PCB

Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1766262


© PHOENIX CONTACT 2017

3 Table of contents

1 Main features ... 1
2 Your advantages ... 1
3 Table of contents ... 2
4 3D model in PDF can be activated (Acrobat Reader only) ... 3
5 item properties ... 4
5.1 Material data ... 4
6 Dimensions ... 4
6.1 Dimensions for the product ... 4
6.2 Dimensions for PCB design ... 4
7 Series drawing ... 5
8 Packaging information ... 5
9 Application ... 5
9.1 Temperature limit values ... 5
10 Mechanical tests ... 6
11 Electrical tests ... 7
11.1 Electrical data ... 7
11.2 Air and creepage distances ... 7
12 Current carrying capacity/derating curves ... 8
13 Environmental and durability tests ... 9
13.1 Vibration test ... 9
14 Classification for connectors ... 9
15 Approvals ... 9
16 Commercial Data ... 11
17 corresponding plugs ... 11
18 Accessories ... 11
19 Combination tests ... 12

© PHOENIX CONTACT 2017

4 3D model in PDF can be activated (Acrobat Reader only)

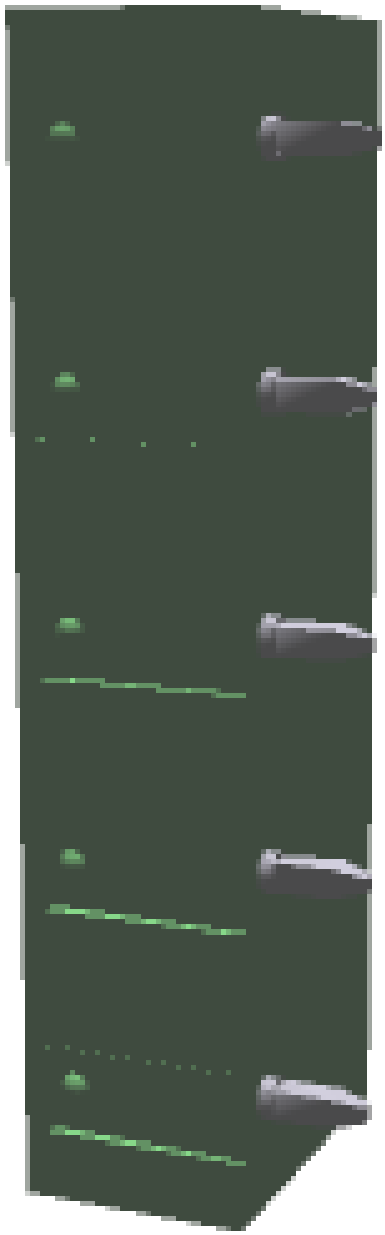

© PHOENIX CONTACT 2017

5 item properties

Order No.	1766262
Type	GMSTBA 2,5/ 5-G-7,62
Type of contact	Male connector
Range of articles	GMSTBA 2,5/..-G
Pitch	7.62 mm
Number of positions	5
Locking	without
Mounting type	Wave soldering
Pin layout	Linear pinning

5.1 Material data

Material of metal parts	
Note	WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201
Contact material	Cu alloy
Surface contact area	Ni 1 µm ... 3 µm , Sn 3 µm ... 5 µm
Soldering area surface	Ni 1 µm ... 3 µm , Sn 3 µm ... 5 µm
Surface characteristics	Tin-plated

Insulating material data	Housing
Insulating material	PA
CTI according to IEC 60112	600
Flammability rating according to UL 94	V0
Color	green (6021)
Glow wire flammability index GWFI according to EN 60695-2-12	850
Glow wire ignition temperature GWIT according to EN 60695-2-13	775
Temperature for the ball pressure test according to EN 60695-10-2	125 °C

6 Dimensions

6.1 Dimensions for the product

Length	12 mm
Width	38.1 mm
Height (without solder pin)	8.6 mm
Total height	11.8 mm
Solder pin [P]	3.2 mm
Dimension a	30.48 mm

6.2 Dimensions for PCB design

Hole diameter	1.4 mm
Pin dimensions	1,0 x 1,0

© PHOENIX CONTACT 2017

7 Series drawing

8 Packaging information

Type of packaging	packed in cardboard
Pieces per package	250

9 Application

9.1 Temperature limit values

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

© PHOENIX CONTACT 2017

10 Mechanical tests

Mechanical test group A	
Specification	IEC 61984:2008-10
Visual test	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	9 N
Withdraw strength per pos. approx.	6 N
Polarization and coding	Test passed
Specification	IEC 60512-13-5:2006-02
Test force	20 N
Contact retention in insert	Test passed
Specification	IEC 60512-15-1:2008-05
Test force per pos.	35 N

© PHOENIX CONTACT 2017

11 Electrical tests

11.1 Electrical data

Rated current / conductor cross section	12 A / 2.5 mm²
Rated insulation voltage (III/2)	630 V
Rated surge voltage (III/2)	6 kV
Contact resistance	1.4 mΩ
Degree of pollution	2

11.2 Air and creepage distances


Component	Header		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	400 V	630 V	630 V
Rated surge voltage	6 kV	6 kV	6 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	5.5 mm	5.5 mm	5.5 mm
Minimum value of the creepage path requirement in acc. with table	6.3 mm	3.2 mm	5 mm

© PHOENIX CONTACT 2017


12 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	2.5 mm²
Note	


Type: GMSTB 2,5/...-ST-7,62 with GMSTBA 2,5/...-G-7,62

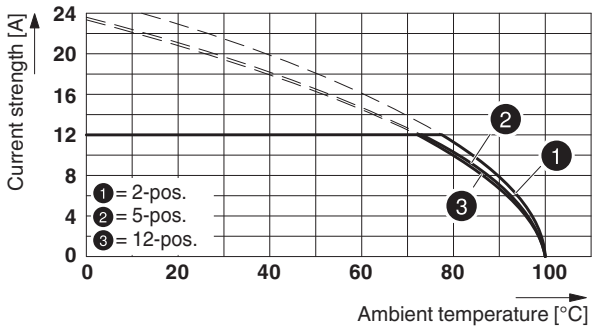

Type: GMVSTBR 2,5 HV/...-ST-7,62 with GMSTBA 2,5/...-G-7,62

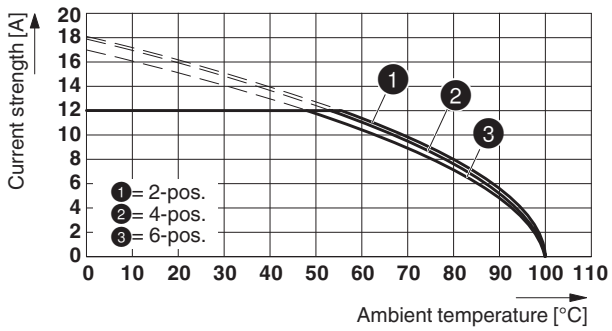

Type: GMVSTBW 2,5 HV/...-ST-7,62 with GMSTBA 2,5/...-G-7,62

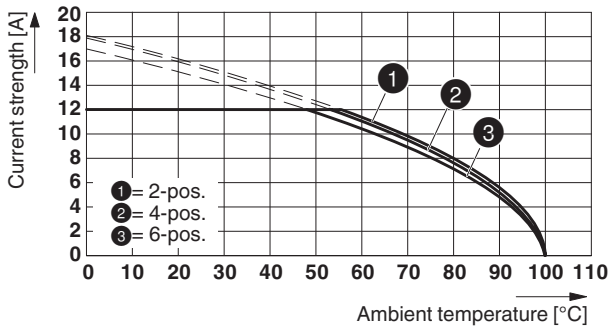

© PHOENIX CONTACT 2017

13 Environmental and durability tests

13.1 Vibration test

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis

14 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Protection against electric shock	Not encapsulated - touch-proof when inserted
Protection class	
Protective conductor	without PE
Lock	no

15 Approvals

CSA				
Use group	B	D		
mm²/AWG/kcmil				
Voltage	300 V	300 V		
Current	10 A	10 A		

UL Recognized				
Use group	B	D		
mm²/AWG/kcmil				
Voltage	300 V	300 V		
Current	15 A	10 A		

VDE Gutachten mit Fertigungsüberwachung				
mm²/AWG/kcmil				
Voltage	400 V			
Current	12 A			

cUL Recognized				
Use group	B	D		
mm²/AWG/kcmil				
Voltage	300 V	300 V		
Current	15 A	10 A		

© PHOENIX CONTACT 2017

1766262 GMSTBA 2,5/ 5-G-7,62

IECEE CB Scheme					
mm²/AWG/kcmil					
Voltage	400 V				
Current	12 A				

EAC

cULus Recognized

© PHOENIX CONTACT 2017

16 Commercial Data

Order No.	1766262
Type	GMSTBA 2,5/ 5-G-7,62
Pieces per package	250
Net weight	2.478 g
GTIN	4017918032289
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

17 corresponding plugs




Order No.	Type
1767038	GMSTB 2,5/ 5-ST-7,62
1806148	FRONT-GMSTB 2,5/ 5-ST-7,62
1823095	GMSTBP 2,5/ 5-ST-7,62
1832442	GMVSTBW 2,5/ 5-ST-7,62
1832552	GMVSTBR 2,5/ 5-ST-7,62
1939662	GFKC 2,5/ 5-ST-7,62

18 Accessories

Description	Order No.	Type
Coding section, inserted into the recess in the header or the inverted plug, red insulating material	1734401	CR-MSTB
Keying cap, for forming sections, plugs onto header pin, green insulating material	1755477	MSTB-BL
	0804549	SK 7,62/3,8:FORTL.ZAHLEN


© PHOENIX CONTACT 2017


19 Combination tests

					
	GMSTBA 2,5/..-G	**GMSTB 2,5/..-ST**	**FRONT-GMSTB 2,5/..-ST**	**GMVSTBR 2,5/..-ST**	**GICV 2,5/..-G**
Specification		IEC 61984	IEC 61984	IEC 61984	IEC 61984
Mechanical tests (A)					
Insertion/withdrawal force per position		approx. 9 N / 6 N			
Polarization when inserted Requirement >20 N		Test passed			
Contact holder in insert Requirements >20 N		Test passed			
Durability tests (B)					
Contact resistance R_1		1.4 mΩ			
Insertion/withdrawal cycles		25			
Contact resistance R_2		1.5 mΩ			
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 µs)		7.3 kV			
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)		3.31 kV			
Insulation resistance Requirements > 5 MΩ		2.2 TΩ			
Thermal tests (C)					
Tested number of positions		12			
Tested conductor cross section		2.5 mm^2			
Test current		12 A DC			
Upper limiting temperature Requirements < 100°C		Test passed			
Climatic tests (D)					
Test sequence 1: low temperature storage		-40 °C/2 h			
Test sequence 2: heat storage		100 °C/168 h			
Test sequence 3: noxious gas storage (ISO 6988)		0.2 dm^3 SO_2 on 300 dm^3/ 40 °C/1 cycle			
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 µs)		7.3 kV			
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)		3.31 kV			
Environmental and endurance tests (E)					
Specification		IEC 61984:2008-10			
Degree of protection		Finger safety with IP20 test finger			

© PHOENIX CONTACT 2017

1766262 GMSTBA 2,5/ 5-G-7,62







	GMSTBA 2,5/..-G	GMVSTBR 2,5 HV/ ..-ST	GMVSTBW 2,5 HV/..-ST		
Specification		IEC 61984	IEC 61984		
Mechanical tests (A)					
Insertion/withdrawal force per position		approx. 8 N / 8 N	approx. 8 N / 8 N		
Polarization when inserted Requirement >20 N		Test passed	Test passed		
Contact holder in insert Requirements >20 N		Test passed	Test passed		
Durability tests (B)					
Contact resistance R_1		2.5 mΩ	2.5 mΩ		
Insertion/withdrawal cycles		25	25		
Contact resistance R_2		2.5 mΩ	2.5 mΩ		
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 µs)		4.8 kV	4.8 kV		
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)		2.21 kV	2.21 kV		
Insulation resistance Requirements > 5 MΩ		> 10 TΩ	> 10 TΩ		
Thermal tests (C)					
Tested number of positions		6	6		
Tested conductor cross section		2.5 mm²	2.5 mm²		
Test current		12 A	12 A		
Upper limiting temperature Requirements < 100°C		Test passed	Test passed		
Climatic tests (D)					
Test sequence 1: low temperature storage		-40 °C/2 h	-40 °C/2 h		
Test sequence 2: heat storage		100 °C/168 h	100 °C/168 h		
Test sequence 3: noxious gas storage (ISO 6988)		KFW 0.2 S/1 cycle	KFW 0.2 S/1 cycle		
Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 µs)		4.8 kV	4.8 kV		
Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz)		2.21 kV	2.21 kV		
Environmental and endurance tests (E)					
Specification		IEC 61984:2001-06	IEC 61984:2001-06		
Degree of protection		IP20	IP20		

© PHOENIX CONTACT 2017