


## PIN HEADERS

- Industry Compatible
- Competitively priced
- Various plated contacts available
- Various pin lengths available
- 2.54mm pitch

## DUAL BODY DOUBLE ROW

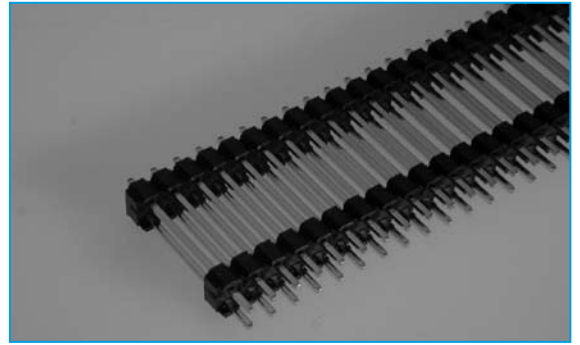


SECTION 8

### SPECIFICATION


#### Material & Finish

<b>Contact Material:</b>	Brass
<b>Insulator Material:</b>	PBT & Glass-Fibre Reinforced UL94V-0
<b>Current Rating:</b>	1 A DC
<b>Contact Resistance:</b>	30M $\Omega$ Max at 6V DC 0.3A
<b>Insulator Resistance:</b>	1000M $\Omega$ Min at 500V DC
<b>Dielectric Withstanding</b>	
<b>Voltage:</b>	500V AC for One Minute
<b>Operating Temperature:</b>	-40°C to + 105°C

### OUTLINE DRAWING

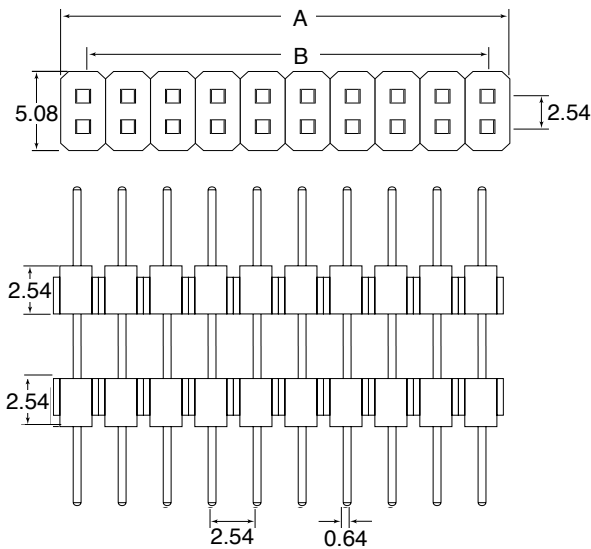

A = 2.54 x Position No  
 B = 2.54 x (Position N<sup>o</sup> -1)



### ORDERING INFORMATION

DBC	PH	C20	32	A	G	1	-XXX
Dubilier Connectors	Pin Header Connector	Series	No. of Ways	Contact Material	Contact Plating	Colour	Unique Special Code
			02= 2x2 Ways Thro to 40= 40x2 Ways	A= Brass	G= Gold Flash T= Tin Plated S= Selective	1= Black	*See below

\*Dubilier will allocate a special code to distinguish the pins lengths E,H,F and G