TAIWAN SEMICONDUCTOR

RoHS COMPLIANCE

TSB772

Low Vcesat PNP Transistor

TO-126



Pin Definition:
1. Emitter
2. Collector
3. Base

PRODUCT SUMMARY

BV_{CBO}	-50V
BV_{CEO}	-30V
I_C	-3A
$V_{CE(SAT)}$	-0.5V @ I_C / I_B = -2A / -200mA

Features

- Low $V_{CE(SAT)}$ -0.3 @ I_C / I_B = 2A / 200mA (Typ.)
- Complementary part with TSD882

Structure

- Epitaxial Planar Type
- PNP Silicon Transistor

Ordering Information

Part No.	Package	Packing
TSB772CK B0G	TO-126	250pcs / Bulk
TSB772CK C0G	TO-126	50pcs / Tube

Note: “G” denote for Halogen Free Product

Absolute Maximum Rating (T_A=25°C unless otherwise noted)

Parameter		Symbol	Limit	Unit
Collector-Base Voltage		V_{CBO}	-50	V
Collector-Emitter Voltage		V_{CEO}	-30	V
Emitter-Base Voltage		V_{EBO}	-5	V
Collector Current	DC	I_C	-3	A
	Pulse		-7 (note)	
Collector Power Dissipation	T_A = 25°C	P_D	1	W
	T_C = 25°C		10	
Operating Junction Temperature		T_J	+150	°C
Operating Junction and Storage Temperature Range		T_{STG}	- 55 to +150	°C

Note: Single pulse, Pw≤350us, Duty≤2%

Electrical Specifications (T_A=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Collector-Base Breakdown Voltage	I_C = -50uA, I_E = 0	BV_{CBO}	-50	--	--	V
Collector-Emitter Breakdown Voltage	I_C = -1mA, I_B = 0	BV_{CEO}	-30	--	--	V
Emitter-Base Breakdown Voltage	I_E = -50uA, I_C = 0	BV_{EBO}	-5	--	--	V
Collector Cutoff Current	V_{CB} = -30V, I_E = 0	I_{CBO}	--	--	-1	uA
Emitter Cutoff Current	V_{EB} = 3V, I_C = 0	I_{EBO}	--	--	-1	uA
Collector-Emitter Saturation Voltage	I_C / I_B = -2A / -200mA	*$V_{CE(SAT)}$	--	-0.3	-0.5	V
Base-Emitter Saturation Voltage	I_C / I_B = -2A / -200mA	*$V_{BE(SAT)}$	--	-1	-2	V
DC Current Transfer Ratio	V_{CE} = -2V, I_C = -1A	*h_{FE}	100	--	500	
Transition Frequency	V_{CE} =-5V, I_C=-100mA, f=100MHz	f_T	--	80	--	MHz
Output Capacitance	V_{CB} = -10V, f=1MHz	Cob	--	55	--	pF

* Pulse Test: Pulse Width ≤380uS, Duty Cycle≤2%

TSB772
Low Vcesat PNP Transistor

Electrical Characteristics Curve (Ta = 25°C, unless otherwise noted)

Figure 1. DC Current Gain

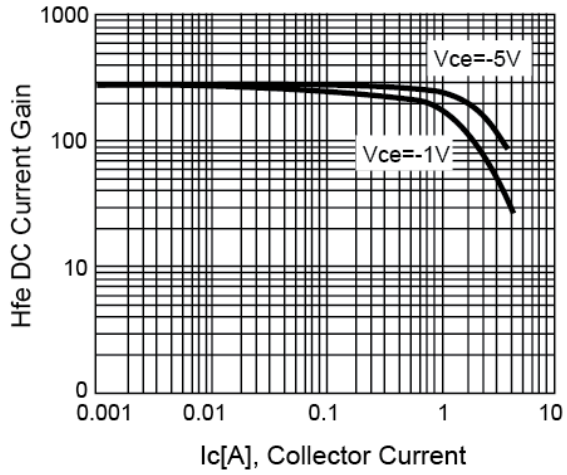


Figure 2. $V_{CE(SAT)}$ v.s. Ic

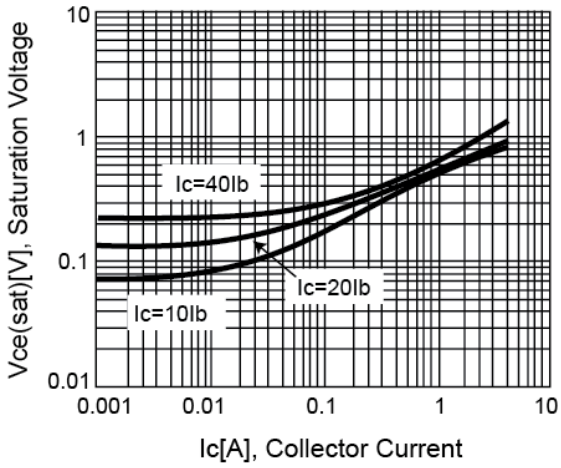


Figure 3. $V_{BE(SAT)}$ v.s. Ic



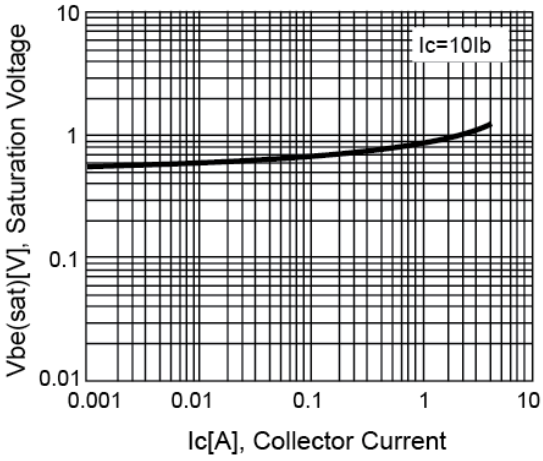


Figure 4. Power Derating Curve

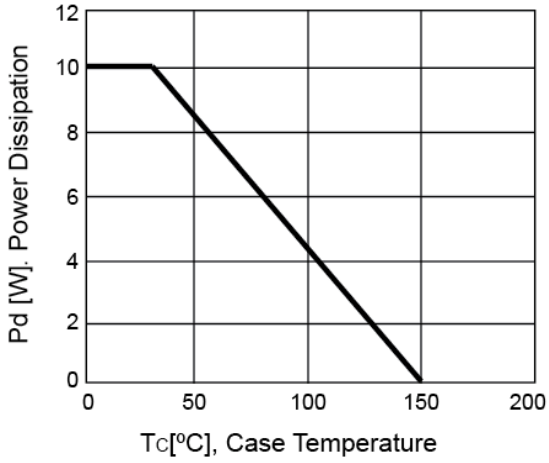


TSB772
Low Vcesat PNP Transistor

TO-126 Mechanical Drawing

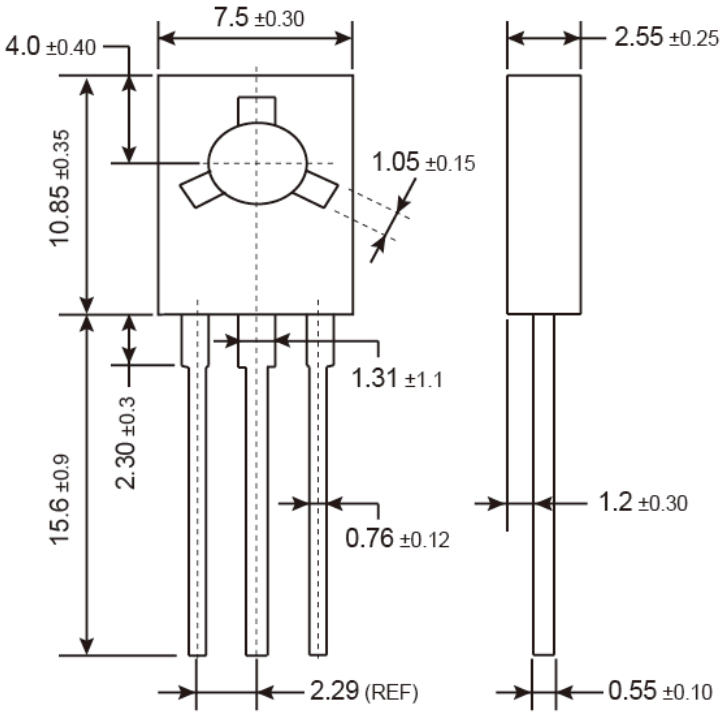

Unit: Millimeters

Marking Diagram

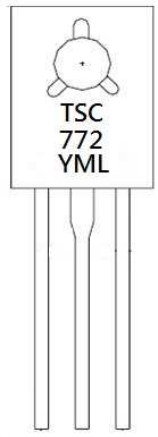

Y = Year Code
M = Month Code for Halogen Free Product
(**O**=Jan, **P**=Feb, **Q**=Mar, **R**=Apl, **S**=May, **T**=Jun, **U**=Jul, **V**=Aug, **W**=Sep, **X**=Oct, **Y**=Nov, **Z**=Dec)
L = Lot Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.