




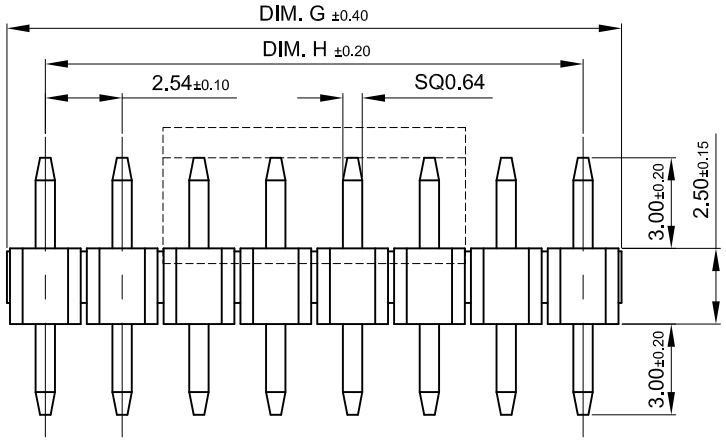


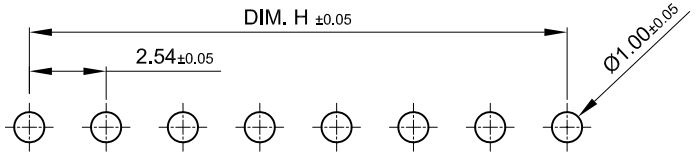

PCB Layout

Tape & Reel packaging (with Pick and Place Cap) 350pcs per reel

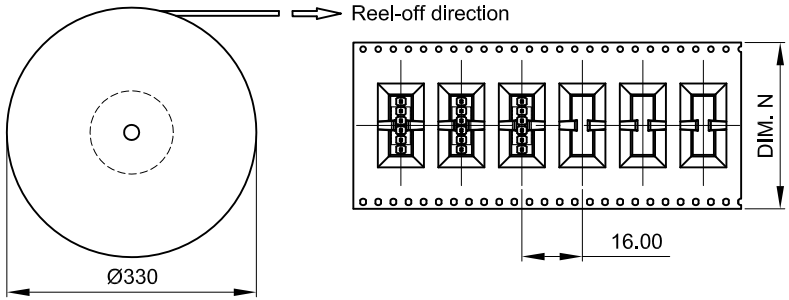

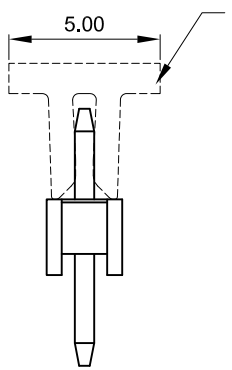

PE Bag
Packaging Q'ty

No. of positions	Q'ty per bag
14	500
12	500
10	500
8	1000
6	1000
4	1000
2	1000

Tube
Packaging Q'ty

No. of positions	Q'ty per tube
14	16
12	19
10	22
8	28
6	38
4	57
2	114

Id-Nr. PE Bag 10u" gold plating	Id-Nr. Tape&Reel 10u" gold plating	Id-Nr. Tube 10u" gold plating	Id-Nr. PE Bag 0.8u" gold plating	Id-Nr. Tape&Reel 0.8u" gold plating	Id-Nr. Tube 0.8u" gold plating	No of Pos.	DIM. G	DIM. H	DIM. N	DIM. P
129481	129474	129467	129460	129453	129446	14	35.56	33.02	56	10.00
129480	129473	129466	129459	129452	129445	12	30.48	27.94	56	10.00
129479	129472	129465	129458	129451	129444	10	25.40	22.86	44	10.00
129478	129471	129464	129457	129450	129443	8	20.32	17.78	44	10.00
129477	129470	129463	129456	129449	129442	6	15.24	12.70	32	10.00
129476	129469	129462	129455	129448	129441	4	10.16	7.62	24	10.00
129475	129468	129461	129454	129447	129440	2	5.08	2.54	24	7.00

Notes:

Material and finish:
Contact: Brass
Gold over 30~80u" nickel plating
Insulation: PA9T UL94-V0, color black

Specifications:
Current rating: 3.0A
Contact resistance: 20mΩ Max.
Withstanding Voltage: 1000V AC/DC
Insulation resistance: 1000MΩ Min.
Operating temperature: -40°C to +105°C

Information:

Tolerances
X. ±0.50 X°. ±10°
X.X ±0.40 X.X° ±5°
X.XX ±0.25 X.XX° ±3°

All Dimensions in mm

Scale 4:1

For further information about I. D. number see manufacturing document

All rights reserved. Only for information. To insure that this is the latest version of this drawing, contact one of the ERNI companies before using

Subject to modification without prior notice. Drawing will not be updated.

Designation
2.54mm Vertical Single Row Header
THR

ERNI Asia Holding
www.erni.com

129439

Rev.		Date
A		13-08-2013

129439.DWG