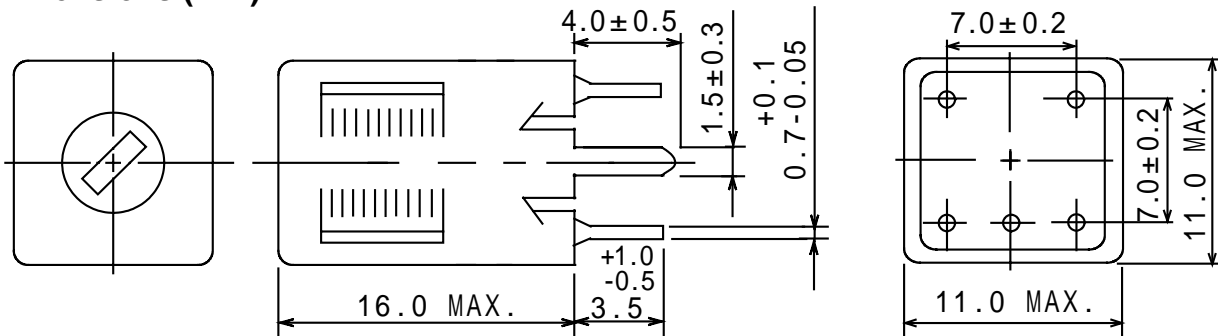


Type: SM-10F
Product Description


- 11.0 × 11.0mm Max.(L × W), 16.0mm Max. Height.
- Operating frequency: 30MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.

Feature

- High inductance fixed shielded type.
- Can be used as DC-DC converter transformer.
- RoHS Compliance

Dimensions (mm)


- * Dimension does not include solder used on coil.
- * Pin pitch should be measured at the root of terminal.

Connection (Bottom View)


"S" is winding start.

Specification (Part No.: 4309-T001)

Item	(4-6)	Measuring Condition
Inductance	850μH±6% Variable	1kHz
Unloaded Qu	60 Min.	100kHz