




300mA CMOS LDO



Pin Configuration

SC9167			SC9167		
1	VIN		1	GND	
2	GND		2	VDD	
3	EN		3	OUT	
4	BYP				
5	OUT				
SC9167					
1	GND				
2	OUT				
3	VDD				

* Die Attach: Conductive Epoxy

Absolute Maximum Ratings

Parameter	Maximum	Unit
Input Voltage	5.5	V
Output Current	PD/(VIN-VO)	mA
Output Voltage	GND-0.3 to VIN +0.3	V
ESD Classification	3*	

Caution: Stress above the listed absolute maximum rating may cause permanent damage to the device.

* HBM CLASS 3: $\geq 4000V$

Recommended Operating Conditions

Parameter	Symbol	Rating	Unit
Ambient temperature range	T_A	-40 to +85	$^{\circ}C$
Junction temperature range	T_J	-40 to +125	$^{\circ}C$



深圳市富满电子有限公司

SHENZHEN FUMAN ELECTRONICS CO., LTD.

SC9167 (文件编号: S&CIC0661)

300mA CMOS LDO

Thermal Information

Parameter	Package	Die Attach	Symbol	Max	Unit
Thermal resistance (Junction to case)	*SOT-25	Conductive Epoxy	θ_{JC}	81	°C/W
Thermal resistance (Junction to ambient)	SOT-25	Conductive Epoxy	θ_{JA}	260	
Internal power Dissipation	SOT-25	Conductive Epoxy	P_D	400	mW
Maximum junction temperature				150	°C
Solder Iron (10Sec)**				350	°C

* Measure θ_{JC} on center of molding compound if IC has no tab.

** MIL-STD-202G 210F

Electrical Specifications (TA=25°C unless otherwise noted)

parameter	Symbol	Test Condition		Min	Typ	Max	Units
Input voltage	V_{IN}	--		Note 1	--	6.5	V
Output voltage accuracy	V_O	$I_O=1mA$		-1.5	--	1.5	%
		$I_O=300mA$		-2.5	--	2.5	
Dropout voltage	$V_{DROPOUT}$	$I_O=300mA$ $V_O=V_{O(NOM)}$ -2.0%	$1.2V \leq V_{O(NOM)} \leq 2.0V$	--	--	1300	mV
			$2.0V < V_{O(NOM)} \leq 2.8V$	--	--	400	
			$2.8 < V_{O(NOM)}$	--	--	300	
Output current	I_O	$V_O > 1.2V$		300	--	--	mA
Current limit	I_{LIM}	$V_O > 1.2V$		300	450	--	mA
Short circuit current, Note2	I_{SC}	$V_O < 0.8V$		--	150	300	mA
Quiescent current	I_Q	$I_O=0mA$		--	30	50	uA
Ground pin current	I_{GND}	$I_O=1mA$ to 300mA		--	35	--	uA
Line regulation	REG_{LINE}	$I_O=1mA$ $V_{IN}=V_O+1$ to V_O+2	$1.2V \leq V_O \leq 1.4V$	-0.2	--	0.2	%
			$1.4V < V_O \leq 2.0V$	-0.15	--	0.15	
			$2.0V < V_O < 4.0V$	-0.1	0.02	0.1	
			$4.0V < V_O$	-0.4	0.2	0.4	
Load regulation	REG_{LOAD}	$I_O=1mA$ to 300mA		-1	0.2	1	%
Over temperature shutdown	OTS			--	150	--	°C
Over temperature hysteresis	OTH			--	30	--	°C
V_O temperature coefficient	TC			--	30	--	ppm/°C
Power supply rejection	PSRR	$I_O=100mA$ $C_O=2.2uF$	$f=100Hz$	--	60	--	dB
			$f=1KHz$	--	50	--	dB
			$f=10KHz$	--	20	--	dB
Output voltage noise	eN	$f=10Hz$ to 100KHz $I_O=10mA$	$C_O=2.2uF$	--	30	--	uVrms



SC9167 (文件编号: S&CIC0661)

300mA CMOS LDO

EN input threshold	V_{EH}	$V_{IN}=2.7V$ to $5.5V$	2	--	V_{in}	V
	V_{EL}	$V_{IN}=2.7V$ to $5.5V$	0	--	0.4	V
EN input bias current	I_{EH}	$V_{EN}=V_{IN}$, $V_{IN}=2.7V$ to $5.5V$	--	--	0.1	μA
	I_{EL}	$V_{EN}=0V$, $V_{IN}=2.7V$ to $5.5V$	--	--	0.5	μA
Shutdown supply current	I_{SD}	$V_{IN}=5V$, $V_O=0V$, $V_{EN}<V_{EL}$	--	0.5	1	μA
Shutdown output voltage	$V_{O,SD}$	$I_O=0.4mA$, $V_{EN}<V_{EL}$	0	--	0.4	V

Note1: $V_{IN(MIN)}=V_{OUT}+V_{DROPOUT}$

Note2: To prevent the short circuit current protection feature from being prematurely activated, the input voltage must be applied before a current source load is applied.

Detailed Description

The SC9167 family of CMOS regulators contain a PMOS pass transistor, voltage reference, error amplifier, over-current protection, and thermal shutdown.

The P-channel pass transistor receives data from the error amplifier, over-current shutdown, and thermal protection circuits. During normal operation, the error amplifier compares the output voltage to a precision reference. Over-current and Thermal shutdown circuits become active when the junction temperature exceeds $150^{\circ}C$, or the current exceeds 300mA. During thermal shutdown, the output voltage remains low. Normal operation is restored when the junction temperature drops below $120^{\circ}C$.

The SC9167 switches from voltage mode to current mode when the load exceeds the rated output current. This prevents over-stress. The SC9167 also incorporates current foldback to reduce power dissipation when the output is short circuited. This feature becomes active when the output drops below 0.8volts, and reduces the current flow by 65%. Full current is restored when the voltage exceeds 0.8 volts.

External Capacitors

The SC9167 is stable with an output capacitor to ground of 2.2 μF or greater. Ceramic capacitors have the lowest ESR, and will offer the best AC performance. Conversely, Aluminum Electrolytic capacitors exhibit the highest ESR, resulting in the poorest AC response. Unfortunately, large value ceramic capacitors are comparatively expensive. One option is to parallel a 0.1 μF

ceramic capacitor with a 10 μF Aluminum Electrolytic. The benefit is low ESR, high capacitance, and low overall cost.

A second capacitor is recommended between the input and ground to stabilize V_{in} . The input capacitor should be at least 0.1 μF to have a beneficial effect.

A third capacitor can be connected between the BYPASS pin and GND. This capacitor can be a low cost Polyester Film variety between the value of 0.001~0.01 μF . A larger capacitor improves the AC ripple rejection, but also makes the output come up slowly. This "Soft" turn-on is desirable in some applications to limit turn-on surges.


All capacitors should be placed in close proximity to the pins. A "Quiet" ground termination is desirable. This can be achieved with a "Star" connection.

Enable


The Enable pin normally floats high. When actively, pulled low, the PMOS pass transistor shuts off, and all internal circuits are powered down. In this state, the quiescent current is less than 1 μA . This pin behaves much like an electronic switch.




Load Step (1mA—300mA)

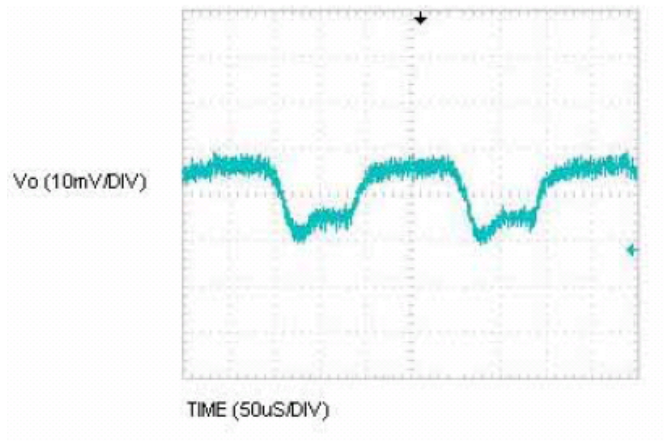


Overtemperature Shutdown

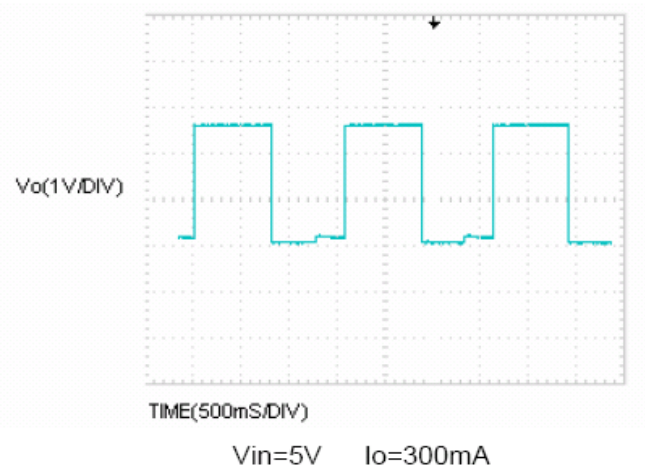


Chip Enable Transient Response

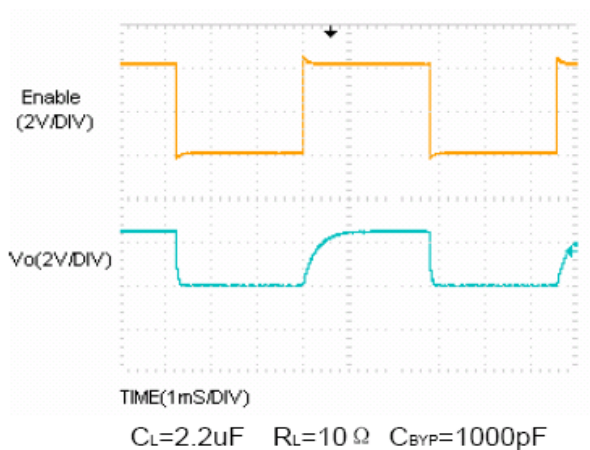

Chip Enable Transient Response

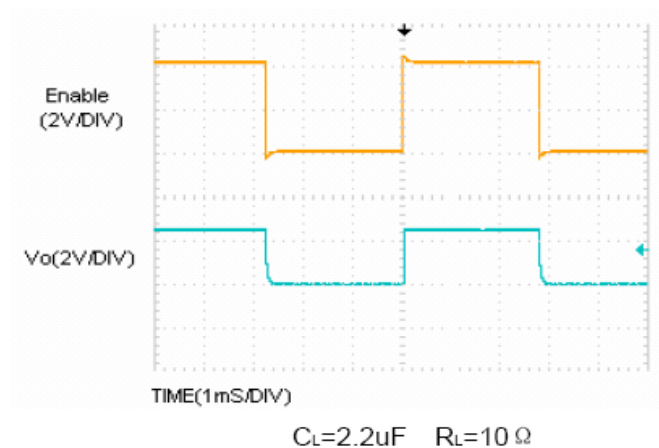


Ground Current vs. Input Voltage

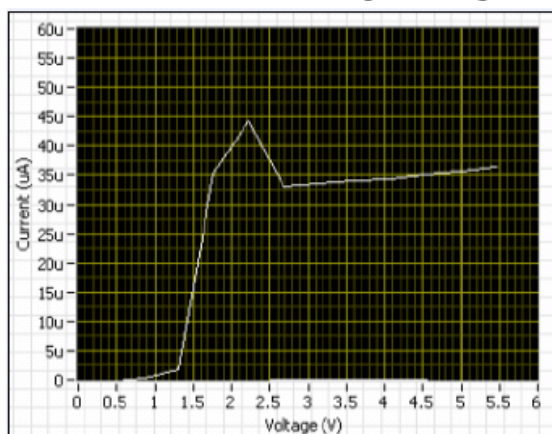



Tape and Reel Dimension

SOT-25

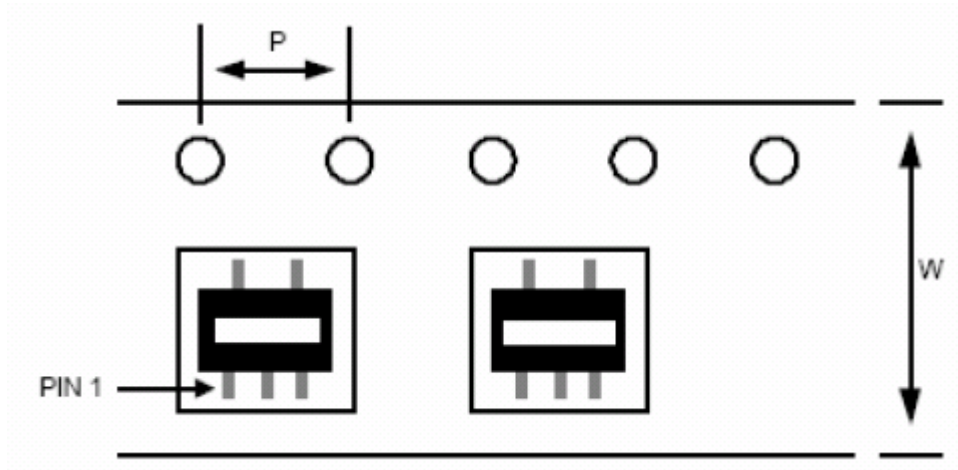

Carrier Tape, Number of Components Per Reel and Reel Size

Package	Carrier Width (W)	Pitch (P)	Part Per Full Reel	Reel Size
SOT-25	$8.0 \pm 0.1\text{mm}$	$4.0 \pm 0.1\text{mm}$	3000PCS	$180 \pm 1\text{mm}$