


SHEET 1 OF 1

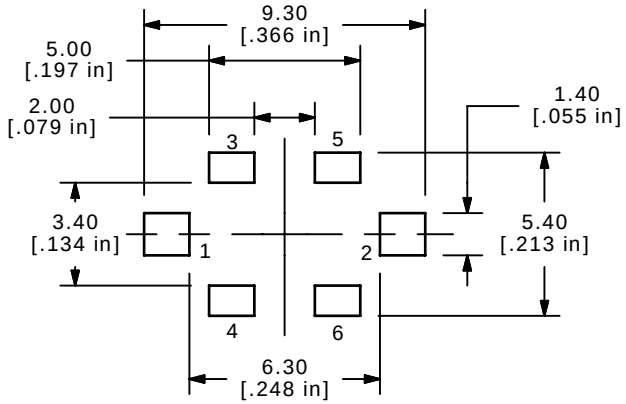



PC MOUNTING





▲ CIRCUIT

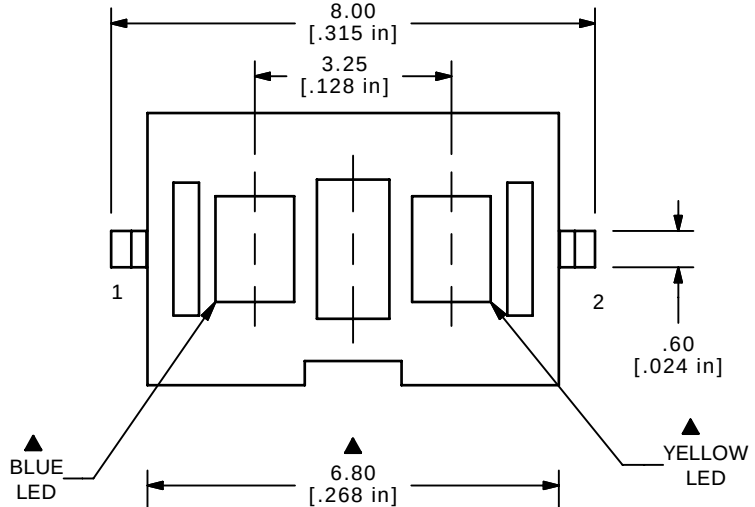

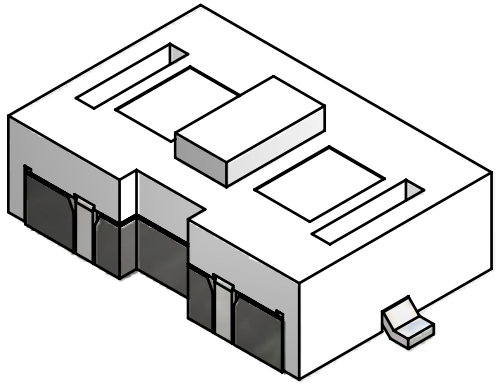

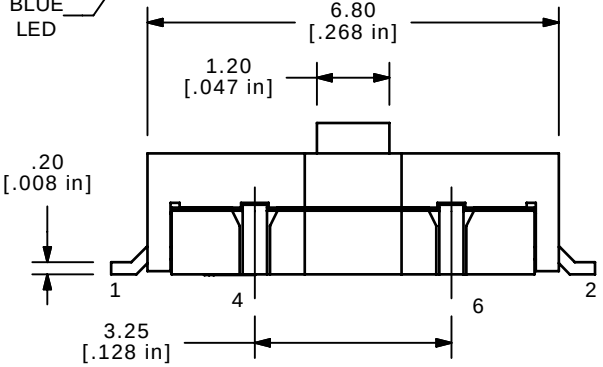

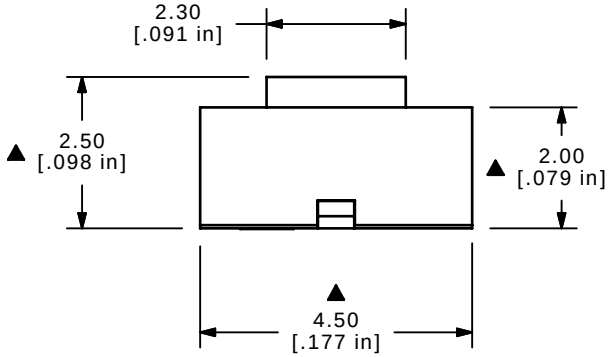

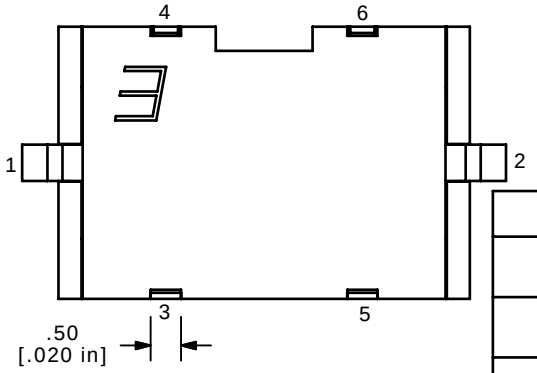

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 12VDC, 50mA MAX.
4. CONTACT RESISTANCE: 500mΩ MAX.
5. INSULATION RESISTANCE: 100VDC, 100MΩ MIN.
6. TRAVEL: 0.25 mm
▲7. OPERATING FORCE: 160 +75/-30gf
8. OPERATING TEMPURATURE: -20˚C TO 70˚C
9. OPERATING LIFE: 30,000 CYCLES.
10. PACKAGING: TAPE & REEL, 3000 PIECES PER REEL
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT

LED Specifications	Units	BLUE	YELLOW
Forward Current	mA	20	20
Forward Voltage	V	2.8 MIN 3.3 MAX	2.0 TYP 2.5MAX
Luminous Intensity@20mA	mcd	80 TYP	160 TYP

REV	PCR NO	DESCRIPTION	DATE	BY
A	20604	RELEASED FOR PRODUCTION	5/14/12	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH

TITLE TL3200AF160BYQ

SCALE	DATE	DR	DWG	REV
8:1	5/14/2012	rc	B200116	A