

DOUBLE-BALANCED MICROWAVE MIXER



SURFACE MOUNT MODEL: SGS-5-13

WIDE BANDWIDTH - GALAXY SERIES

3 - 19 GHz


FEATURES:

- ▶ Multi-Octave Bandwidth
- ▶ Schottky Diode Mixers
- ▶ Low Conversion Loss
- ▶ RoHS Compliant
- ▶ SYNSTRIP® Multi-Layer Technology

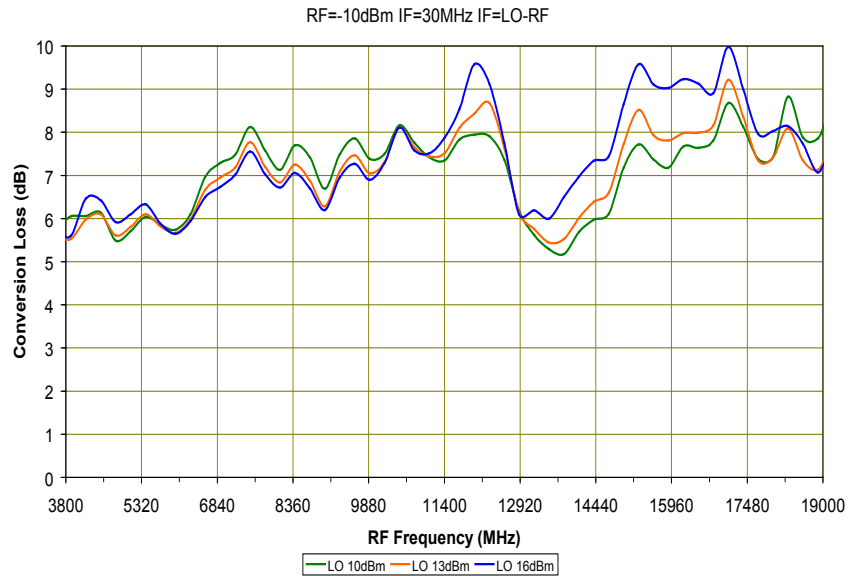

SPECIFICATIONS (Rev. C 12/13/06)

Frequency (GHz)	RF/LO	IF	
	3 - 19	DC - 4	
Conversion Loss (dB)	Typ.	Max.	
	7.5	11	
Isolation (dB)		Typ.	Min.
	LO/RF	25	15
	LO/IF	12	5
	RF/IF	20	7
LO Power	+13 dBm (Nom.)		
1 dB Compression Point	0 dBm (Typ.)		
Input IP ³	+12.5 dBm (Typ.)		
RF Input Power	100 mW (Max.)		
Impedance	50 Ohms (Nom.)		
Operating Temperature Range	-40 to +85 °C		

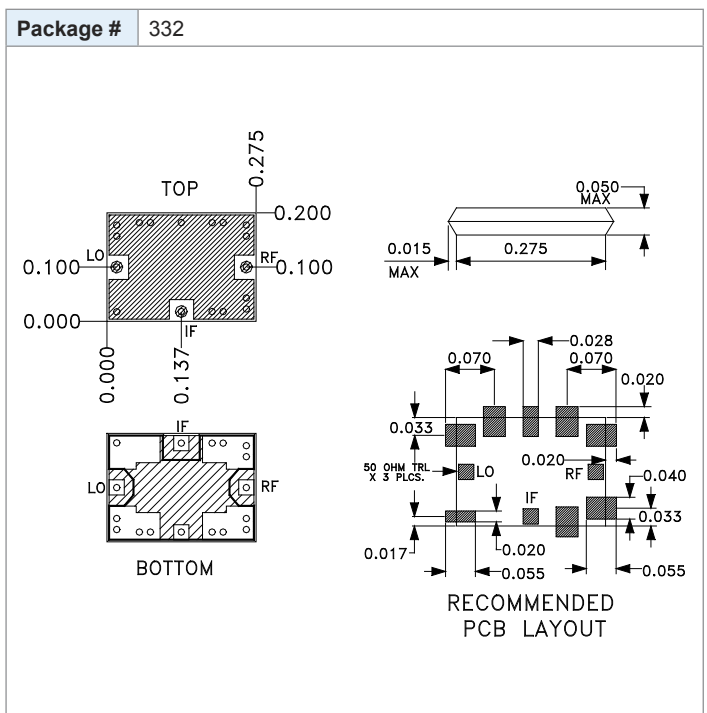



DOUBLE-BALANCED MICROWAVE MIXER

SURFACE MOUNT MODEL: SGS-5-13

WIDE BANDWIDTH - GALAXY SERIES

3 - 19 GHz

PERFORMANCE PLOTS

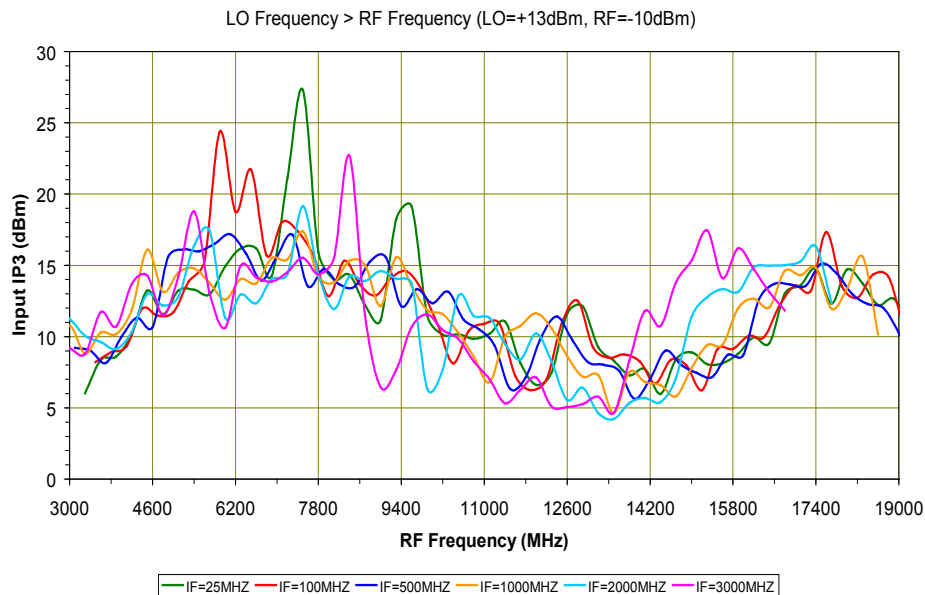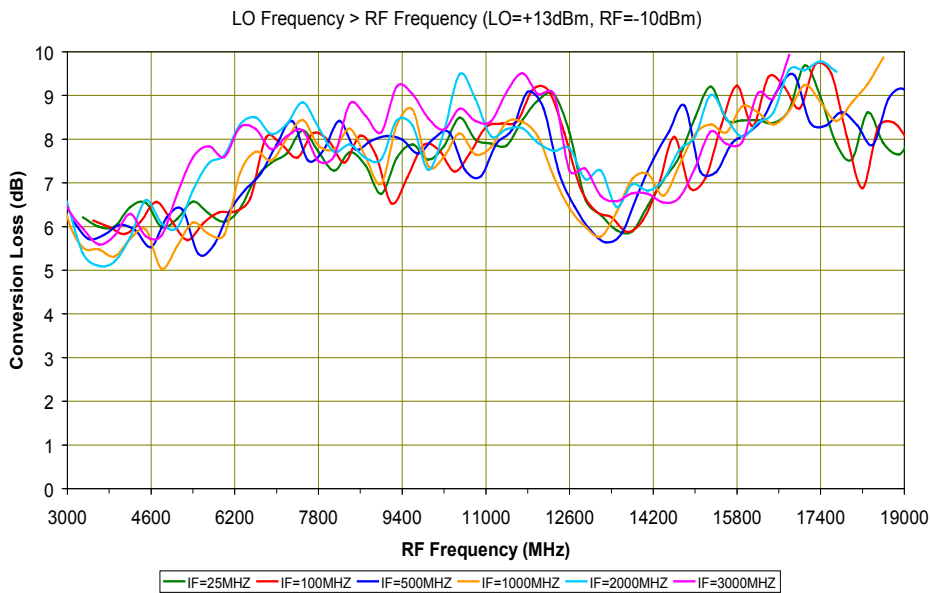



DOUBLE-BALANCED MICROWAVE MIXER

SURFACE MOUNT MODEL: SGS-5-13

WIDE BANDWIDTH - GALAXY SERIES

3 - 19 GHz

PERFORMANCE PLOTS

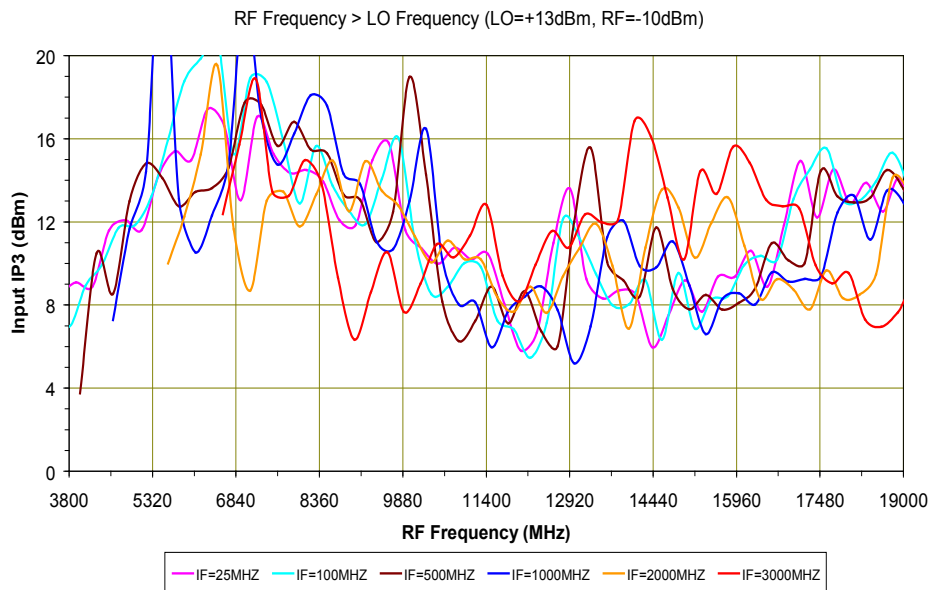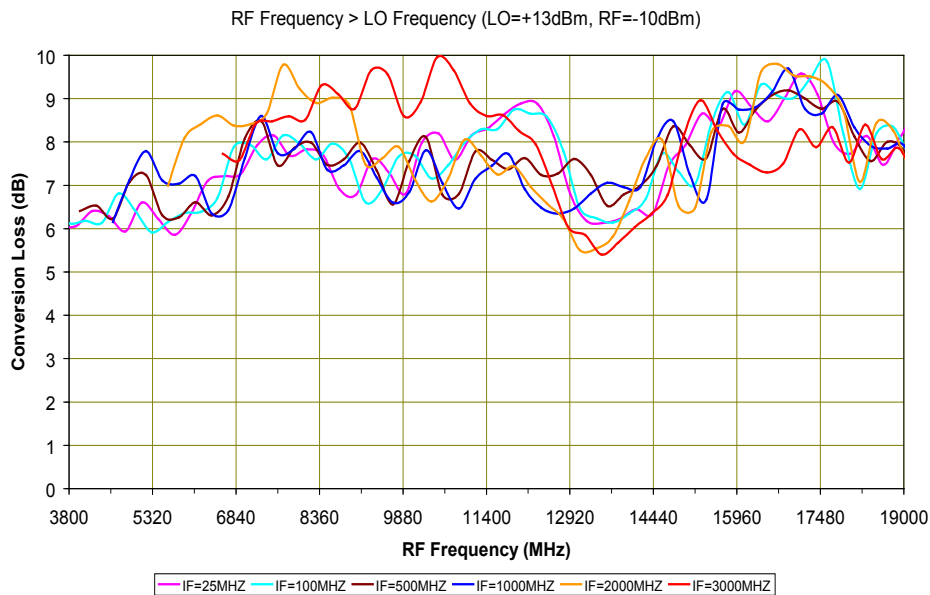



DOUBLE-BALANCED MICROWAVE MIXER

SURFACE MOUNT MODEL: SGS-5-13

WIDE BANDWIDTH - GALAXY SERIES

3 - 19 GHz

PERFORMANCE PLOTS

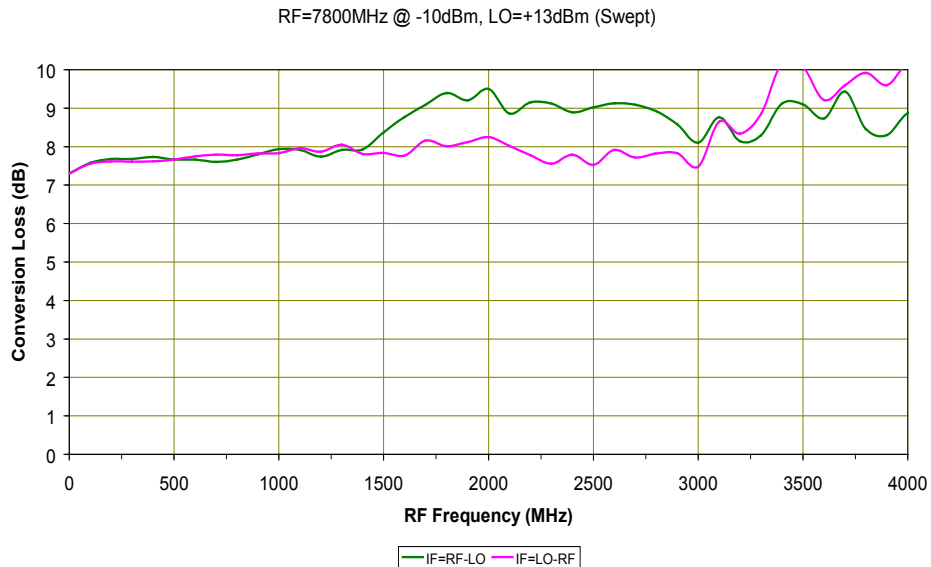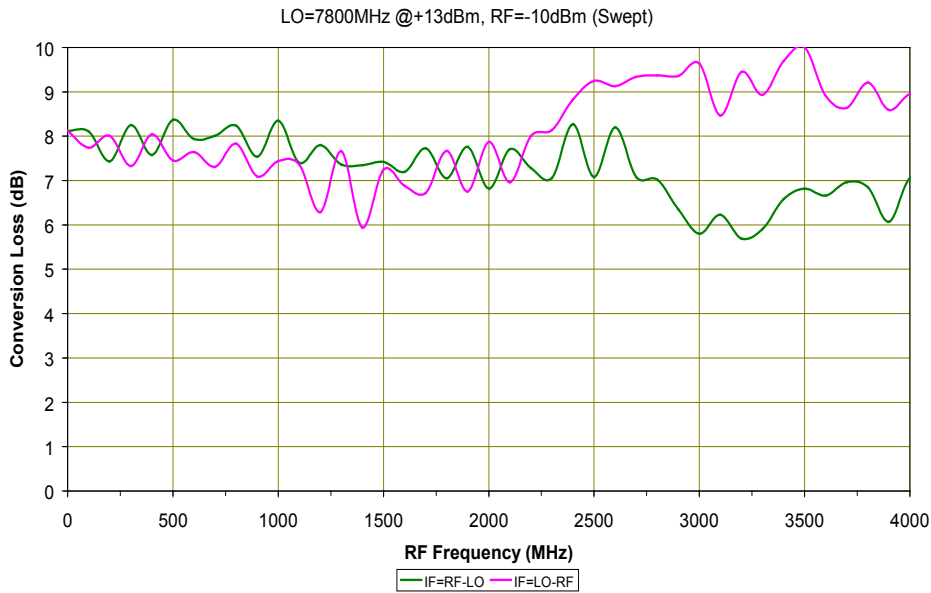



DOUBLE-BALANCED MICROWAVE MIXER

SURFACE MOUNT MODEL: SGS-5-13

WIDE BANDWIDTH - GALAXY SERIES

3 - 19 GHz

PERFORMANCE PLOTS

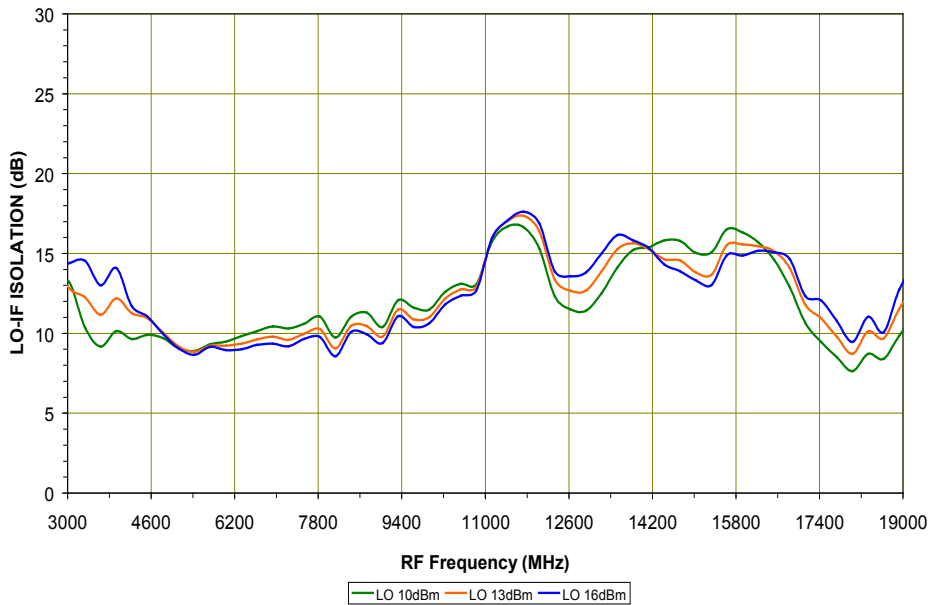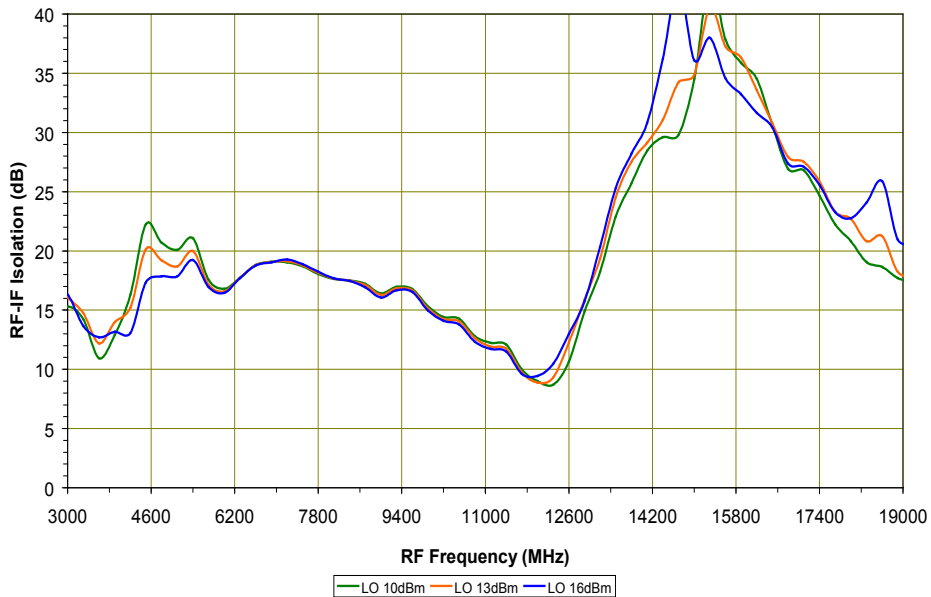


DOUBLE-BALANCED MICROWAVE MIXER

SURFACE MOUNT MODEL: SGS-5-13

WIDE BANDWIDTH - GALAXY SERIES

3 - 19 GHz

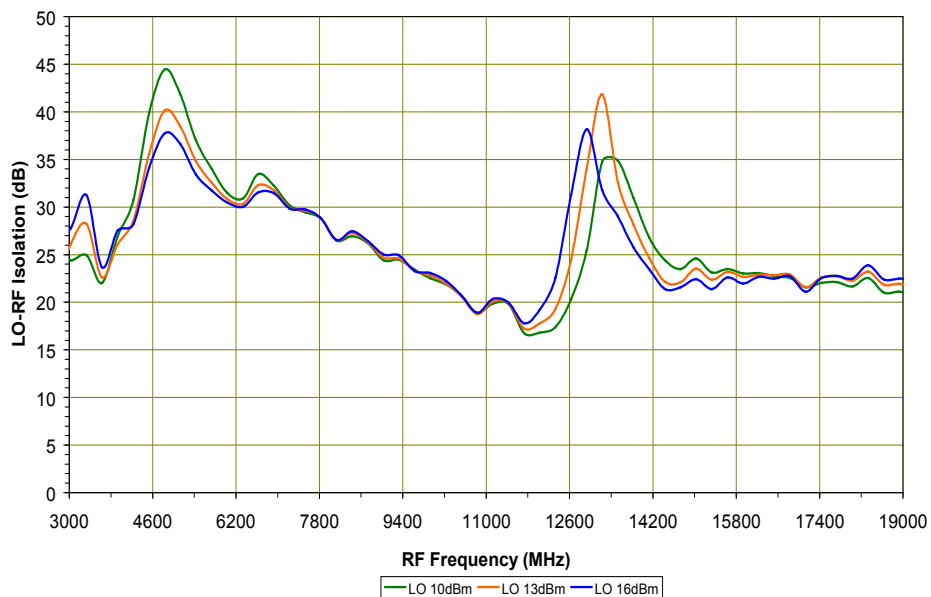

PERFORMANCE PLOTS



Copyright © 2006 Synergy Microwave Corporation

201 McLean Boulevard • Paterson, New Jersey 07504 • Tel: (973) 881-8800 • Fax: (973) 881-8361

E-Mail: sales@synergymwave.com • World Wide Web: <http://www.synergymwave.com>