

NPN SILICON EPITAXIAL TRANSISTOR
SUPER MINI MOLD**DESCRIPTION**

The 2SC4571 is a low supply voltage transistor designed for UHF OSC/MIX.

It is suitable for a high density surface mount assembly since the transistor has been applied super mini mold package.

FEATURES

- High f_T : 5.0 GHz TYP. (@ $V_{CE} = 5$ V, $I_C = 5$ mA, $f = 1$ GHz)
- Low C_{ob} : 0.9 pF TYP. (@ $V_{CB} = 5$ V, $I_E = 0$, $f = 1$ MHz)
- Super Mini Mold Package. (EIAJ : SC-70)


ORDERING INFORMATION

PART NUMBER	QUANTITY	PACKING STYLE
2SC4571-T1	3 kpcs./Reel	Embossed tape 8 mm wide. Pin 3 (Collector) face to perforation side of the tape.
2SC4571-T2	3 kpcs./Reel	Embossed tape 8 mm wide. Pin 1 (Emitter), Pin 2 (Base) face to perforation side of the tape.

* Please contact with responsible NEC person, if you require evaluation sample. Unit sample lot. quantity shall be 50 pcs. (Part No.: 2SC4571)

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	12	V
Emitter to Base Voltage	V_{EBO}	3	V
Collector Current	I_C	60	mA
Total Power Dissipation	P_T	120	mW
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature	T_{stg}	-55 to +125	$^\circ\text{C}$

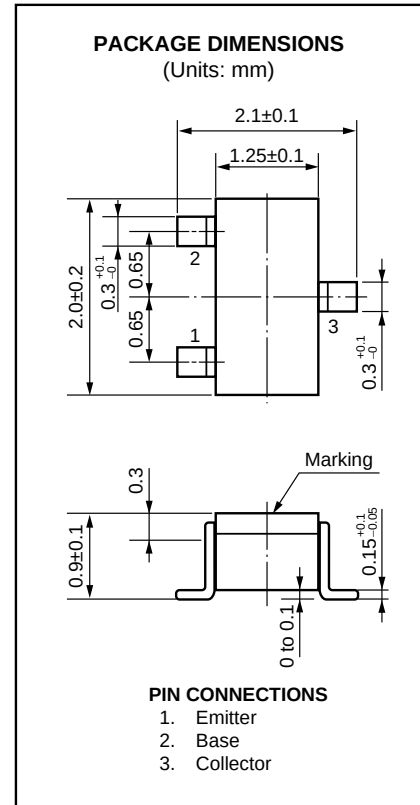

ELECTRICAL CHARACTERISTICS (T_A = 25 °C)







CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I _{CBO}			0.1	μA	V _{CB} = 15 V, I _E = 0
Emitter Cutoff Current	I _{EBO}			0.1	μA	V _{EB} = 1 V, I _C = 0
Collector Saturation Voltage	V _{CE(sat)}			0.5	V	h _{FE} = 10, I _C = 5 mA
DC Current Gain	h _{FE}	40	100	200		V _{CE} = 5 V, I _C = 5 mA *1
Gain Bandwidth Product	f _T		5.0		GHz	V _{CE} = 5 V, I _C = 5 mA
Output Capacitance	C _{ob}		0.9	1.2	pF	V _{CB} = 3 V, I _E = 0, f = 1 MHz
Insertion Power Gain	S _{21e} ²	5.0			dB	V _{CE} = 5 V, I _C = 5 mA, f = 1 GHz



*1 Pulse: Measurement PW ≤ 350 μs, Duty Cycle ≤ 2 %

h_{FE} Classification

Rank	T75	T76	T77
Marking	T75	T76	T77
h _{FE}	40 to 80	60 to 120	100 to 200

TYPICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$)

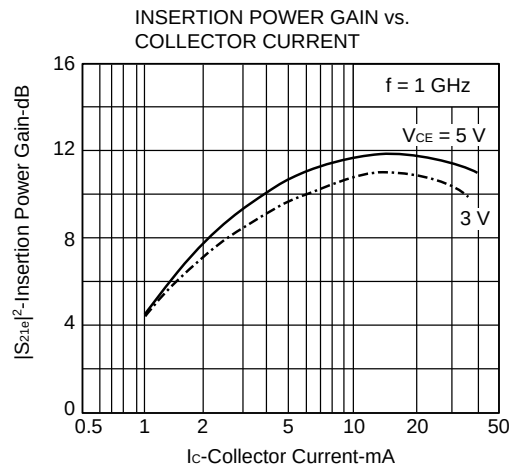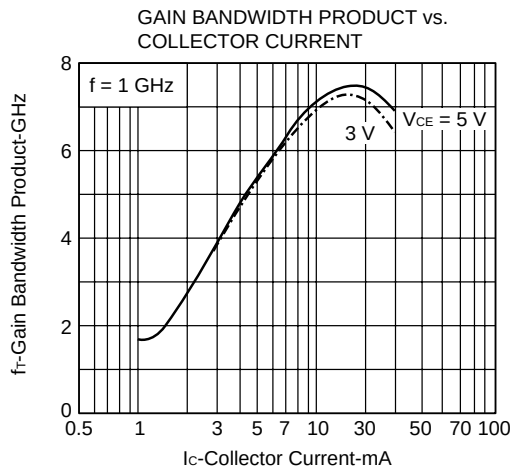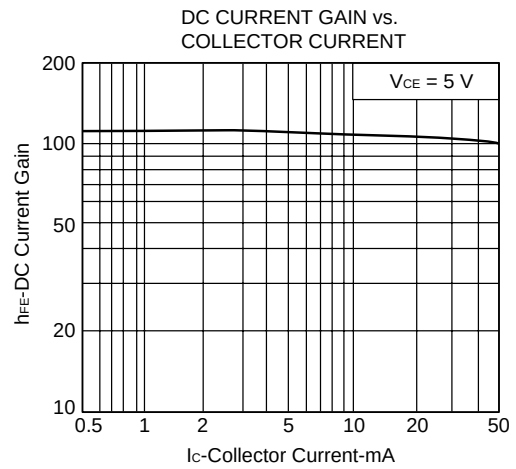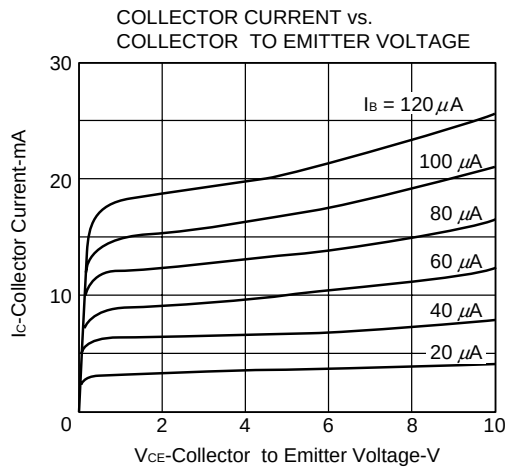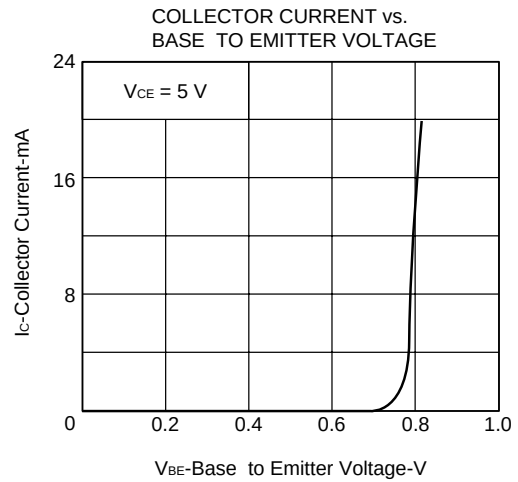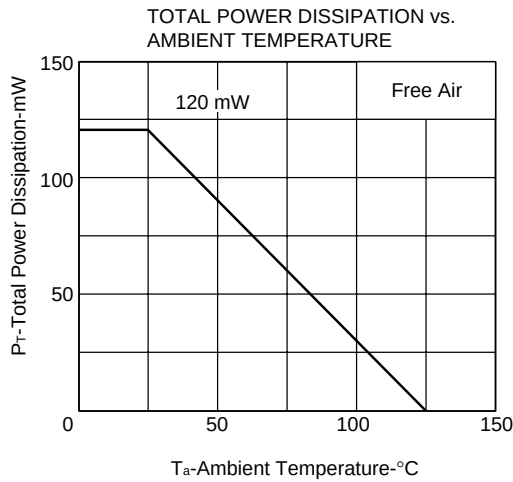

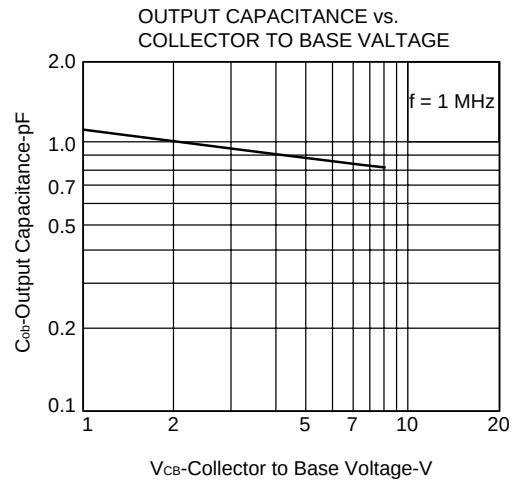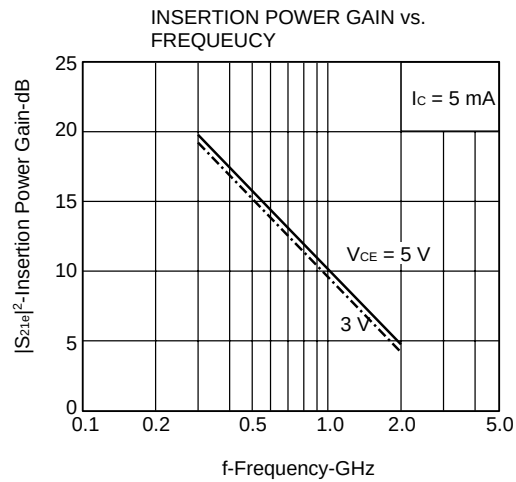

S-PARAMETER

($V_{CE} = 5\text{ V}$, $I_C = 5\text{ mA}$, $Z_O = 50\ \Omega$)

FREQUENCY		S ₁₁		S ₂₁		S ₁₂		S ₂₂	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00	.874	-24.2	8.628	152.9	.032	71.8	.910	-18.4	
200.00	.752	-49.1	8.089	135.3	.054	61.2	.763	-30.3	
300.00	.625	-70.9	7.278	121.4	.068	55.5	.643	-36.7	
400.00	.523	-89.3	6.406	110.0	.079	52.9	.560	-40.1	
500.00	.444	-105.3	5.617	101.1	.088	52.1	.502	-42.3	
600.00	.396	-117.4	4.890	94.1	.097	51.8	.462	-43.8	
700.00	.359	-129.0	4.345	88.0	.105	51.9	.434	-45.2	
800.00	.336	-138.5	3.893	82.9	.114	52.0	.414	-46.6	
900.00	.318	-147.3	3.529	78.3	.122	52.4	.398	-47.9	
1000.00	.307	-155.3	3.221	74.0	.131	52.3	.385	-49.5	
1100.00	.299	-162.8	2.959	70.1	.140	52.2	.376	-51.0	
1200.00	.294	-169.3	2.751	66.4	.149	52.0	.371	-52.7	
1300.00	.292	-175.3	2.565	62.9	.158	52.4	.364	-54.2	
1400.00	.292	179.1	2.407	59.5	.167	51.9	.359	-55.6	
1500.00	.293	173.6	2.269	56.4	.177	51.3	.356	-57.3	
1600.00	.296	168.8	2.155	53.3	.186	51.2	.350	-58.9	
1700.00	.298	164.4	2.045	50.2	.195	50.6	.346	-60.4	
1800.00	.300	160.2	1.950	47.4	.206	49.9	.342	-62.3	
1900.00	.302	156.1	1.873	44.6	.215	49.4	.337	-64.5	
2000.00	.310	151.8	1.793	41.6	.225	48.8	.327	-67.1	
2100.00	.314	148.3	1.726	38.9	.235	48.2	.322	-69.4	
2200.00	.318	144.7	1.662	36.3	.245	47.2	.317	-72.4	
2300.00	.313	141.3	1.609	33.7	.255	46.3	.312	-75.3	
2400.00	.328	138.2	1.556	31.2	.265	45.4	.307	-78.9	
2500.00	.335	135.1	1.513	28.7	.274	44.5	.304	-82.9	
2600.00	.339	131.9	1.466	26.3	.284	43.4	.302	-87.1	
2700.00	.345	129.3	1.427	23.9	.294	42.5	.302	-91.0	
2800.00	.349	126.3	1.387	21.5	.304	41.5	.304	-94.8	
2900.00	.356	123.8	1.353	19.3	.315	40.4	.309	-98.9	
3000.00	.361	121.0	1.323	17.2	.323	39.4	.313	-102.4	

($V_{CE} = 5\text{ V}$, $I_C = 5\text{ mA}$, $Z_O = 50\ \Omega$)

FREQUENCY		S ₁₁		S ₂₁		S ₁₂		S ₂₂	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00	.923	-19.2	5.456	157.3	.034	75.1	.951	-13.6	
200.00	.844	-39.4	5.317	142.0	.060	63.0	.852	-24.1	
300.00	.746	-57.9	5.047	128.9	.078	55.7	.752	-31.3	
400.00	.660	-74.5	4.667	118.1	.091	51.5	.674	-35.8	
500.00	.575	-90.3	4.321	108.3	.101	48.3	.612	-39.0	
600.00	.516	-102.7	3.860	100.4	.108	46.4	.567	-41.5	
700.00	.461	-114.8	3.546	93.2	.115	45.7	.532	-43.6	
800.00	.423	-125.2	3.237	87.1	.122	45.3	.507	-45.4	
900.00	.396	-134.9	2.979	81.6	.128	44.8	.486	-47.1	
1000.00	.375	-143.6	2.749	76.6	.134	45.2	.471	-48.8	
1100.00	.362	-151.4	2.547	72.4	.142	45.3	.461	-50.5	
1200.00	.349	-158.8	2.380	68.0	.147	45.4	.452	-52.3	
1300.00	.343	-165.2	2.222	64.2	.154	45.9	.445	-54.0	
1400.00	.339	-171.7	2.101	60.4	.161	46.1	.438	-55.6	
1500.00	.336	-177.6	1.984	57.0	.169	46.4	.433	-57.3	
1600.00	.337	177.0	1.887	53.5	.177	46.5	.428	-59.0	
1700.00	.338	172.0	1.798	50.3	.184	46.6	.423	-61.1	
1800.00	.337	167.1	1.719	47.2	.193	46.7	.419	-63.1	
1900.00	.339	162.7	1.648	44.0	.201	46.5	.411	-65.2	
2000.00	.345	158.0	1.579	41.2	.211	46.3	.405	-68.0	
2100.00	.348	153.8	1.524	38.4	.219	46.0	.399	-70.4	
2200.00	.351	150.0	1.470	35.4	.229	45.6	.394	-73.4	
2300.00	.357	146.1	1.424	32.8	.238	45.3	.389	-76.4	
2400.00	.361	142.5	1.376	30.1	.247	44.6	.386	-80.0	
2500.00	.367	139.2	1.338	27.5	.257	44.0	.383	-83.8	
2600.00	.371	135.8	1.296	25.0	.266	43.5	.381	-88.0	
2700.00	.376	132.6	1.263	22.5	.275	42.9	.380	-91.4	
2800.00	.381	129.3	1.231	20.1	.287	42.1	.385	-95.4	
2900.00	.387	126.4	1.199	17.9	.297	41.4	.389	-99.2	
3000.00	.392	123.4	1.169	15.7	.306	40.4	.391	-103.0	

S-PARAMETER

(V_{CE} = 5 V, I_c = 1 mA, Z_o = 50 Ω)

FREQUENCY	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	.977	-14.2	1.896	165.0	.036	79.9	.988	-7.4
200.00	.944	-28.0	1.948	150.9	.069	69.5	.954	-14.2
300.00	.897	-41.9	1.954	139.2	.095	61.1	.911	-20.1
400.00	.848	-54.9	1.907	128.9	.116	53.7	.867	-25.2
500.00	.793	-68.0	1.878	119.8	.131	47.9	.820	-29.5
600.00	.744	-79.1	1.745	110.9	.143	42.2	.786	-33.4
700.00	.689	-90.6	1.697	102.7	.151	38.6	.752	-36.6
800.00	.646	-101.4	1.630	95.2	.155	35.1	.726	-39.6
900.00	.605	-111.3	1.579	88.5	.157	32.9	.702	-42.3
1000.00	.570	-121.0	1.519	82.1	.161	31.1	.684	-44.8
1100.00	.542	-130.0	1.455	76.5	.162	30.0	.669	-47.4
1200.00	.516	-138.2	1.393	71.2	.162	29.1	.661	-49.9
1300.00	.500	-145.7	1.325	66.3	.161	29.0	.650	-52.2
1400.00	.489	-153.1	1.270	61.8	.163	29.4	.643	-54.3
1500.00	.478	-160.1	1.213	57.5	.163	29.3	.637	-56.7
1600.00	.470	-166.6	1.168	53.5	.163	30.5	.631	-59.0
1700.00	.465	-172.8	1.128	49.5	.164	31.6	.624	-61.6
1800.00	.461	-178.5	1.086	45.9	.166	33.5	.621	-64.0
1900.00	.458	175.7	1.047	42.5	.169	34.4	.614	-66.7
2000.00	.458	170.1	1.012	39.2	.173	36.3	.608	-69.6
2100.00	.460	165.0	.980	36.1	.178	38.0	.603	-72.6
2200.00	.460	160.3	.946	33.1	.183	39.5	.599	-76.0
2300.00	.462	155.6	.922	30.4	.191	40.9	.593	-79.3
2400.00	.465	151.1	.889	27.7	.198	42.3	.591	-83.1
2500.00	.469	146.7	.867	25.3	.206	43.0	.588	-87.2
2600.00	.472	142.5	.843	22.8	.216	44.2	.588	-91.3
2700.00	.476	138.7	.820	20.5	.227	44.8	.586	-95.3
2800.00	.479	134.7	.799	18.5	.239	45.2	.589	-99.4
2900.00	.482	130.9	.779	16.5	.251	45.2	.591	-103.3
3000.00	.487	127.2	.761	14.8	.263	45.4	.593	-107.1

(V_{CE} = 3 V, I_c = 5 mA, Z_o = 50 Ω)

FREQUENCY	S ₁₁		S ₂₁		S ₁₂		S ₂₂	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
100.00	.871	-26.4	8.583	152.2	.037	69.9	.894	-21.2
200.00	.735	-53.1	7.998	133.6	.061	59.2	.730	-35.0
300.00	.608	-76.6	7.129	119.2	.076	53.4	.601	-42.3
400.00	.512	-96.0	6.208	107.9	.087	51.2	.515	-46.6
500.00	.441	-112.5	5.402	99.1	.096	49.9	.452	-49.3
600.00	.400	-125.0	4.681	92.2	.105	49.8	.410	-51.2
700.00	.367	-136.5	4.139	86.3	.116	50.1	.379	-52.9
800.00	.349	-146.0	3.707	81.3	.124	50.1	.358	-54.5
900.00	.338	-154.7	3.362	76.6	.133	50.5	.341	-55.7
1000.00	.328	-162.1	3.061	72.4	.142	50.5	.327	-57.7
1100.00	.324	-168.9	2.817	68.5	.153	50.5	.317	-59.3
1200.00	.319	-175.4	2.611	64.8	.162	50.1	.311	-61.0
1300.00	.319	179.0	2.436	61.4	.172	49.9	.305	-62.6
1400.00	.321	173.8	2.296	57.9	.181	49.7	.300	-64.3
1500.00	.322	168.7	2.159	54.7	.192	49.5	.294	-65.8
1600.00	.324	164.3	2.048	51.6	.201	48.8	.289	-67.7
1700.00	.328	160.2	1.950	48.5	.212	48.2	.284	-69.3
1800.00	.329	155.9	1.858	45.8	.221	47.6	.280	-71.4
1900.00	.333	152.0	1.777	42.7	.234	46.9	.272	-73.9
2000.00	.339	148.2	1.716	40.0	.242	46.1	.265	-77.0
2100.00	.343	144.7	1.647	37.4	.253	45.2	.258	-79.9
2200.00	.348	141.6	1.587	34.7	.264	44.1	.254	-83.4
2300.00	.353	138.2	1.537	32.2	.274	43.3	.249	-86.6
2400.00	.357	135.1	1.487	29.6	.284	42.3	.246	-90.8
2500.00	.364	132.3	1.446	27.1	.293	41.0	.243	-95.6
2600.00	.368	129.3	1.403	24.8	.305	40.4	.244	-100.0
2700.00	.373	126.5	1.366	22.4	.313	39.2	.245	-104.3
2800.00	.377	123.8	1.330	19.9	.324	38.1	.250	-109.0
2900.00	.383	121.1	1.298	17.9	.334	36.9	.255	-112.8
3000.00	.388	118.3	1.268	15.7	.344	35.8	.260	-116.4

S-PARAMETER(V_{CE} = 3 V, I_C = 3 mA, Z_O = 50 Ω)

FREQUENCY		S ₁₁		S ₂₁		S ₁₂		S ₂₂	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00	.912	-21.6	5.515	157.0	.039	74.4	.941	-15.6	
200.00	.834	-42.0	5.289	140.5	.068	61.3	.829	-27.6	
300.00	.733	-61.8	4.989	127.0	.088	54.0	.720	-35.4	
400.00	.645	-79.5	4.582	115.9	.102	48.7	.634	-40.9	
500.00	.563	-95.8	4.216	106.2	.111	46.0	.567	-44.5	
600.00	.508	-108.6	3.750	98.3	.119	44.2	.520	-47.3	
700.00	.459	-121.1	3.422	91.1	.126	43.4	.483	-49.6	
800.00	.426	-131.5	3.114	85.1	.134	43.0	.457	-51.6	
900.00	.403	-140.9	2.860	79.8	.140	42.7	.435	-53.4	
1000.00	.387	-149.5	2.628	74.7	.147	43.0	.418	-55.3	
1100.00	.374	-157.2	2.441	70.4	.155	43.2	.408	-57.2	
1200.00	.365	-164.3	2.273	66.1	.161	43.0	.399	-59.1	
1300.00	.360	-170.7	2.132	62.3	.169	43.3	.390	-60.8	
1400.00	.359	-176.5	2.007	58.7	.176	43.6	.383	-62.6	
1500.00	.358	177.6	1.899	55.2	.184	43.7	.378	-64.5	
1600.00	.359	172.6	1.801	51.8	.192	43.8	.371	-66.4	
1700.00	.360	167.7	1.720	48.3	.200	43.6	.366	-68.5	
1800.00	.361	163.3	1.648	45.3	.209	43.6	.361	-70.6	
1900.00	.363	158.7	1.582	42.3	.218	43.4	.355	-72.9	
2000.00	.369	154.5	1.513	39.2	.227	43.1	.347	-76.1	
2100.00	.372	150.4	1.462	36.5	.236	42.9	.340	-78.8	
2200.00	.375	146.9	1.409	33.7	.246	42.4	.336	-82.3	
2300.00	.380	143.2	1.366	31.0	.256	41.8	.331	-85.3	
2400.00	.385	139.8	1.323	28.4	.265	41.4	.328	-89.4	
2500.00	.391	136.5	1.287	25.8	.275	40.3	.326	-93.8	
2600.00	.394	133.3	1.250	23.4	.284	39.8	.326	-98.0	
2700.00	.401	130.2	1.215	20.9	.295	39.0	.327	-102.2	
2800.00	.405	127.0	1.183	18.5	.305	38.2	.332	-106.2	
2900.00	.410	124.2	1.156	16.3	.314	37.4	.337	-110.2	
3000.00	.415	121.3	1.130	14.2	.324	36.5	.342	-113.8	

(V_{CE} = 3 V, I_C = 1 mA, Z_O = 50 Ω)

FREQUENCY		S ₁₁		S ₂₁		S ₁₂		S ₂₂	
MHz	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	
100.00	.970	-14.8	1.932	163.6	.042	78.2	.984	-8.3	
200.00	.940	-29.4	1.944	149.6	.079	68.4	.945	-16.0	
300.00	.890	-43.9	1.949	137.4	.109	59.0	.895	-22.6	
400.00	.839	-57.5	1.894	127.0	.132	51.8	.846	-28.2	
500.00	.782	-71.0	1.854	117.6	.149	45.3	.795	-32.8	
600.00	.734	-82.5	1.723	108.5	.161	40.1	.757	-36.9	
700.00	.680	-94.1	1.674	100.1	.168	36.1	.720	-40.5	
800.00	.638	-105.2	1.606	92.6	.174	32.7	.691	-43.7	
900.00	.598	-115.4	1.548	85.8	.177	30.0	.666	-46.5	
1000.00	.565	-125.0	1.486	79.4	.179	28.5	.646	-49.3	
1100.00	.541	-133.7	1.422	73.9	.180	27.2	.633	-51.8	
1200.00	.518	-142.1	1.354	68.5	.179	26.0	.621	-54.5	
1300.00	.504	-149.6	1.287	63.6	.180	25.9	.610	-56.9	
1400.00	.494	-156.8	1.235	59.0	.180	26.0	.603	-59.3	
1500.00	.485	-163.5	1.183	54.8	.179	26.2	.596	-61.8	
1600.00	.478	-169.9	1.136	50.8	.180	27.0	.590	-64.3	
1700.00	.476	-175.8	1.098	46.9	.181	27.5	.584	-66.9	
1800.00	.472	-178.5	1.054	43.4	.182	29.1	.578	-69.6	
1900.00	.470	-173.0	1.019	39.9	.184	30.4	.573	-72.3	
2000.00	.472	-167.6	.987	36.6	.189	31.9	.566	-75.6	
2100.00	.473	-162.6	.952	33.8	.193	33.5	.560	-78.9	
2200.00	.474	-158.0	.922	30.8	.198	34.5	.556	-82.5	
2300.00	.476	-153.5	.897	28.0	.205	36.1	.551	-86.1	
2400.00	.480	-149.2	.866	25.4	.212	37.3	.548	-90.2	
2500.00	.484	-144.9	.846	23.0	.220	38.3	.546	-94.5	
2600.00	.488	-141.0	.823	20.7	.230	39.3	.547	-98.9	
2700.00	.491	-137.0	.801	18.5	.240	39.9	.546	-103.1	
2800.00	.495	-133.2	.781	16.4	.252	4.02	.550	-107.3	
2900.00	.498	-129.7	.763	14.6	.263	4.04	.553	-111.3	
3000.00	.501	-125.9	.745	12.9	.275	4.05	.555	-115.2	

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.

NEC devices are classified into the following three quality grades:

"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.

Anti-radioactive design is not implemented in this product.