

ULTRA FAST RECTIFIER

VOLTAGE RANGE: 50 --- 600V

CURRENT: 8.0A


FEATURES

- Low cost
- Diffused junction
- Glass passivated junction
- Low forward voltage drop
- High current capability
- Easily cleaned with Alcohol, Isopropanol and similar solvents
- The plastic material carries U/L recognition 94V-0

MECHANICAL DATA

- Case: JEDEC TO-220AC
- Terminals: solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode
- Weight: 0.064 ounces, 1.81 gram
- Mounting position: Any

TO - 220AC

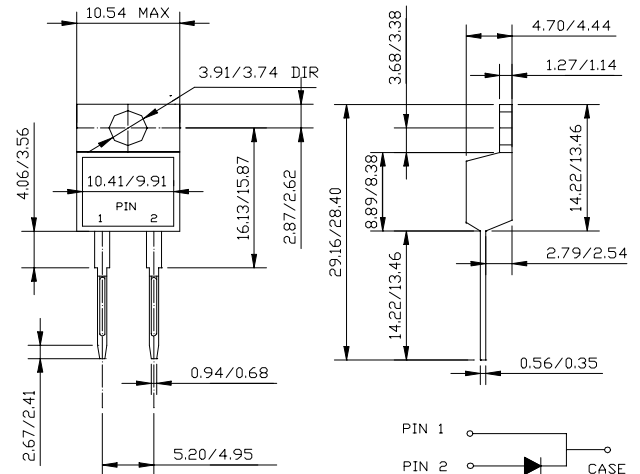

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		MUR 805	MUR 810	MUR 815	MUR 820	MUR 840	MUR 860	UNITS
Device marking code		U805	U810	U815	U820	U840	U860	
Maximum recurrent peak reverse voltage	V_{RRM}	50	100	150	200	400	600	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	280	420	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	400	600	V
Maximum average forward rectified current total device (rated V_R), $T_C=150$	$I_{(AV)}$	8.0						A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I_{FSM}	100						A
Maximum instantaneous forward voltage (Note1)	V_F		0.975 0.895			1.30 1.00	1.50 1.20	V
Maximum reverse current at rated DC blocking voltage	I_R		5.0 250			10 500		μA
Maximum reverse recovery time (Note2) (Note3)	t_{rr}		25 35			50 60		ns
Typical thermal resistance junction to case	$R_{\theta JC}$		3.0			2.0		/W
Operating junction temperature range	T_j	- 65 ---- + 175						
Storage temperature range	T_{STG}	- 65 ---- + 175						

NOTE:1. Pulse test: pulse width=300 μs , duty cycle 2.0%

2. Measured with $I_F=0.5A$, $I_R=1A$, $t_{rr}=0.25 A$.

3. Measured with $I_F=1.0A$, $di/dt=50A/\mu s$.

www.galaxycn.com

FIG.1 –TYPICAL FORWARD CHARACTERISTIC

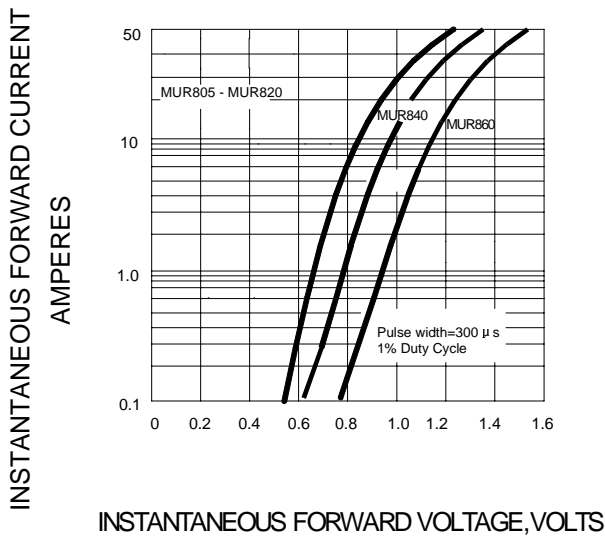


FIG.2 –TYPICAL REVERSE CHARACTERISTICS

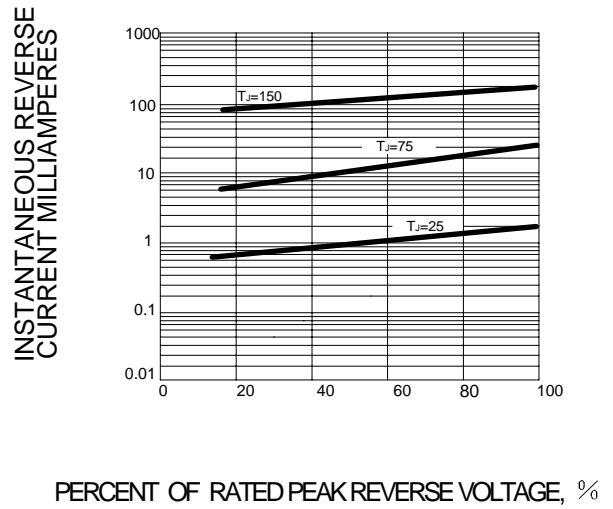


FIG.3 – PEAK FORWARD SURGE CURRENT

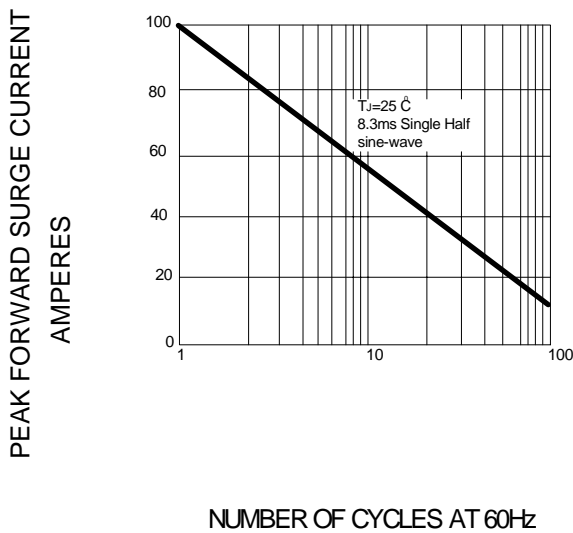


FIG.4 – FORWARD DERATING CURVE

