



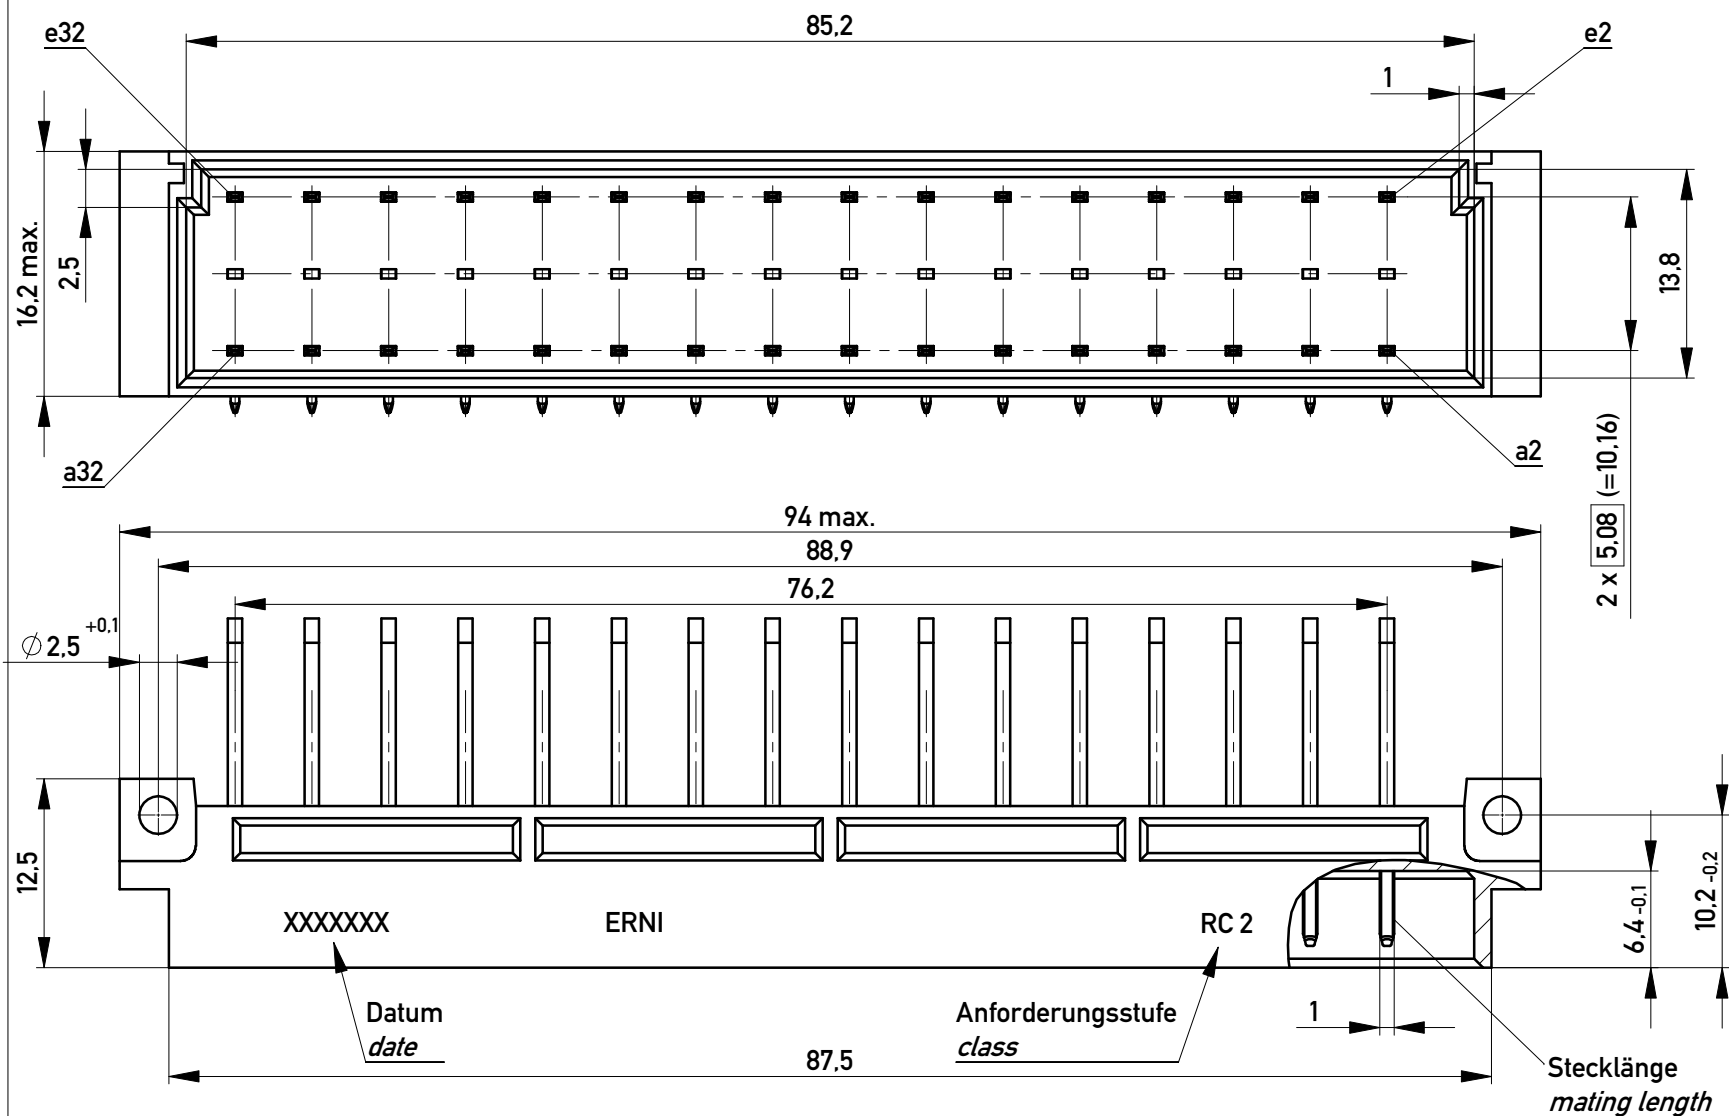


Stecklänge / mating length




E = early mate, late break / voreilend

S = standard


L = late mate, early break / nacheilend

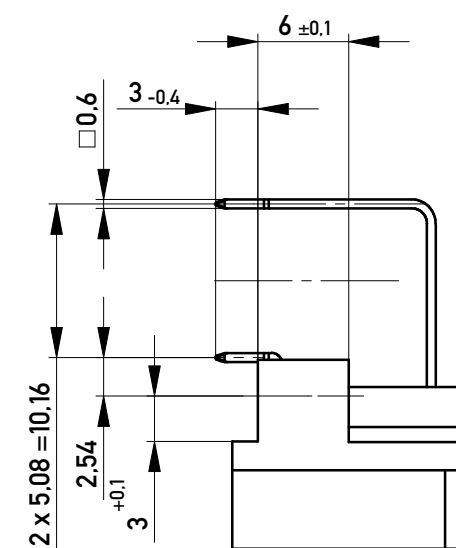

Bestückungsplan / contact layout

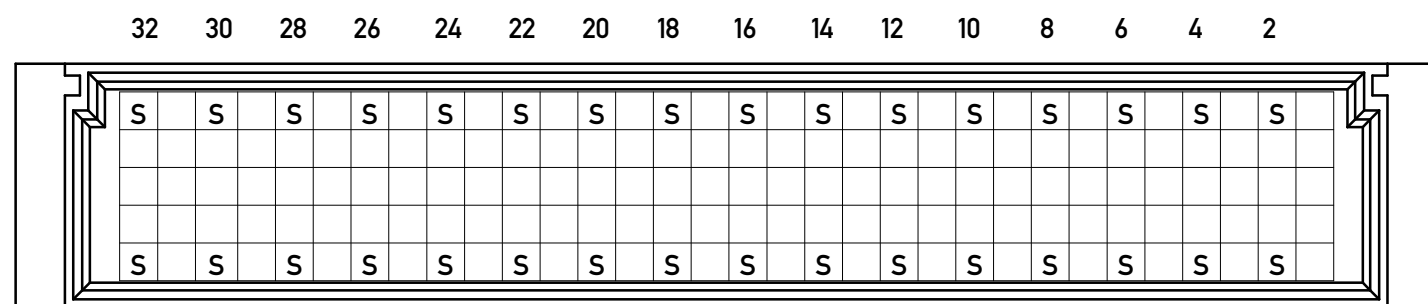

Leiterplatten-Lochbild / PCB drillhole pattern

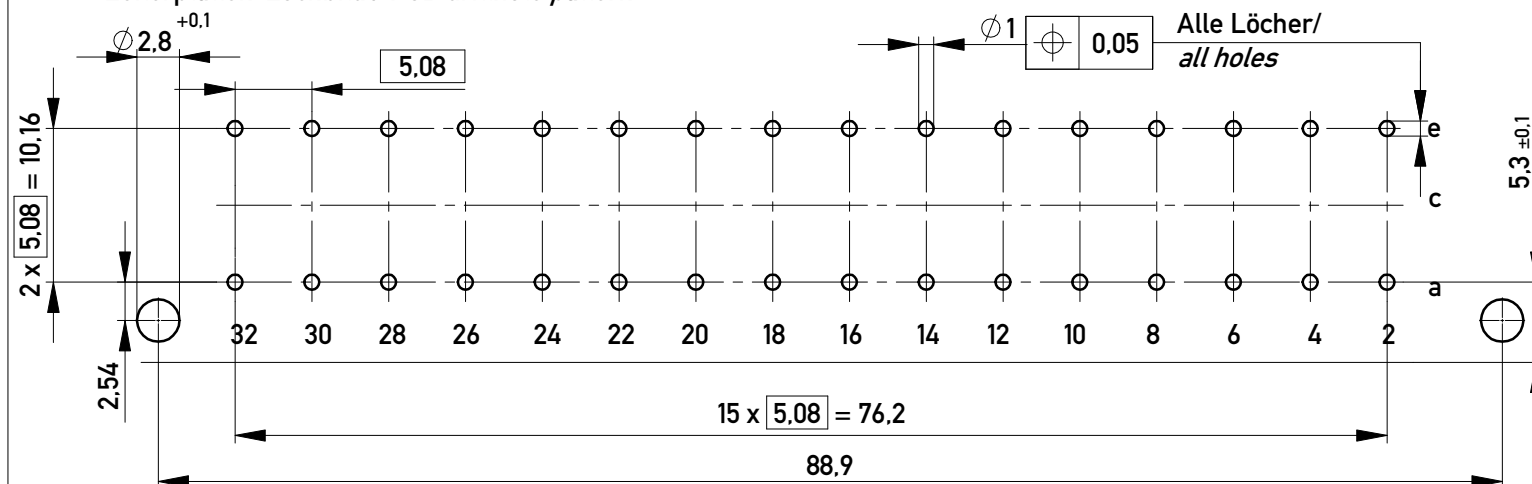

Steckseite AE / Anschlussseite AE / contact side AE / terminal Side AE

Lötanschluss 0,6 x 0,6 / solder terminal 0,6 x 0,6

Isolierwerkstoff / housing material : PBT GF 30

Bauart 4 / Type 4

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2= 400 mating cycles


Fehlende Maße und Angaben gemäss IEC 60603-2 / DIN EN 60603-2

Missing information and dimensions according to IEC 60603-2

Bedruckung siehe Zeichnung 294905

Marking see drawing 294905

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16046 to be observed.

Information:				Tolerances		 All Dimensions in mm	Scale	2:1			
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.				Subject to modification without prior notice. Drawing will not be updated.			Designation Messerleiste E32 Löt <i>Male Con. E32 Solder</i>				
Index				Date			www.ERNI.com		364903		I
									Class		STVE