


SHEET OF

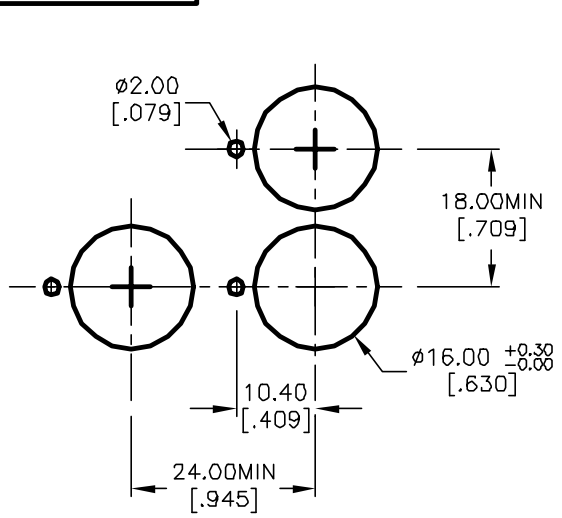


RECOMMENDED PANEL MOUNTING


SCALE 1:1

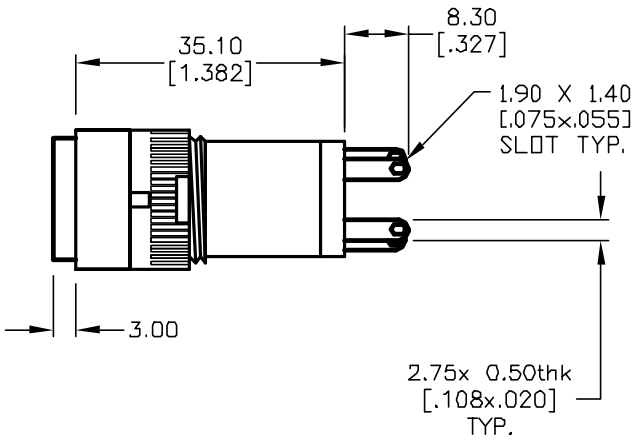




DPST
CIRCUIT DIAGRAM



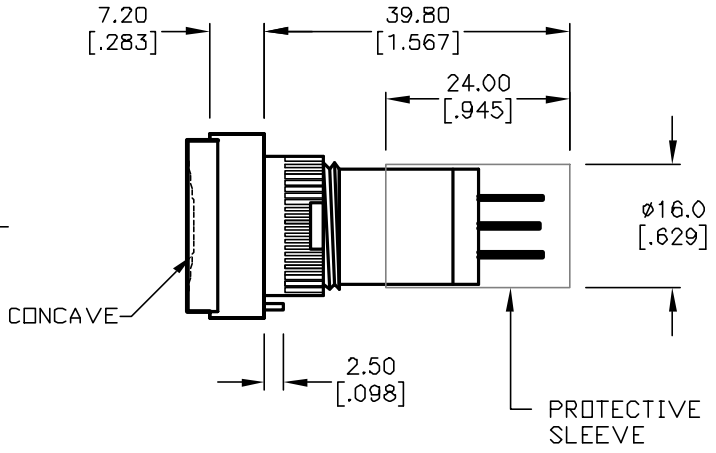



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATINGS: 5A@250V AC,
   8A@125V AC
4. CONTACT MATERIAL: COPPER ALLOY W/Gold Plating
5. TRAVEL: 3.0mm
6. MECHANICAL LIFE: >100,000 Cycles
7. ELECTRICAL LIFE: >50,000 Cycles
8. INSULATION RESISTANCE: >1000 mILLI-OHMS
9. OPERATING TEMP: -20°C to 55°C

PARTS LIST			
ITEM	QTY.	PART NO.	PART DESCRIPTION
1	1	F040501	P16 OA T1 2
2	1	F050205	50-002-05 (Transparent WHT lens)

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	12212	RELEASED FOR PRODUCTION	6/5/02	CB

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE: P16 OA T12 0 WHT (Momentary)
TRANSPARENT/CONCAVE LENS

SCALE	DATE	DR	DWG	REV
1:1	10/04/01	CB	XF0479P	A