
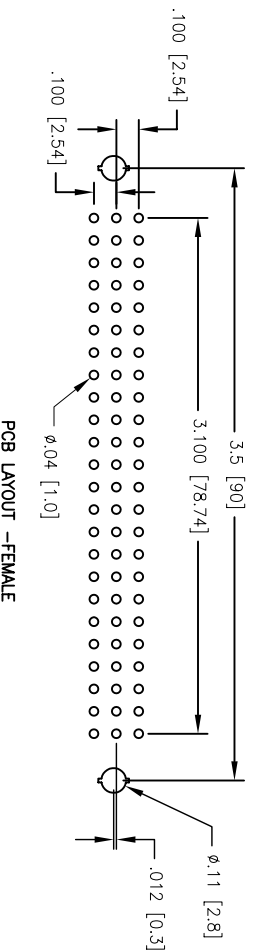


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/15/05	

APPROVED: _____ TITLE: _____
 DATE: _____

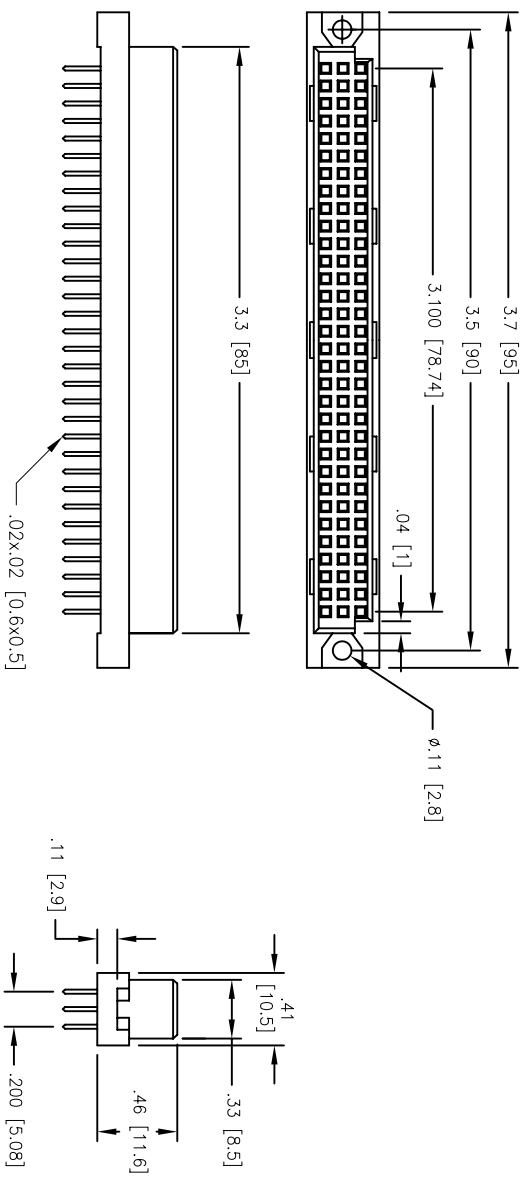

"X"	PLATING	CLASS
1	30 u" Gold	1
2	15 u" Gold	2
3	Gold Flash	3

SPECIFICATIONS:

Material:
 Insulator: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Beige
 Contacts: Brass
Plating:
 Gold over Nickel underplate on contact area, Tin over Copper underplate on solder tails.
 (See chart for thickness)

Electrical:
 Operating voltage: 500 VAC max
 Current rating: 2 Amps max
 Contact resistance: 30 mohms max
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -55C to +125C

Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235 for 5 sec.



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DIN 41612, 96P FEMALE STRAIGHT
 PCB MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED INCHES	
.X ± .10	Ø.X ± .015
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN SS	7/15/05
CHECKED	
APPROVED	

SIZE X	PART NO. DIN-96FS-L33-A1CX	REV. -
REF.	SCALE: NTS	SHEET 1 OF 1