

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual SCR/Diode Isolated Module
90 Amperes / Up to 1600 Volts

OUTLINE DRAWING

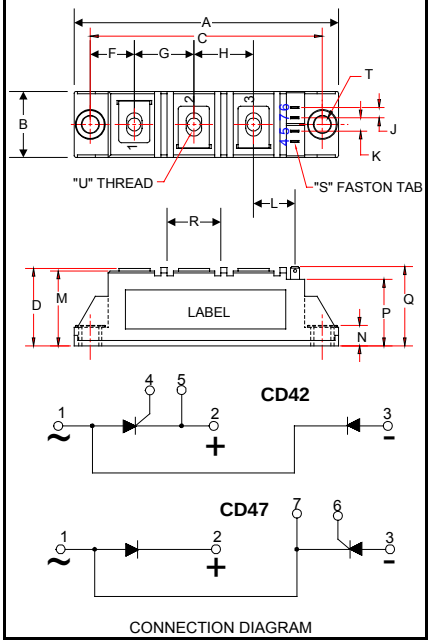

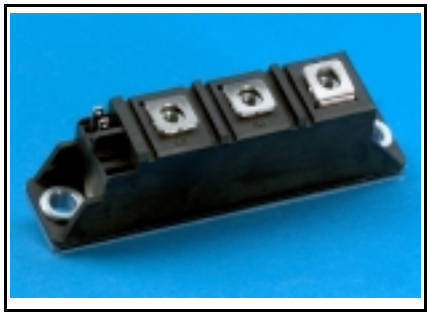

CD42__90A, CD47__90A
Dual SCR/Diode Isolated
POW-R-BLOK™ Module
90 Amperes / Up to 1600 Volts

Description:

Powerex SCR/Diode Modules are designed for use in applications requiring phase control and isolated packaging. The modules are isolated for easy mounting with other components on a common heatsink. *POW-R-BLOK™* has been tested and recognized by the Underwriters Laboratories.

Features:

Features:

- Electrically Isolated Heatsinking
- DBC Alumina (Al_2O_3) Insulator
- Copper Baseplate
- Low Thermal Impedance for Improved Current Capability
- UL Recognized (E78240)

Benefits:

- No Additional Insulation Components Required
- Easy Installation
- No Clamping Components Required
- Reduce Engineering Time

Applications:

- Bridge Circuits
- AC & DC Motor Drives
- Battery Supplies
- Power Supplies
- Large IGBT Circuit Front Ends
- Lighting Control
- Heat & Temperature Control
- Welders

CD42, CD47 Outline Dimensions

Dimension	Inches	Millimeters
A	3.62	92
B	0.83	21
C	3.15	80
D	1.18	30
F	0.59	15
G	0.79	20
H	0.79	20
J	0.16	4
K	0.23	5.8
L	0.61	15.5
M	1.14	29
N	0.25	6.3
P	0.94	24
Q	1.18	30
R	0.71	18
S	0.11 x .03	2.8 x 0.8
T	0.25	6.3
U	M5	M5

Note: Dimensions are for reference only.

Ordering Information:

Select the complete nine digit module part number from the table below. Example: CD421690A is a 1600Volt, 90 Ampere Dual SCR/Diode Isolated *POW-R-BLOK™* Module

Type	Voltage Volts (x100)	Current Amperes (x 1)
CD42	08	90
CD47	12	
	16	

Revision Date: 01/26/2002

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual SCR/Diode Isolated Module
90 Amperes / Up to 1600 Volts

Absolute Maximum Ratings

Characteristics	Conditions	Symbol		Units
Repetitive Peak Forward and Reverse Blocking Voltage		V_{DRM} & V_{RRM}	up to 1600	V
Non-Repetitive Peak Reverse Blocking Voltage (t < 5 msec)		V_{RSM}	V_{RRM} + 100	V
RMS Forward Current	180° Conduction, T_C=87°C	$I_{T(RMS)}$	140	A
	180° Conduction, T_C=87°C (AC Switch)	$I_{T(RMS)}$	200	A
Average Forward Current	180° Conduction, T_C=87°C	$I_{T(AV)}$	90	A
Peak One Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, T_j=125°C	I_{TSM}	1570	A
	60 Hz, No V_{RRM} reapplied, T_j=125°C	I_{TSM}	1870	A
	60 Hz, No V_{RRM} reapplied, T_j=25°C	I_{TSM}	2100	A
	50 Hz, 100% V_{RRM} reapplied, T_j=125°C	I_{TSM}	1500	A
	50 Hz, No V_{RRM} reapplied, T_j=125°C	I_{TSM}	1785	A
	50 Hz, No V_{RRM} reapplied, T_j=25°C	I_{TSM}	2000	A
Peak Three Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, T_j=125°C	I_{TSM}	1210	A
	50 Hz, 100% V_{RRM} reapplied, T_j=125°C	I_{TSM}	1155	A
Peak Ten Cycle Surge Current, Non-Repetitive	60 Hz, 100% V_{RRM} reapplied, T_j=125°C	I_{TSM}	960	A
	50 Hz, 100% V_{RRM} reapplied, T_j=125°C	I_{TSM}	940	A
I^2t for Fusing for One Cycle, 8.3 milliseconds	8.3 ms, 100% V_{RRM} reapplied, T_j=125°C	I^2t	10,270	A^2 sec
	8.3 ms, No V_{RRM} reapplied, T_j=125°C	I^2t	14,520	A^2 sec
	8.3 ms, No V_{RRM} reapplied, T_j=25°C	I^2t	18,300	A^2 sec
	10 ms, 100% V_{RRM} reapplied, T_j=125°C	I^2t	11,250	A^2 sec
	10 ms, No V_{RRM} reapplied, T_j=125°C	I^2t	15,910	A^2 sec
	10 ms, No V_{RRM} reapplied, T_j=25°C	I^2t	20,000	A^2 sec
Maximum Rate-of-Rise of On-State Current, (Non-Repetitive)	T_j=25°C, I_G=0.5 A, V_D=0.67 $V_{DRM\ (Rated)}$, I_{TM}=300A , T_r < 0.5µs, t_p > 6µs	di/dt	150	A/µs
Peak Gate Power Dissipation	T_p < 5 ms, T_j = 125°C	P_{GM}	12	W
Average Gate Power Dissipation	F = 50 Hz, T_j = 125°C	$P_{G(AV)}$	3	W
Peak Forward Gate Current	T_p < 5 ms, T_j = 125°C	I_{GFM}	3	A
Peak Reverse Gate Voltage	T_p < 5 ms, T_j = 125°C	V_{GRM}	10	V
Operating Temperature		T_J	-40 to +125	°C
Storage Temperature		T_{stg}	-40 to +125	°C
Max. Mounting Torque, M5 Mounting Screw on Terminals			25 3	in.-Lb. Nm
Max. Mounting Torque, Module to Heatsink			44 5	in.-Lb. Nm
Module Weight, Typical			110 3.88	g oz.
V Isolation @ 25C	50 – 60 Hz, 1 minute	V_{rms}	2500	V
Circuit to base, all terminals shorted together	50 – 60 Hz, 1 second	V_{rms}	3500	V

Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual SCR/Diode Isolated Module
90 Amperes / Up to 1600 Volts

Electrical Characteristics, T_J=25°C unless otherwise specified

Characteristics	Symbol	Test Conditions	Min.	Max.	Units
Repetitive Peak Forward Leakage Current	I_{DRM}	Up to 1600V, T_J=125°C		15	mA
Repetitive Peak Reverse Leakage Current	I_{RRM}	Up to 1600V, T_J=125°C		15	mA
Peak On-State Voltage	V_{TM} / V_{FM}	I_{TM} / I_{FM} =300A		1.58	V
Threshold Voltage, Low-level	$V_{(TO)1}$	T_J = 125°C, I = 16.7% x $\pi I_{T(AV)}$ to $\pi I_{T(AV)}$		0.80	V
Slope Resistance, Low-level	r_{T1}			2.40	mΩ
Threshold Voltage, High-level	$V_{(TO)2}$	T_J = 125°C, I = $\pi I_{T(AV)}$ to I_{TSM}		0.85	V
Slope Resistance, High-level	r_{T2}			2.25	mΩ
V_{TM} Coefficients, Full Range		T_J = 125°C, I = 15% x $I_{T(AV)}$ to I_{TSM}	A =	0.7160	
			B =	2.17E-02	
		V_{TM} = A+ B Ln I +C I + D Sqrt I	C =	2.20E-03	
			D =	1.58E-03	
Minimum dV/dt	dV/dt	Linear to 2/3 V_{DRM} T_j=125°C, Gate Open Circuit	500		V/µs
Turn-Off Time (Typical)	t_{off}	T_J = 25°C, I_T = 2A V_r = 50V, -dI/dt=10 A/µs Re-Applied dV/dt = 200 V/µs, Linear to 900 V	40 - 100	(Typical)	µs
Gate Trigger Current	I_{GT}	T_j= -40°C, V_D=6V, Resistive Load		270	mA
		T_j= 25°C, V_D=6V, Resistive Load		150	mA
		T_j=125°C, V_D=6V, Resistive Load		80	mA
Gate Trigger Voltage	V_{GT}	T_j= -40°C, V_D=6V, Resistive Load		4.0	Volts
		T_j= 25°C, V_D=6V, Resistive Load		2.5	Volts
		T_j=125°C, V_D=6V, Resistive Load		1.7	Volts
Non-Triggering Gate Voltage	V_{GDM}	T_j=125°C, V_D=V_{DRM}		0.25	Volts
Non-Triggering Gate Current	I_{GDM}	T_j=125°C, V_D=V_{DRM}		6	mA
Holding Current	I_H	V_D=6V, Resistive Load, Gate Open		200	mA
Latching Current	I_L	V_D=6V, Resistive Load		400	mA


Thermal Characteristics

Characteristics	Symbol				Max.	Units
Thermal Resistance, Junction to Case	$R_{ΘJ-C}$	Per Module, both conducting			0.135	°C/W
DC Operation		Per Junction, both conducting			0.270	°C/W
Thermal Impedance Coefficients	$Z_{ΘJ-C}$	$Z_{ΘJ-C}$= K_1 (1-exp(-t/τ_1))	K_1 = 6.48 E-3	τ_1 = 5.80 E-4		
		+ K_2 (1-exp(-t/τ_2))	K_2 = 6.02 E-2	τ_2 = 1.70 E-2		
		+ K_3 (1-exp(-t/τ_3))	K_3 = 1.64 E-1	τ_3 = 9.54 E-2		
		+ K_4 (1-exp(-t/τ_4))	K_4 = 3.94 E-2	τ_4 = 3.53 E-1		
Thermal Resistance, Case to Sink Lubricated	$R_{ΘC-S}$	Per Module			0.1	°C/W


Powerex, Inc., Hillis Street, Youngwood, Pennsylvania 15697 (724) 925-7272

POW-R-BLOK™
Dual SCR/Diode Isolated Module
90 Amperes / Up to 1600 Volts


Maximum On-State Forward Voltage Drop
(Tj = 125 °C)

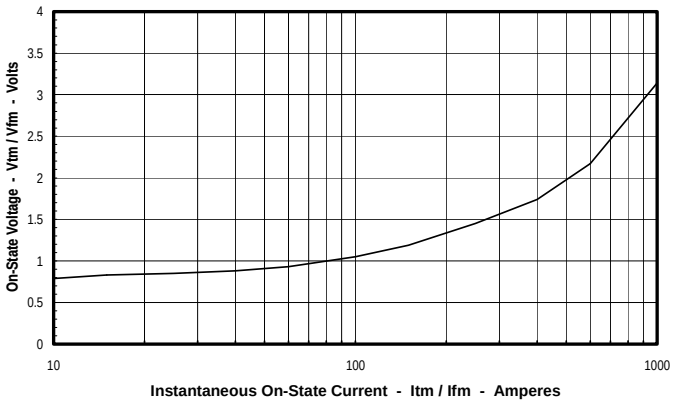


Maximum Transient Thermal Impedance
(Junction to Case)

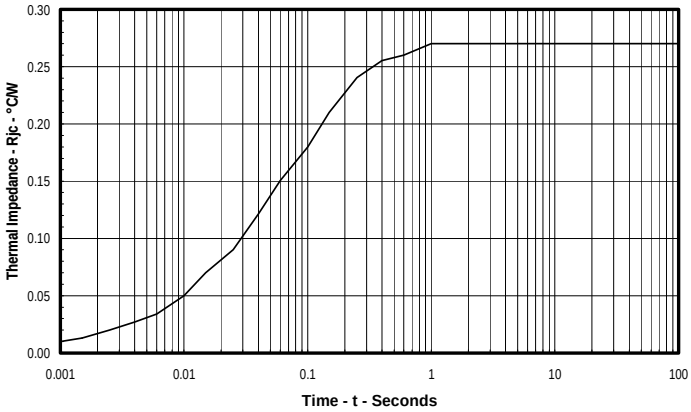


Maximum On-State Power Dissipation
(Sinusoidal Waveform)

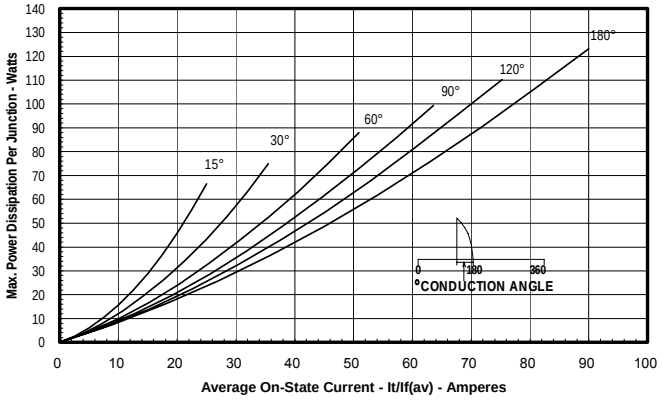


Maximum Allowable Case Temperature
(Sinusoidal Waveform)

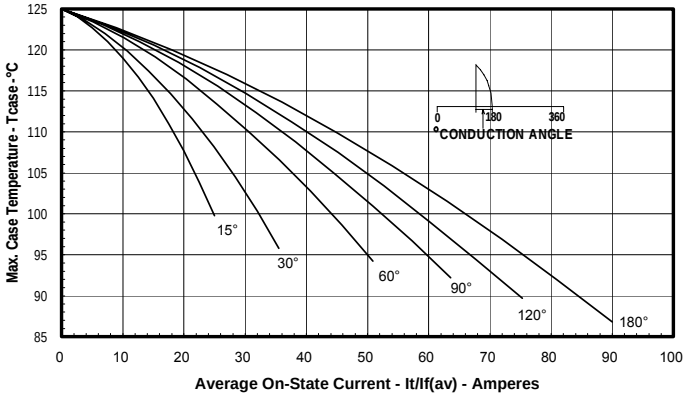

Maximum On-State Power Dissipation
(Rectangular Waveform)

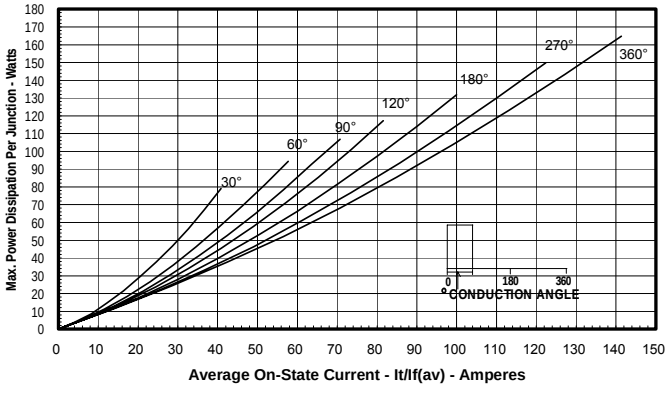

Maximum Allowable Case Temperature
(Rectangular Waveform)

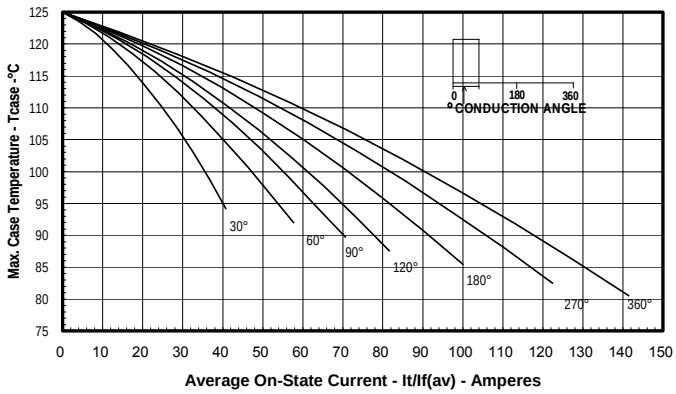

Revision Date: 01/26/2002