



1. Mechanical Dimensions:

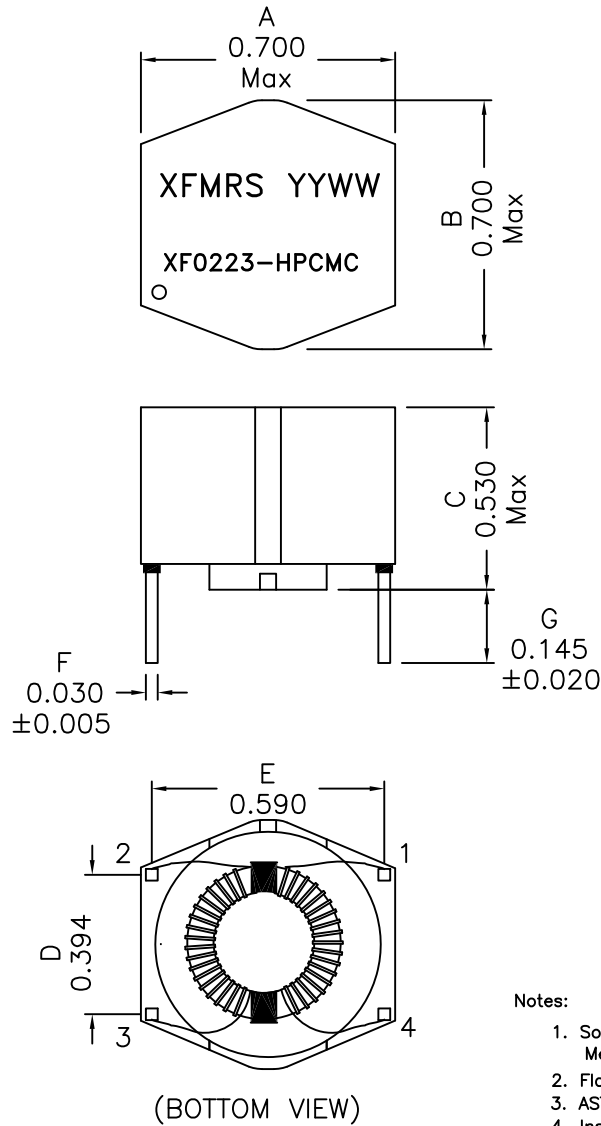

Notes:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C. UL file E151556
5. All listed parameters are to be within tolerance from -40°C to +85°C unless otherwise noted
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. SMD Lead Coplanarity: ±0.004"(0.102mm)
9. Moisture Sensitivity: Level 3
10. Electrical and mechanical specifications 100% tested
11. RoHS Compliant Component

2. Schematic:

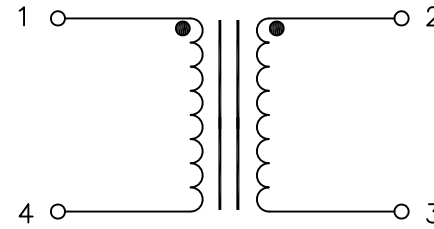

3. Electrical Specifications:@25°C

OCL: 22mH+50-30% @10KHz 0.1V Each Wdg.

Q: Pins 1-4 tbd Min @10KHz 0.1V

Leakage L: Pins 1-4 350uH Typ @100KHz, 0.1V (short 2-3)

DCR.: 1.90 Ohms Max Each Wdg.

Rated Current: 0.35Amps

DOC. REV A/1

XFMRS Inc. www.XFMRS.com	Title: Common Mode Choke		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xxx ±0.020 Dimensions in INCH	P/N: XF0223-HPCMC	REV. A
SHEET 1 OF 1	DWN.	Mei Chen	Aug-22-12
	CHK.	YK Liao	Aug-22-12
	APP.	BSJ	Aug-22-12

PROPRIETARY

Document is the property of XFMRS Group & is not allowed to be duplicated without authorization.