


SHEET 1 OF 1

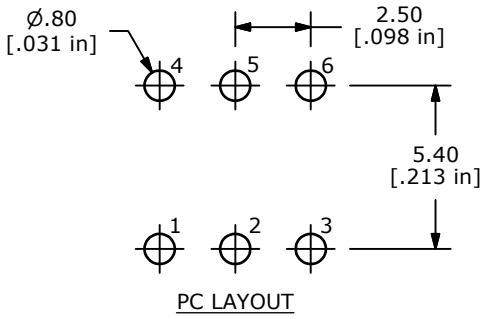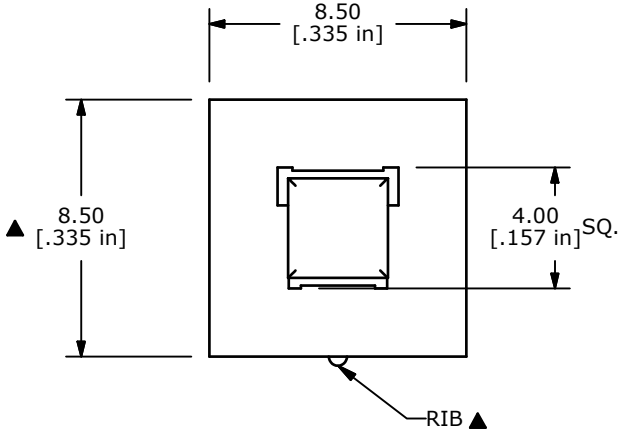



PC LAYOUT

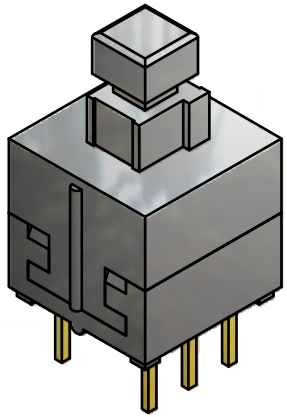


| SWITCH FUNCTION | |
|---|---|
| POS. 1 | POS. 2 |
| ON | ON |
| 2-1, 5-4 | 2-3, 5-6 |


G




CIRCUIT DIAGRAM

BREAK BEFORE MAKE▲

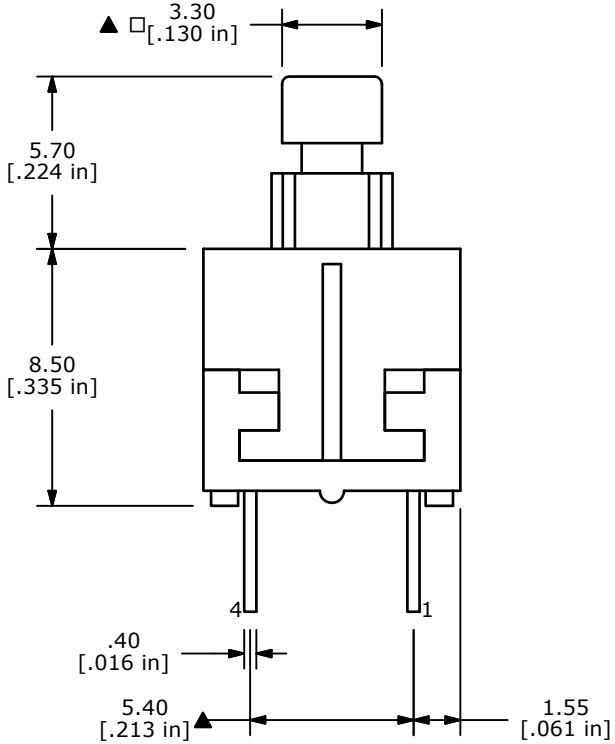

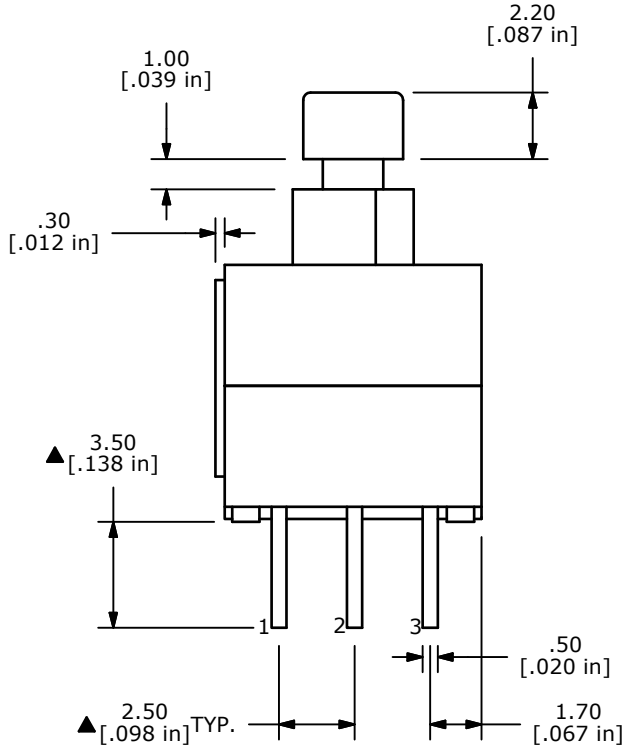
NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
▲4. RATING: 0.1A @ 30VDC
5. TRAVEL: 2.50± 0.38mm
6. OPERATING FORCE: 220± 50gf
7. ELECTRICAL LIFE: 10,000 CYCLES
8. ▲ DENOTES CRITICAL PARAMETER
9. 2002/95/EC (ROHS) COMPLIANT

| REV | PCR NO | DESCRIPTION | DATE | BY |
|---|---|---|---|---|
| H | 19697 | UPDATE CIRCUIT DIAGRAM | 2/21/11 | BGL |
| G | 19515 | CORRECTED SWITCH FUNCTION SYMBOL | 12/10/10 | BGL |
| F | 18017 | Redrawn and force chganged from 180 | 3/17/08 | rc |

*THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED*

E-SWITCH™

TITLE TL2201EEYA

| SCALE | DATE | DR | DWG | REV |
|---|---|---|---|---|
| 2:1 | 3/17/2008 | rc | P010354 | H |