

PMC-1402



PMC-1402

Standard Reed Switch

Electrical Characteristics @ 25 °C

Contact form		A
Contact material		Rh/Ru
Contact rating max.	W / VA	10
Switching voltage max.	VDC	200
	VAC	140
Switching current max.	A	0.5
Carry current max.	A	1
Breakdown voltage min.	VDC	250
Contact resistance max. (initial)	mΩ	100
Insulation resistance min.	Ω	10 ¹⁰

Features

- Form A switch (normally open type)
- Standard size with 14 mm glass length
- Economic, compact size
- Various sensitivity ranges available

Magnetical Characteristics (of unmodified Reed Switch) @ 25 °C

Pull in range available	AT	10 - 20
Drop out min.	AT	60 % of PI
Test coil	TC	014
Test equipment tolerance	± AT	2

Approvals



Operating Characteristics @ 25 °C

Switching frequency max.	Hz	500
Resonant frequency typ.	Hz	5200
Operate time max. (incl. bounce)	ms	0.55
Release time max.	ms	0.2

Environmental Characteristics

Operating temperature	°C	-40 to +125
Vibration (50-2000 Hz)	g	30
Shock (1/2 sin 11 ms)	g	100

Life Expectancy

Resistive load	Voltage	Current	Operations
	5 VDC	0.01 A	2 x 10 ⁸
	24 VDC	0.25 A	2 x 10 ⁷

Ordering Information


Packing Unit	1000 pcs
Weight per piece	0.13 g
Weight per package	674 g
Standard AT ranges	

- 10 to 15 AT
- 15 to 20 AT
- 20 to 25 AT
- 25 to 30 AT

Ordering example

PMC-14021015 describes PMC-1402 with 10 to 15 AT.

Dimensions in mm

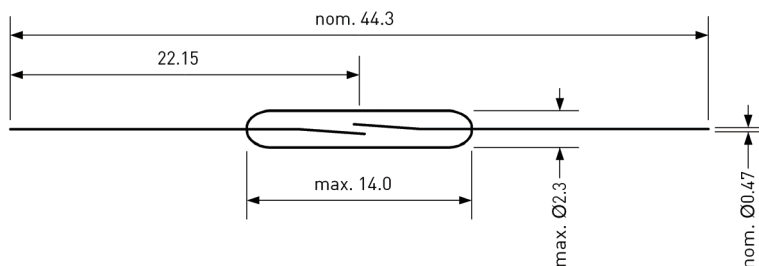

© PIC GmbH