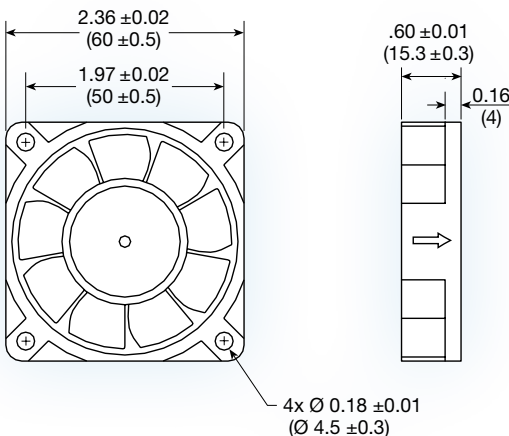
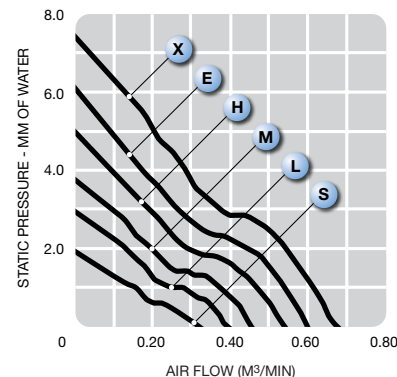


## G6015-G series

**(60 x 60 x 15 mm)**

2.36 x 2.36 x 0.60 inches

|                        |                                                                                       |
|------------------------|---------------------------------------------------------------------------------------|
| <b>Features:</b>       | <b>high static pressure impeller design</b>                                           |
| <b>Construction:</b>   | UL94V-0 PBT impeller & frame                                                          |
| <b>Bearing option:</b> | ball bearing                                                                          |
| <b>Connection:</b>     | AWG 26, UL1007 lead wires                                                             |
| <b>Frame:</b>          | ribbed                                                                                |
| <b>Protection:</b>     | thermal                                                                               |
| <b>Options:</b>        | tachometer output or locked rotor alarm signal; encapsulated motor; PWM speed control |

| Model No.       | Rated Voltage<br>V | Current mA |     |     | Speed<br>RPM | Air Volume |      | Max. Static Pressure (H <sub>2</sub> O) |      | Sound Noise<br>dB(A) | Weight<br>g |
|-----------------|--------------------|------------|-----|-----|--------------|------------|------|-----------------------------------------|------|----------------------|-------------|
|                 |                    | 5          | 12  | 24  |              | M³/Min.    | CFM  | MM                                      | INCH |                      |             |
| <b>G6015S-G</b> | 5/12               | 90         | 70  | -   | 2,800        | 0.32       | 11.0 | 1.94                                    | 0.08 | 21                   | 26          |
| <b>G6015L-G</b> | 5/12/24            | 130        | 90  | 65  | 3,400        | 0.39       | 14.0 | 2.96                                    | 0.12 | 25                   | 26          |
| <b>G6015M-G</b> | 5/12/24            | 220        | 110 | 75  | 4,000        | 0.46       | 16.0 | 3.78                                    | 0.15 | 28                   | 26          |
| <b>G6015H-G</b> | 5/12/24            | 280        | 130 | 95  | 4,600        | 0.54       | 19.0 | 5.00                                    | 0.20 | 30                   | 26          |
| <b>G6015E-G</b> | 5/12/24            | 350        | 180 | 110 | 5,200        | 0.60       | 21.0 | 6.12                                    | 0.24 | 32                   | 26          |
| <b>G6015X-G</b> | 12/24              | -          | 230 | 130 | 5,800        | 0.68       | 24.0 | 7.45                                    | 0.29 | 35                   | 26          |