



## SS12 THRU SS110

### 1.0 AMP SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS



#### FEATURES

- \* Ideal for surface mount applications
- \* Easy pick and place
- \* Built-in strain relief
- \* Low forward voltage drop

#### MECHANICAL DATA

- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Metallurgically bonded construction
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.063 grams


#### VOLTAGE RANGE

20 to 100 Volts

#### CURRENT

1.0 Ampere

#### DO-214AC(SMA)

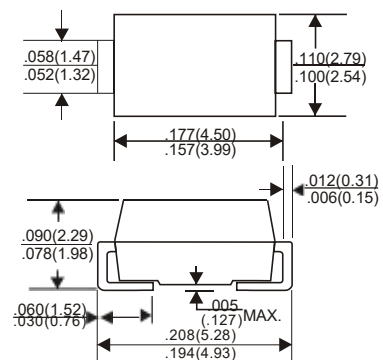

Dimensions in inches and (millimeters)

#### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

TYPE NUMBER	SS12	SS13	SS14	SS15	SS16	SS18	SS19	SS110	UNITS	
Maximum Recurrent Peak Reverse Voltage	20	30	40	50	60	80	90	100	V	
Maximum RMS Voltage	14	21	28	35	42	56	63	70	V	
Maximum DC Blocking Voltage	20	30	40	50	60	80	90	100	V	
Maximum Average Forward Rectified Current										
See Fig. 1									1.0	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)									30	A
Maximum Instantaneous Forward Voltage at 1.0A	0.55				0.70		0.85		V	
Maximum DC Reverse Current Ta=25 C									0.2	mA
at Rated DC Blocking Voltage Ta=100°C									10	mA
Typical Junction Capacitance (Note1)									110	pF
Typical Thermal Resistance R JA (Note 2)									50	C/W
Operating Temperature Range Tj	-65—+125				-65—+150				°C	
Storage Temperature Range Tstg	-65—+150								C	

#### NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. Thermal Resistance Junction to Ambient.

# RATING AND CHARACTERISTIC CURVES (SS12 THRU SS110)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

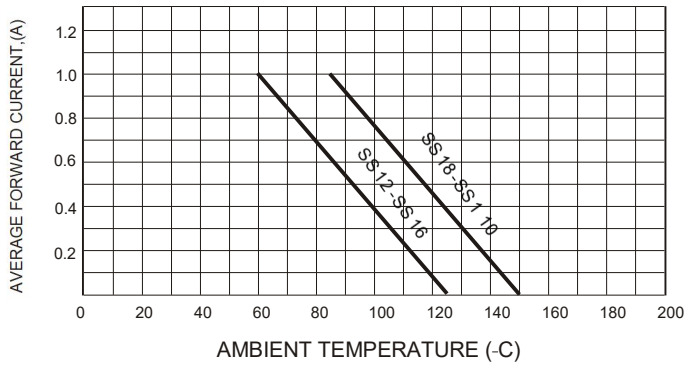


FIG.2-TYPICAL FORWARD CHARACTERISTICS

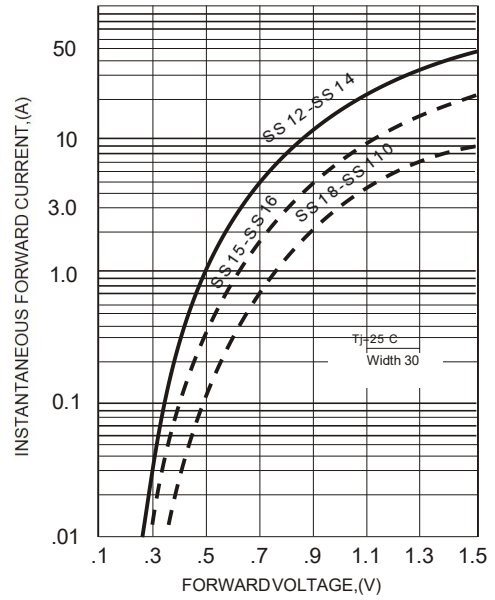


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

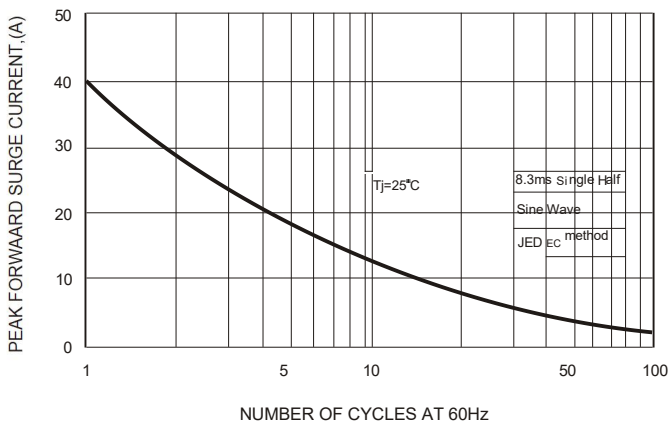


FIG.4-TYPICAL JUNCTION CAPACITANCE

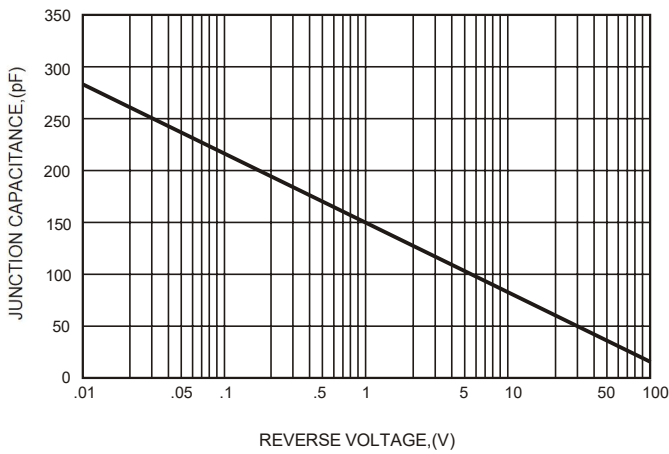


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

