




B320A THRU B3100A

SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 100 Volts Forward Current - 3.0 Amperes

DO-214AC/SMA

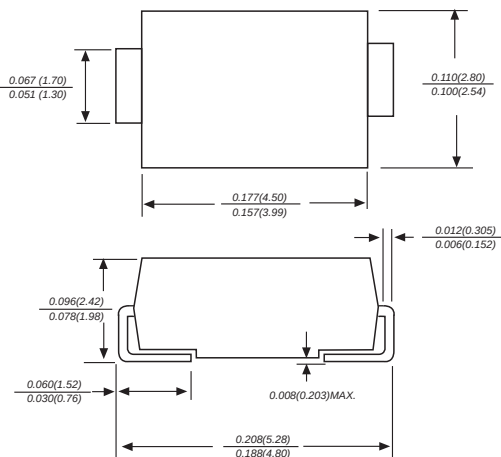

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AC molded plastic body
Terminals: leads solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.002 ounce, 0.07 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.







MDD Catalog Number	SYMBOLS	B320A	B330A	B340A	B350A	B360A	B380A	B3100A	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	80	100	VOLTS
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	56	70	VOLTS
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	80	100	VOLTS
Maximum average forward rectified current at T _L (see fig.1)	I _(AV)	3.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	100.0							Amps
Maximum instantaneous forward voltage at 3.0A	V _F	0.55			0.70		0.85		Volts
Maximum DC reverse current at rated DC blocking voltage	I _R	0.5							mA
TA=25°C TA=100°C		20					10		
Typical junction capacitance (NOTE 1)	C _J	500			300				pF
Typical thermal resistance (NOTE 2)	RθJA	55.0							°C/W
Operating junction temperature range	T _J	-50 to +125					-50 to +150		°C
Storage temperature range	T _{STG}	-50 to +150							°C

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas



RATINGS AND CHARACTERISTIC CURVES B320A THRU B3A0A

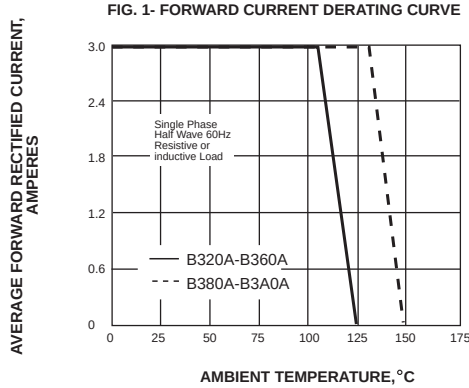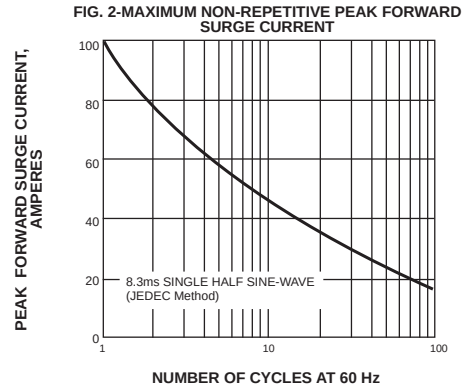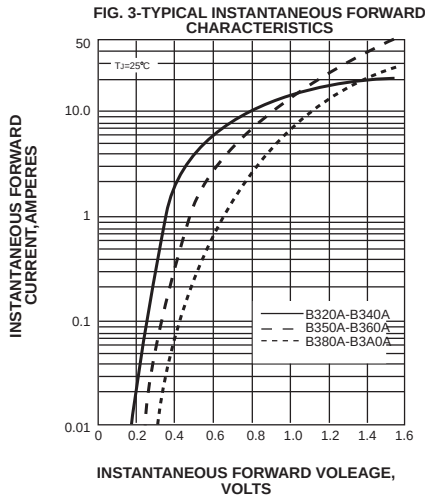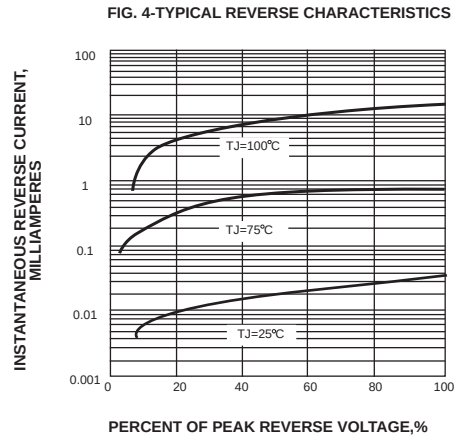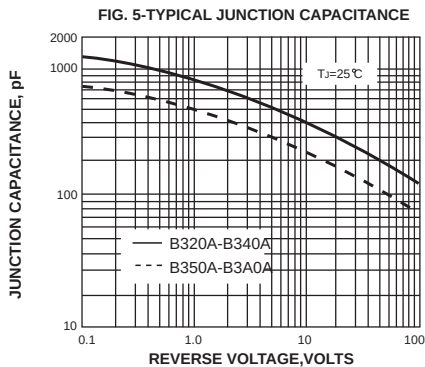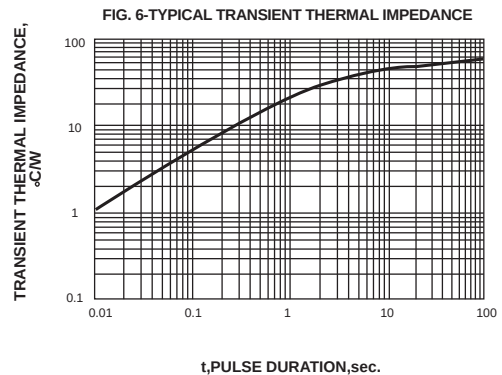

The cruve graph is for reference only, can't be the basis for judgment(曲线图仅供参考)!

