Printed-circuit board connector - MSTBVA 2,5/ 4-G-5,08 YE - 1872210

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (http://phoenixcontact.com/download)


PCB headers, nominal current: 12 A, rated voltage (III/2): 320 V, number of positions: 4, pitch: 5.08 mm, color: yellow, contact surface: Tin, mounting: Wave soldering



The figure shows a 10-position version of the product

Your advantages

- Maximum flexibility when it comes to device design – one header for connectors with different connection technologies
- Well-known mounting principle allows worldwide use
- Vertical connection enables multi-row arrangement on the PCB
- Closed contour for optimum stability of the plug-in connection

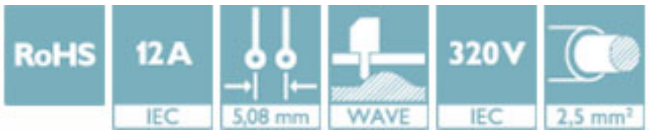

Key Commercial Data

Packing unit	250 pc
GTIN	4 055626 141633
GTIN	4055626141633

Technical data

Dimensions

Pitch	5.08 mm
Length of the solder pin	3.9 mm
Pin dimensions	1 x 1 mm

General

Range of articles	MSTBVA 2,5/..-G
Insulating material group	I
Rated voltage (III/2)	320 V
Nominal current I_N	12 A
Flammability rating according to UL 94	V0
Color	yellow

Printed-circuit board connector - MSTBVA 2,5/ 4-G-5,08 YE - 1872210

Technical data

General

Number of positions	4

Standards and Regulations

Flammability rating according to UL 94	V0

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Approvals

Approvals

Approvals

EAC

Ex Approvals

Approval details

EAC	EAC	B.01742

Phoenix Contact 2018 © - all rights reserved
http://www.phoenixcontact.com

PHOENIX CONTACT GmbH & Co. KG
Flachsmarktstr. 8
32825 Blomberg
Germany
Tel. +49 5235 300
Fax +49 5235 3 41200
http://www.phoenixcontact.com