

HSF

NOTES:

Current Rating: 2.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PA9T+30%GF UL94V-0

Ordering Information



2240 - 2 XX S XX CUNT 1

No. of Pins per Row: 42-40PIN



Contact Plating:
 G0=Gold Flash
 G3=10μ"Gold
 G4=15μ"Gold
 G5=30μ"Gold
 S0=Gold Flash/Tin
 S3=10μ"Gold/Tin
 S4=15μ"Gold/Tin
 S5=30μ"Gold/Tin
 SN=Tin
 SM=Matte Tin

Packing:
 T=Tube

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

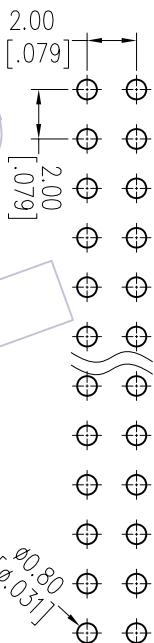

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

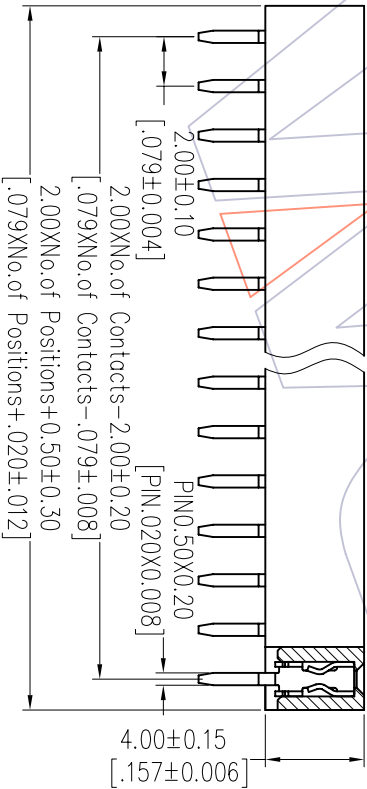

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
XX		JYHuang		2012/07/12		mm		A4		2240-2XXSXXCUNT1	
XX		CHECK		DATE		UNIT		SIZE		TITLE:	
X.XXX		±0.25		±0.15		A4		1/1		FH2.00mm DUAL ROW 180° DIP H=4.0 W=4.5	
X.XXX		Angle		± 3°		APPROVE		DATE		Customer NO.	
X.XXX		DWM		TOL		PROJ.		PROJ.		Customer NO.	
REV		DATE		MODIFICATION DESCRIPTION		CHANGE		DIM		TOL	
A0		2012/07/12		NEW		---		---		---	

WCON

Http: www.wcon.com
 WCON-Dongguan Tel: +86 769 85358920 Fax: +86 769 85358915 E-mail: sales@wcon.com
 WCON-Kunshan Tel: +86 512 57468408 Fax: +86 512 57468468 E-mail: sales@wcon.com