
SHEET 1 OF 1



CIRCUT: SPST
CONTACT CONFIGURATION


90° INDEXING


SWITCH FUNCTION	
POS 1	POS 2
↑	→
OFF	1-2

LEGEND

= INDICATES KEY PULL POSSIBLE

= DETENT POSITION



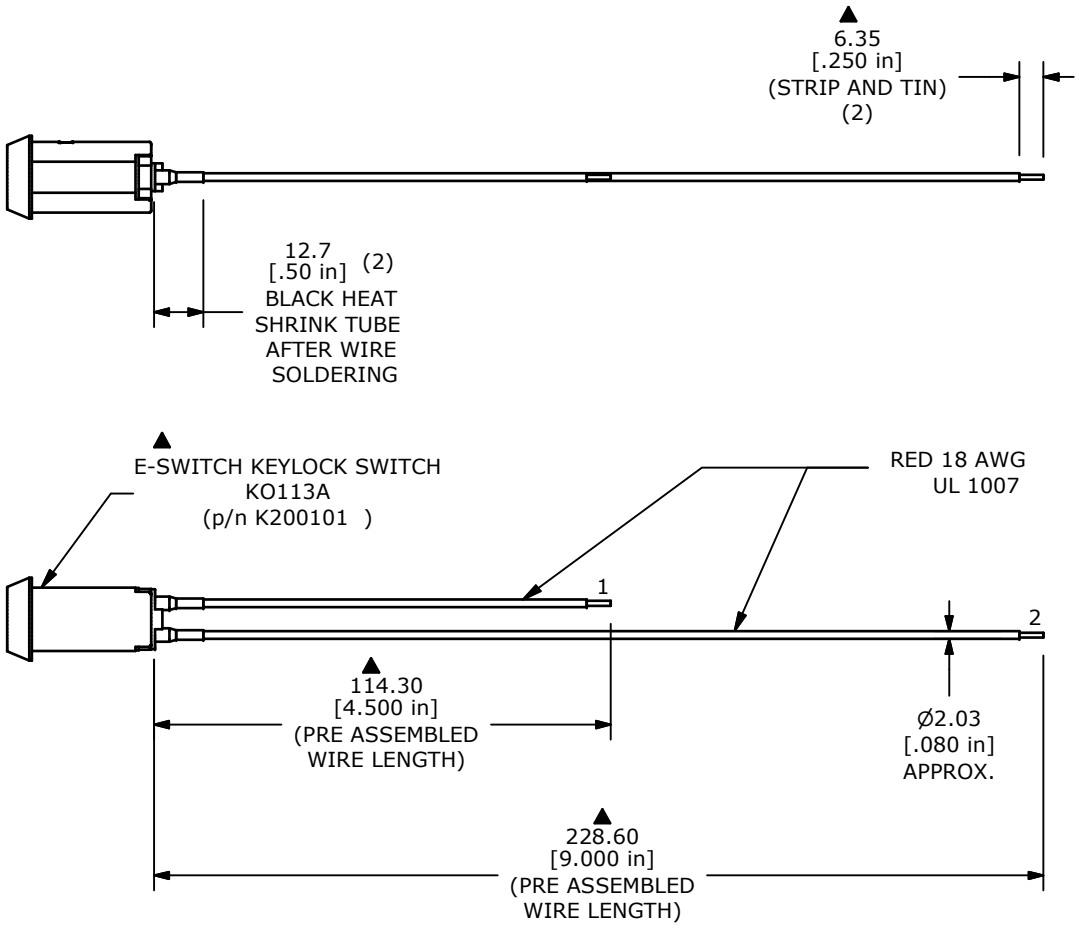

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. PLATING MATERIAL: SILVER
4. RATING: 4A @125 VAC, 2A @250 VAC
5. INSULATION RESISTANCE: 200 MEGA-OHM MIN.
6. DIELECTRIC STRENGTH: 1,500 V RMS @SEA LEVEL.
7. ▲DENOTES CRITICAL PARAMETER.
▲8. PACKAGE IN CLEAR BAG: 3 KEYS (1 INSERTED, 2 ON WIRE LOOP), 1 NUT (NOT INSTALLED ON BODY)
▲9. KEYCODE: 10003
10. 2002/95/EC (ROHS) COMPLIANT

REV	PCR NO	DESCRIPTION	DATE	BY
A	18310	RELEASE FOR PRODUCTION	11/7/08	BLR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH™

TITLE KO113A W / WIRE ASSEMBLY - KEYCODE 10003

SCALE	DATE	DR	DWG	REV
1 : 2	11/7/2008	BLR	XK0003P	A