




ENGINEERING DATASHEET

EVEREADY BATTERY CO. 1-800-383-7323 / USA
Internet: www.energizer.com 1-800-383-7323 / CANADA
+ 44 (0) 208 920 2306 / EUROPE

ENERGIZER NO. CRV3 (ELCRV3)



Typical Dimensions in mm (inches)

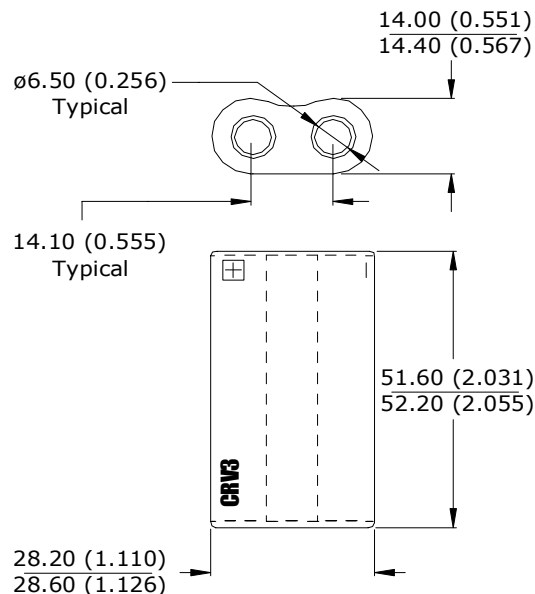

This battery Contains a Positive Temperature Coefficient (PTC) Device to Limit Current Flow

Simulated Application Test
Estimated Service at 21°C (70°F)

Schedule:	Typical Constant Current Drains at 2.6V	Cutoff Voltage 2.0V
Continuous Discharge	200 mA	14.7 Hours
Continuous Discharge	1000 mA	2.7 Hours

Schedule:	Typical Constant Power Drains at 2.6V	Cutoff Voltage 2.0V
Continuous Discharge	1000 mW	7.6 Hours
Continuous Discharge	2000 mW	3.4 Hours

Chemical System: Lithium/Iron Disulfide (Li/FeS₂)

Designation: Not Issued Yet

Battery Voltage: 3.0 Volts

Typical Weight: 32 grams (1.1 oz.)

Typical Volume: 24 cubic centimeters (1.5 cubic inch)

Average Capacity: 2900 mAh to 2.0 volts
(Rated Capacity at 200 mA at 21°C)

Storage Temp: -40°C to 60°C (-40°F to 140°F)


Operating Temp: -40°C to 60°C (-40°F to 140°F)

Max Discharge: 2 Amps Continuous
3 Amps Pulse (2 seconds max)


Cells: Two-15LF in series

Jacket: Non-magnetic Plastic Label

Typical Constant Current @21°C
Continuous Discharge Characteristics

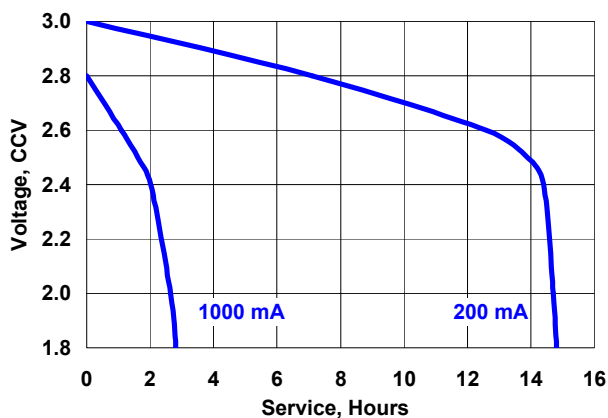

Typical Constant Power @21°C
Continuous Discharge Characteristics

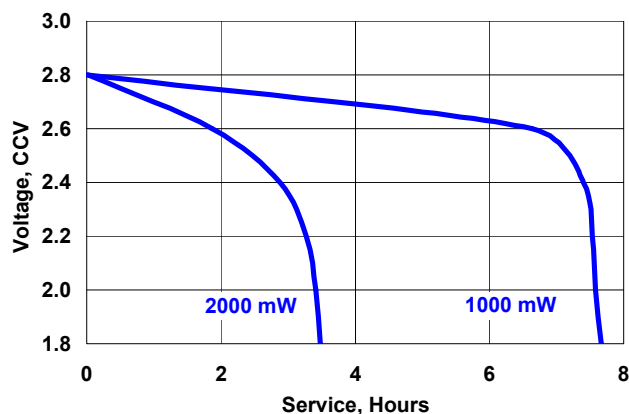

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. Inc. - All Rights Reserved