



CIRCUIT



P.C.B LATOUT

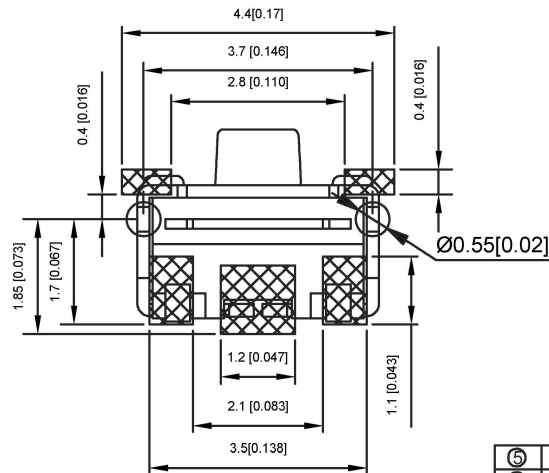

SPECIFICATION

Contact Rating: 50mA 12V DC
 Contact Resistance: 100mΩ max
 Insulation Resistance: 100MΩ min.500V DC
 Dielectric Strength: 250V AC/1 minute
 Travel: 0.15mm
 Operating Temp: -25°C +70°C
 Storage Temp: -30°C +80°C

PAPT NO	TS-1010GS-X
Operating Force	A:100gf B:160gf C:260gf
Height	H:3.05

⑤	Terminal	—	2	Brass (0.30t)	ag Plated	—
④	Contact	—	2	F.ag/SUS	—	—
③	Base	—	1	LCP	Natural	—
②	Cover	—	1	Brass	Tin plated	—
①	Keystake	—	1	LCP	—	—
ITEM	PAPT NAMF	TER.NO	QTY	MATERIAL	FINISHING	REMARK

广东星坤科技股份有限公司

生	ΔX	日期
效	ΔX	日期
ΔX		
MAX		

DSND		DATE		SCALE: N/A	MODEL TYPE: TACT SWITCH
DWN		DATE		VIEW:	PART NO.:
CHKD		DATE		UNIT: mm/in	DWG NO.:
APPD		DATE		SIZE: A4	TS-1010GS-X
UNSPECIFIED TOLERANCES				KXB INDUSTRIAL PRECISION CO.,LIMITED	WEIGHT SHEET REVISION 1.0g 1/1 A0

文件工程章

REVISIONS
 www.helloxkb.com www.helloxkb.cn