MOLLY-S

~25° spot beam




TECHNICAL SPECIFICATIONS:

Dimensions	Ø 69.8 mm
Height	24.8 mm
Fastening	
Colour	clear
Box size	480 x 280 x 300 mm
Box weight	9.7 kg
Quantity in Box	198 pcs
ROHS compliant	yes

MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour
MOLLY-S	Lens	PMMA	clear

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

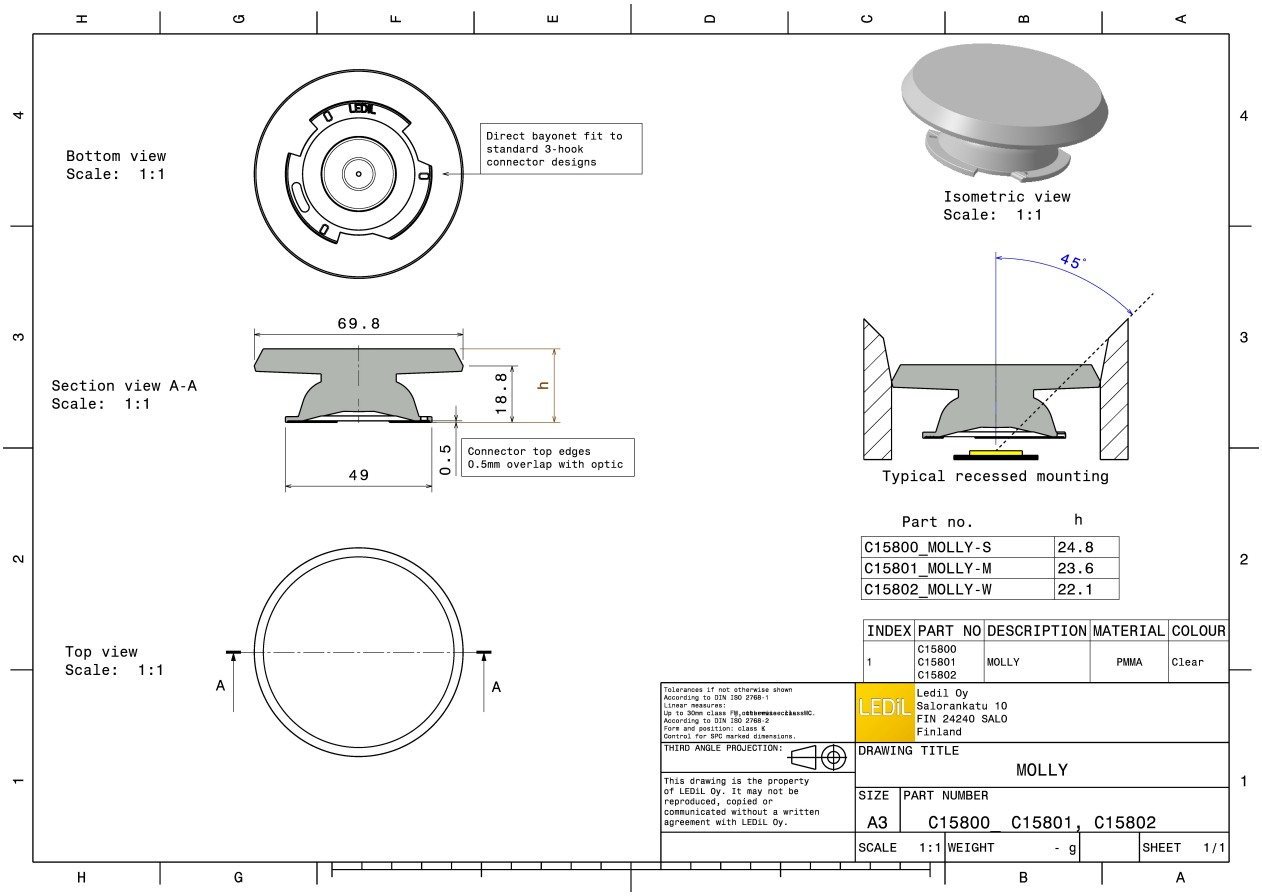

Part no.	h
C15800_MOLLY-S	24.8
C15801_MOLLY-M	23.6
C15802_MOLLY-W	22.1

INDEX	PART NO	DESCRIPTION	MATERIAL	COLOUR
1	C15800 C15801 C15802	MOLLY	PMMA	Clear

Tolerances if not otherwise shown
According to DIN ISO 2768-1
Linear measures:
Up to 30mm class f
According to DIN ISO 2768-2
Form and position: class K
Control for SPC marked dimensions.

THIRD ANGLE PROJECTION:

This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy.

LEDiL
Ledil Oy
Salorankatu 10
FIN 24240 SALO
Finland

DRAWING TITLE
MOLLY

SIZE	PART NUMBER
A3	C15800_ C15801, C15802

SCALE 1:1 | WEIGHT - g | SHEET 1/1

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

bridgelux

LED	Vero SE 13
FWHM	23.0°
Efficiency	90 %
Peak intensity	4.200 cd/lm

Required components:
C16402_CLAMP-VEROSE-13-18



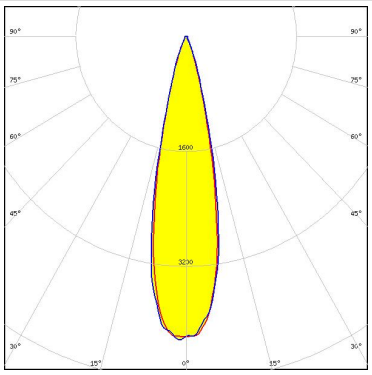


bridgelux

LED	Vero SE 18
FWHM	31.0°
Efficiency	88 %
Peak intensity	2.400 cd/lm

Required components:
C16402_CLAMP-VEROSE-13-18




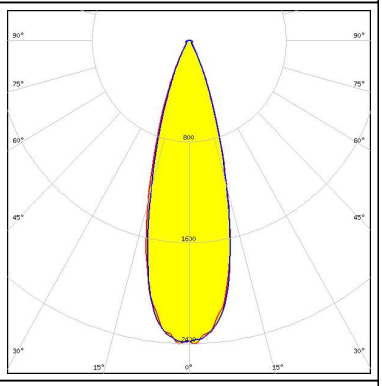


CITIZEN

LED	CLL03x/CLU03x
FWHM	23.0°
Efficiency	87 %
Peak intensity	3.870 cd/lm

Required components:
Bender Wirth: 433 Typ L1

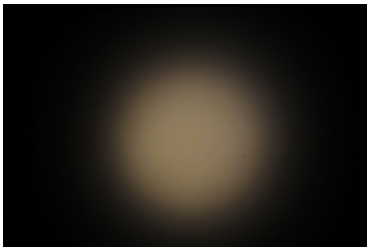

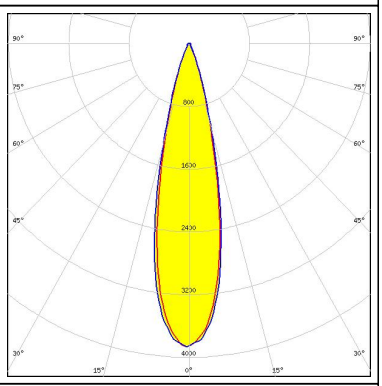


CREE

LED	CMA1840
FWHM	26.0°
Efficiency	91 %
Peak intensity	3.500 cd/lm

Required components:
C14123_CLAMP-CXA15-18



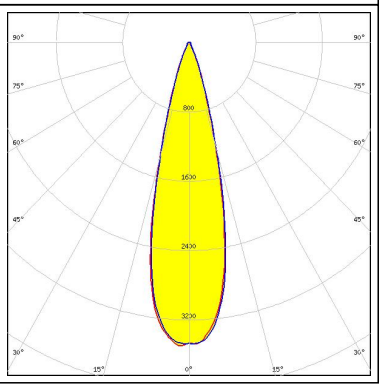

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (MEASURED):

CREE

LED	CMA2550
FWHM	32.0°
Efficiency	89 %
Peak intensity	2.200 cd/lm

Required components:
C14036_CLAMP_CXA25-30



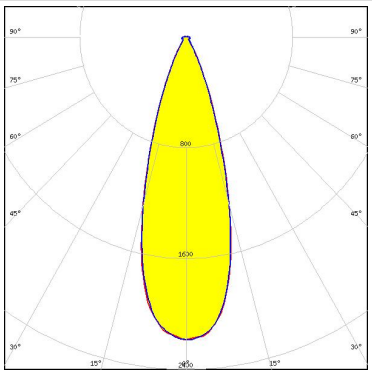


CREE

LED	CMA3090
FWHM	37.0°
Efficiency	86 %
Peak intensity	1.600 cd/lm

Required components:
C14036_CLAMP_CXA25-30



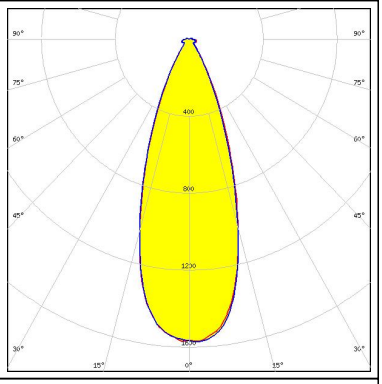


PHILIPS

LED	Fortimo SLM L15 Standard
FWHM	26.0°
Efficiency	88 %
Peak intensity	3.100 cd/lm

Required components:
TE: OPTIC CLIP Z50 TYPE1 2213194-1



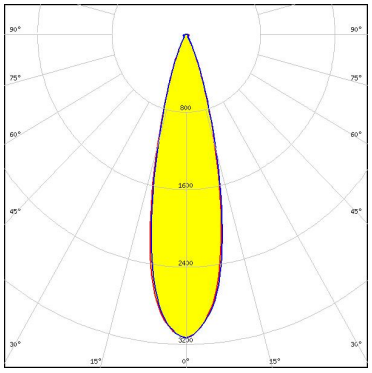


XICATO

LED	XIM - 19mm LES
FWHM	28.0°
Efficiency	89 %
Peak intensity	2.600 cd/lm

Required components:
C16491_XTM-ADAPTER-50-A



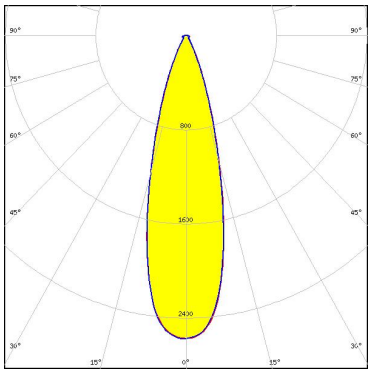

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (SIMULATED):

bridgelux

LED	VERO13
FWHM	21.0°
Efficiency	90 %
Peak intensity	5.200 cd/lm

Required components:

C13658_CLAMP-VERO13-18

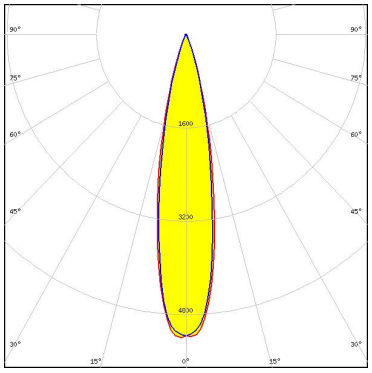


CITIZEN

LED	CLL02x/CLU02x (LES10)
FWHM	16.0°
Efficiency	87 %
Peak intensity	8.780 cd/lm

Required components:

Bender Wirth: 434 Typ L1

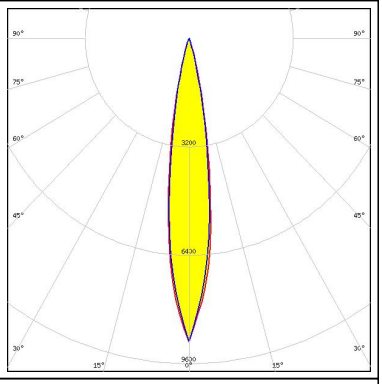


CREE

LED	CXA/B 1816 & CXA/B 1820 & CXA 1850
FWHM	19.0°
Efficiency	89 %
Peak intensity	6.450 cd/lm

Required components:

LEDiL: C14123_CLAMP-CXA15-18

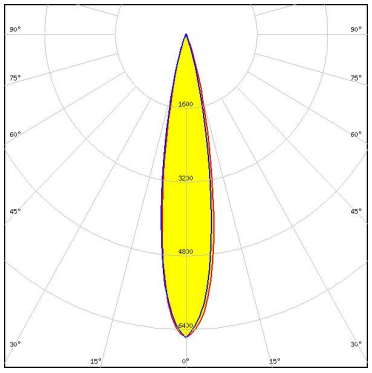


CREE

LED	CXA/B 25xx
FWHM	25.0°
Efficiency	85 %
Peak intensity	3.500 cd/lm

Required components:

LEDiL: C14036_CLAMP-CXA25-30

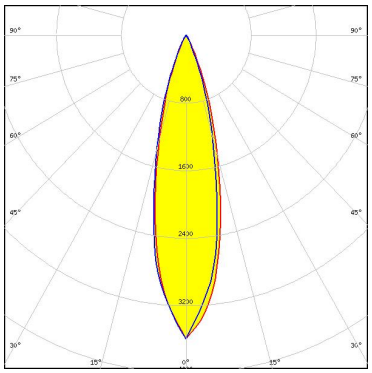

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.


PHOTOMETRIC DATA (SIMULATED):

TRIDONIC

LED	SLE G6 LES15 H D50
FWHM	23.0°
Efficiency	82 %
Peak intensity	0.000 cd/lm

Required components:

TE: OPTIC CLIP Z50 TYPE1 2213194-1

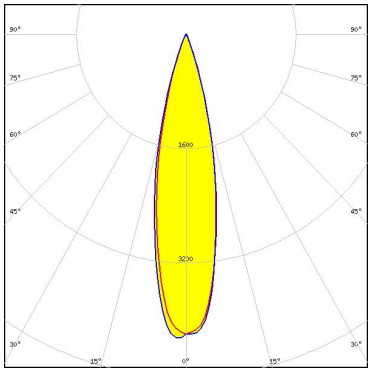


TRIDONIC

LED	SLE G6 LES17 H
FWHM	27.0°
Efficiency	85 %
Peak intensity	3.700 cd/lm

Required components:

TE: OPTIC CLIP Z50 TYPE1 2213194-1

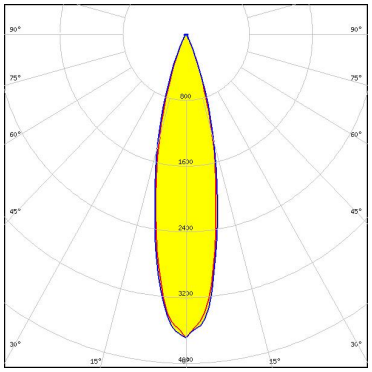


TRIDONIC

LED	SLE G6 LES19 H
FWHM	26.0°
Efficiency	81 %
Peak intensity	3.070 cd/lm

Required components:

TE: OPTIC CLIP Z50 TYPE1 2213194-1

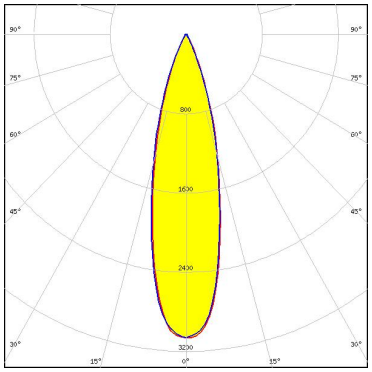

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

Due to use of high power COB's with this product, special attention to proper thermal design is highly recommended. LEDiL has no liability for direct, indirect or consecutive damages arising from the LEDiL products being used outside of the recommended temperature range.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy
Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.
228 West Page Street
Suite D
Sycamore IL 60178
USA

Local sales and technical support
www.ledil.com/
where_to_buy

Shipping locations
Salo, Finland
Hong Kong, China

Distribution Partners
www.ledil.com/
where_to_buy

LEDiL is a registered trademark of LEDiL Oy in the European Union, USA, and certain other countries.