


CO-760PS Series Surface Mount Oven Controlled Crystal Oscillators

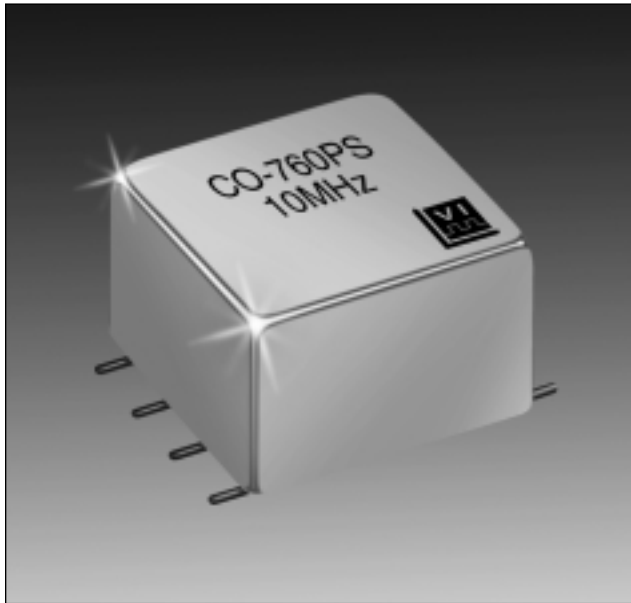

Features

- Frequencies Available from 4.8 MHz to 61.44 MHz.
- Stability as high as $\pm 2 \times 10^{-8}$ over -20°C to $+70^{\circ}\text{C}$
- Aging: 5×10^{-9} / day to 5×10^{-10} / day
- Package: 0.8" x 0.8" x 0.6" (20.5 x 20.5 x 15.2 mm)
- Low Profile, Surface Mount Design
- Supply Voltage: +5 volts or +3.3 volts

Applications

- Telecommunication Systems
- Wireless Communication Equipment
- Data Communications
- Instrumentation

Description

Vectron International has introduced a series of low profile, surface mount, oven controlled crystal oscillators (OCXOs) available in frequencies from 4.8 MHz to 61.44 MHz.

The model CO-760PS provides exceptionally low aging rates and high temperature stabilities and is packaged as a surface mount device (SMD), measuring 0.8" x 0.8" x 0.6" (20.5mm x 20.5 mm x 15.2 mm).

The oscillators are available with SC or AT cut crystals and provide an aging rate as low as 5×10^{-10} /day with temperature stabilities from $\pm 2 \times 10^{-8}$ over -20°C to $+70^{\circ}\text{C}$ and operate from a +5V supply steady power of 1watt. The phase noise floor at 50 kHz is - 140 dBc/Hz for AT cut crystals and - 145 dBc/Hz for SC types, depending on the output frequency.

The product finds application in telecommunications, data communications, frequency synthesizers, timing, navigation, telemetry and instrumentation systems.


CO-760PS Series Surface Mount Oven Controlled Crystal Oscillators

Performance Characteristics


| Parameter | Characteristic | |
|---|---|--|
| | CO-764/766/767PS Series (AT cut crystal) | CO-767/768PS Series (SC cut crystal) |
| Frequency: | 4.8 MHz to 61.44 MHz with 5, 10, 13, 16.384, 20, 20.48, 26, 38.88, 52 and 61.44 MHz standard | |
| Temperature stability: Temperature Range B: 0°C to +50°C Temperature Range D: -20°C to +70°C Temperature Range J: -10°C to +75°C | B38: $\pm 3 \times 10^{-8}$ D58: $\pm 5 \times 10^{-8}$ J17: $\pm 1 \times 10^{-7}$ | B18: $\pm 1 \times 10^{-8}$ D28: $\pm 2 \times 10^{-8}$ J58: $\pm 5 \times 10^{-8}$ |
| Aging: | CO-764PS: 5×10^{-9} /day (5×10^{-7} /year) CO-766PS: 3×10^{-9} /day (3×10^{-7} /year) CO-767PS: 1×10^{-9} /day (1×10^{-7} /year) | CO-767PS: 1×10^{-9} /day (1×10^{-7} /year) CO-768PS: 5×10^{-10} /day (5×10^{-8} /year) optional for some frequencies |
| Warm-up: (after 24 hours off) | to within 1×10^{-7} of final frequency in 5 minutes @ 25°C | to within 1×10^{-8} of final frequency in 5 minutes @ 25°C |
| Frequency vs. Supply ($\pm 5\%$): | 5×10^{-9} per percent | 2×10^{-9} per percent |
| Short Term (Allan Variance): | 1×10^{-10} /second | 5×10^{-11} /second |
| Output level: | HCMOS/TTL Standard, >0.5 Vrms/50Ω (+7 dBm) optional (LVCMOS output with +3.3 volt power supply) | |
| Harmonics (sinewave): | -25 dBc | |
| Power supply: | +5 Vdc $\pm 5\%$; 2.5W peak @ -20°C; 1.0W stabilized at 25°C (+3.3 VdC $\pm 5\%$, optional) | |
| Frequency adjustment: | $\pm 5 \times 10^{-6}$ typical for 0 to 4V control | $\pm 2 \times 10^{-6}$ typical for 0 to 4V control |
| Phase Noise: (typical) | -100 dBc/Hz @ 10 Hz offset -140 dBc/Hz @ 50 kHz offset | -110 dBc/Hz @ 10 Hz offset -145 dBc/Hz @ 50 kHz offset |
| Size: | 0.8" x 0.8" x 0.6" max. (20.5 x 20.5 x 15.2mm) | |
| Base: | FR4 material with Gull wing leads | |
| Reflow: | 240 (+5, -0)°C for 10 to 40 seconds | |

CO-760PS Series Surface Mount Oven Controlled Crystal Oscillators

Outline Drawing

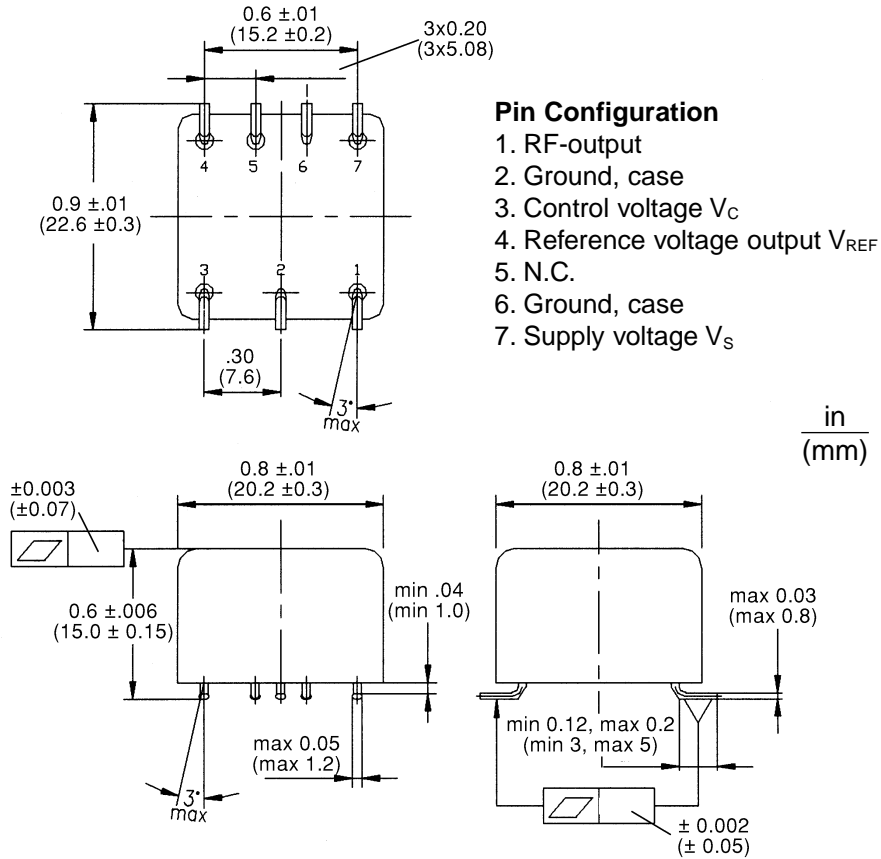


Recommended Soldering Profile

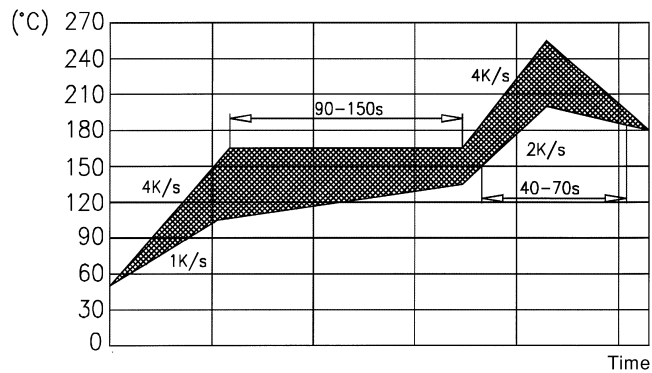

CO-760PS Series Surface Mount Oven Controlled Crystal Oscillators

Tape and Reel

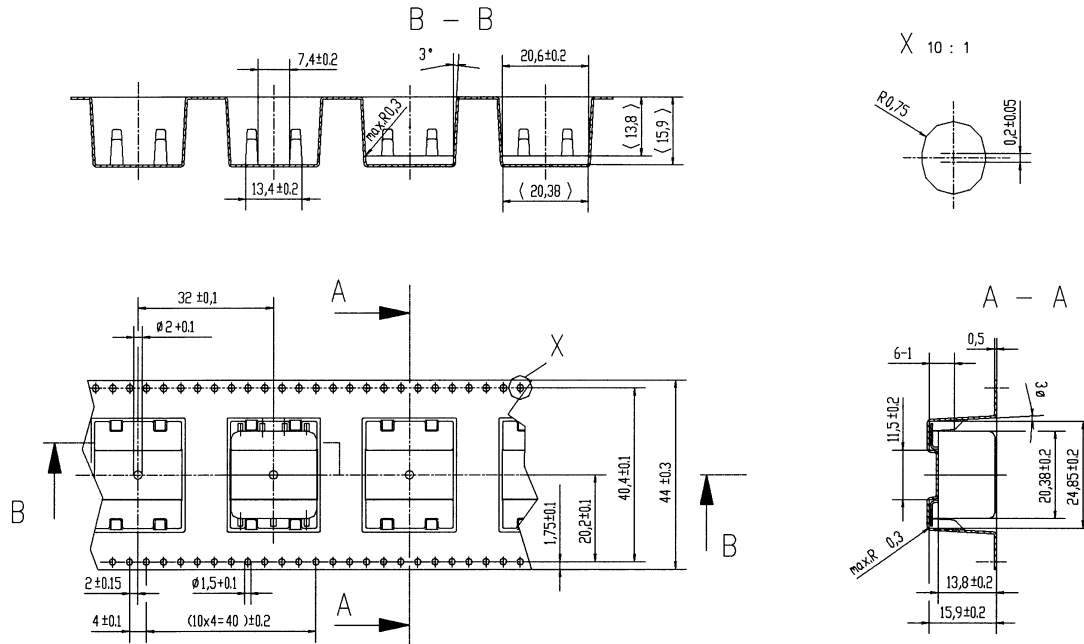

Note: Dimensions in mm

How To Order

CO-76

PS

Aging

4 = 5×10^{-9} /day (5×10^{-7} /yr)
 6 = 3×10^{-9} /day (3×10^{-7} /yr)
 7 = 1×10^{-9} /day (1×10^{-7} /yr)
 8 = 5×10^{-10} /day (5×10^{-8} /yr)
 optional for some frequencies

Temperature Stability

(see page 2)
 (eg. B58 = $\pm 5 \times 10^{-8}$ over 0°C to $+50^\circ\text{C}$)

Frequency

Output Option

1: HCMOS/LSTTL
 2: Sinewave
 3: LVCMOS with
 +3.3 volt supply

www.vectron.com

For additional information please contact:



USA: Vectron International • 267 Lowell Road Hudson, NH 03051 Tel: 1-888-VECTRON-1 • Fax: 1-888-FAX-VECTRON
 EUROPE: Tel: 49 (0) 3328 4784 17 * Fax: 49 (0) 3328 4784 30
 ASIA: Tel: +86 21 28909740 / 41 / 42 Fax: +86 21 28909240 / 28909999

Vectron International reserves the right to make changes to the product(s) and/or information contained herein without notice.
 No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information.

Printed in the USA 12/99, 8/02