

—Standard Valves—

4063 AB Valve
-YB Valve

4063-AB AND 4063-YB VALVES

HIGH VACUUM CATHODE RAY TUBES.

SPECIFICATION.

	4063-AB.	4063-YB.
Dimensions.		
Maximum overall length	21" (53.5 cms.)	21" (53.5 cms.)
Maximum diameter	6½" (15.6 cms.)	6½" (15.6 cms.)
Screen diameter	5.5" (14 cms.)	5.5" (14 cms.)
Net weight	2½ lbs. (1,100 gms.)	2.65 lbs. (1,200 gms.)
Base.	Special 12 contact.	Special 12 contact.
Screen Colour.	Blue.	Blue.
Constants.		
Heater voltage	2 volts	2 volts
Nominal heater current	1.8—2 amps.	1.8—2 amps.
Maximum final anode voltage	5,000 volts	5,000 volts
*Sensitivity (approx.)	$\left\{ \begin{array}{l} \text{x plates } \frac{600}{\sqrt{V_{a_3}}} \text{ mm./volt} \\ \text{y plates } \frac{700}{\sqrt{V_{a_3}}} \text{ mm./volt} \end{array} \right.$	$\left\{ \begin{array}{l} \frac{600}{\sqrt{V_{a_3}}} \text{ mm./volt} \\ \frac{700}{\sqrt{V_{a_3}}} \text{ mm./volt} \end{array} \right.$
Maximum Input power to screen	0.01 watts per sq. cm.	0.01 watts per sq. cm.
Capacities (approx.)	$\begin{array}{l} x_1 \text{ to } x_2 \quad 2.0 \mu\mu\text{F.} \\ x_1 \text{ or } x_2 \text{ to E} \quad 16 \mu\mu\text{F.} \\ y_1 \text{ to } y_2 \quad 1.1 \mu\mu\text{F.} \\ y_1 \text{ or } y_2 \text{ to E} \quad 10 \mu\mu\text{F.} \\ G \text{ to E} \quad 18 \mu\mu\text{F.} \end{array}$	$\begin{array}{l} 2.0 \mu\mu\text{F.} \\ 16.0 \mu\mu\text{F.} \\ 1.2 \mu\mu\text{F.} \\ 3.5 \mu\mu\text{F.} \\ 18.0 \mu\mu\text{F.} \end{array}$
Conductance of any plate pair	$< \frac{1}{10} \mu\text{Mho.}$	$< \frac{1}{10} \mu\text{Mho.}$
* V_{a_3} is third anode voltage.		

OPERATING CONDITIONS.



3rd anode voltage	5,000 volts
2nd " "	approx. $0.27 \times V_{a_3}$ (adjust for focus)
1st " "	150 volts
Grid bias for maximum brilliancy	0 to -5 volts
" " cut-off	-30 volts (approx.)
" " base for modulation	30 volts

Tentative data



MC.4063-A.1
March 1939

4063 AB Valve
-YB Valve

—Standard Valves—

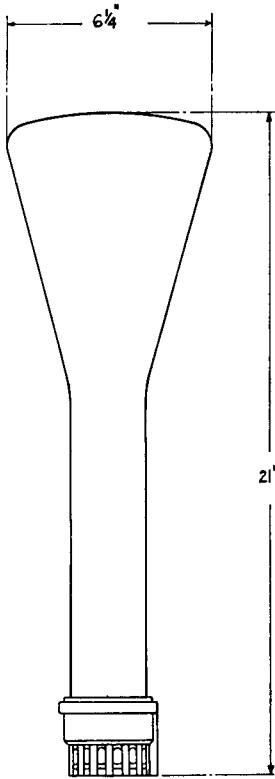

4063-AB.

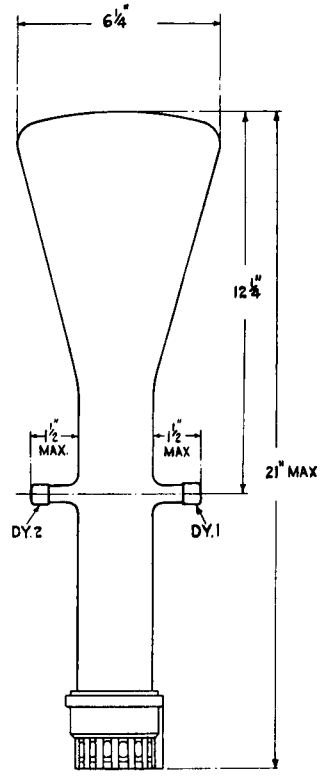

4063-YB.

PRINTED IN
ENGLAND