

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-18A (wire leads): PVC, 26 AWG

Contact & terminals:

PDSN-18B: Brass, Nickel plated


PDSN-18C: Brass, Nickel plated

PDSN-18D: Steel, Nickel plated


Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

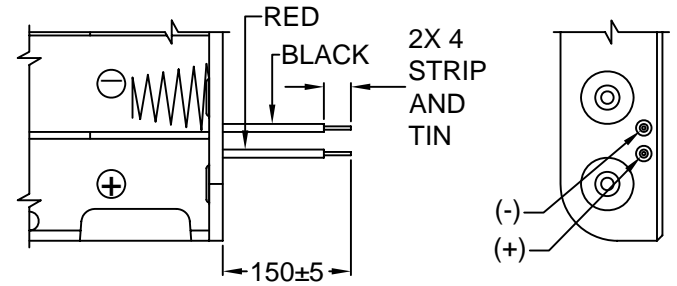


PDSN-18A WIRE LEADS

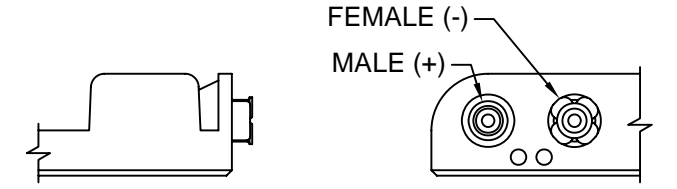




PDSN-18B SNAP TERMINAL

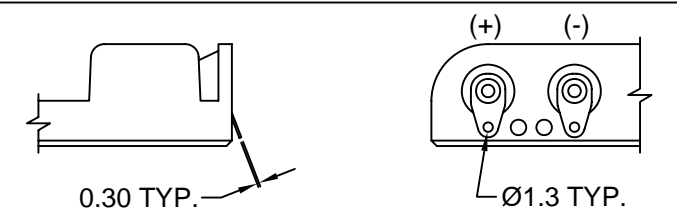

PDSN-18C SOLDER LUGS

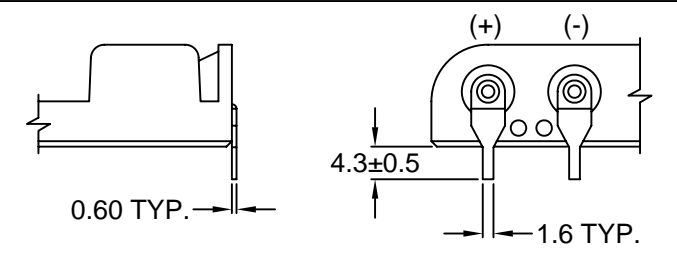

PDSN-18D PCB PINS

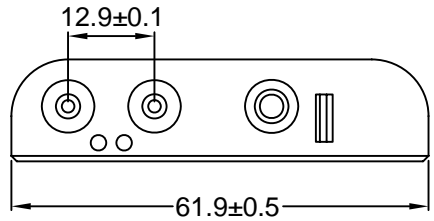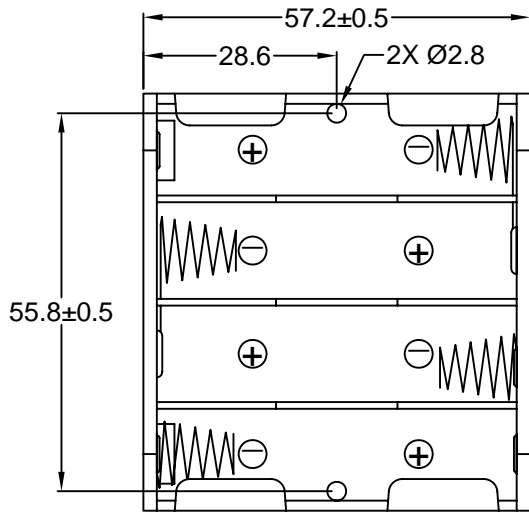

REV	DATE	CHANGE	CHNG CHECK APPR			
			TM	TD	JJ	PB
A	3/25	MATERIAL CHANGE				
B	1/11/99	ADD TOLERANCE				
C	4/12/00	REVISED & UPDATE				
D	04/02/02	REVISED / UPDATED				

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	TM
DATE:	3/21/94
CHECK BY	TD
DATE:	01/18/99
APPR BY	SS
DATE:	01/18/99

Power Dynamics, Inc.
 Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4 CELL TYPE "AA" BATTERY HOLDER
 SIDE BY SIDE

PDSN-18X

PART #: PDSN-18X

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
 DIMENSIONS ARE IN MILLIMETERS

SHEET 1 of 1

REV: D