


FE30 - 005 - FE30-08 3A FAST EFFICIENT RECTIFIER

FEATURES

- LOW POWER LOSS, HIGH EFFICIENCY
- LOW LEAKAGE
- LOW FORWARD VOLTAGE DROP
- HIGH CURRENT CAPABILITY
- HIGH SPEED SWITCHING
- HIGH RELIABILITY
- HIGH CURRENT SURGE
- GLASS PASSIVATED CHIP JUNCTION

MECHANICAL DATA

- CASE: MOLDED PLASTIC, DO201AD, DIMENSIONS IN INCHES AND (MILLIMETERS)
- EPOXY: UL 94V-0 RATE FLAME RETARDANT
- LEAD: MIL-STD-202E METHOD 208C GUARANTEED
- MOUNTING POSITION: ANY
- WEIGHT: 1.20 GRAMS

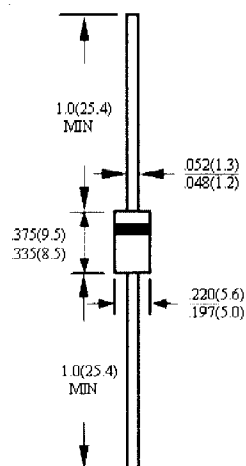

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS RATINGS AT 25°C AMBIENT TEMPERATURE UNLESS OTHERWISE SPECIFIED
SINGLE PHASE, HALF WAVE, 60 HZ, RESISTIVE OR INDUCTIVE LOAD FOR CAPACITIVE LOAD, DERATE CURRENT BY 20%

RATINGS	SYMBOL	FE30 -005	FE30 -01	FE30 -015	FE30 -02	FE30 -03	FE30 -04	FE30 -05	FE30 -06	FE30 -08	UNITS
MAXIMUM RECURRENT PEAK REVERSE VOLTAGE	V_{RRM}	50	100	150	200	300	400	500	600	800	V
MAXIMUM RMS VOLTAGE	V_{RMS}	35	70	105	140	210	280	350	420	560	V
MAXIMUM DC BLOCKING VOLTAGE	V_{DC}	50	100	150	200	300	400	500	600	800	V
MAXIMUM AVERAGE FORWARD RECTIFIED CURRENT 0.375" (9.5mm) LEAD LENGTH AT $T_A=55^{\circ}C$	I_O	3.0									A
PEAK FORWARD SURGE CURRENT, 8.3ms SINGLE HALF SINE-WAVE SUPERIMPOSED ON RATED LOAD	I_{FSM}	60									A
TYPICAL JUNCTION CAPACITANCE (NOTE 1)	C_j	70									PF
TYPICAL THERMAL RESISTANCE (NOTE 2)	$R_{\theta JA}$	30									°C/W
STORAGE TEMPERATURE RANGE	T_{STG}	-55 TO +150									°C
OPERATING TEMPERATURE RANGE	T_{OP}	-55 TO +150									°C


ELECTRICAL CHARACTERISTICS ($A_T, T_A = -25^{\circ}C$ UNLESS OTHERWISE NOTED)

CHARACTERISTICS	SYMBOL	FE30 -005	FE30 -01	FE30 -015	FE30 -02	FE30 -03	FE30 -04	FE30 -05	FE30 -06	FE30 -08	UNITS	
MAXIMUM FORWARD VOLTAGE AT I_O DC	V_F	0.98				1.25		1.85		2.60	V	
MAXIMUM REVERSE CURRENT AT 25°C	I_R	10										μ A
MAXIMUM REVERSE CURRENT AT 100°C	I_R	50										μ A
MAXIMUM REVERSE RECOVERY TIME (NOTE 3)	T_{RR}	25										nS

NOTE: 1. MEASURED AT 1 MHZ AND APPLIED REVERSE VOLTAGE OF 4.0 VOLTS

2. BOTH LEADS ATTACHED TO HEAT SINK 20×20×1t(mm) COPPER PLATE AT LEAD LENGTH 5mm

3. REVERSE RECOVERY TEST CONDITIONS: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$



NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.

Quality Semi-Conductors