NEC

LASER DIODE
NDL7553P Series

InGaAsP STRAINED MQW DC-PBH PULSED LASER DIODE MODULE
1550nm OTDR APPLICATION

DESCRIPTION

NDL7553P Series is a 1550nm newly developed Strained Multiple Quantum Well (st-MQW) structure pulsed laser diode coaxial module with singlemode fiber. It is designed for light source of optical measurement equipment (OTDR).

FEATURES


- High output power P_f = 145 mW @I_{FP} = 1000 mA[*1]
- Long wavelength λ_C = 1550 nm
- Coaxial module without thermoelectric cooler.
- Singlemode fiber pigtail

***1** Pulse Conditions: Pulse width (PW) = 10 μs, Duty = 1 %


PACKAGE DIMENSIONS

in millimeters


NDL7553P

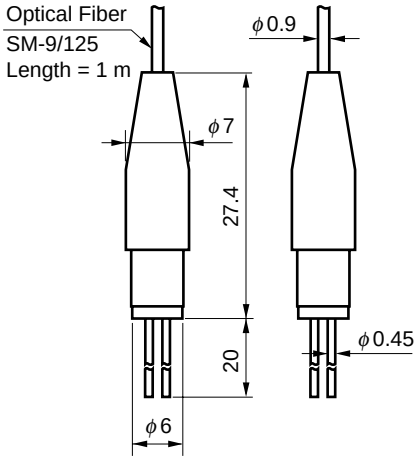


PIN CONNECTIONS

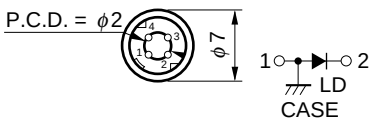

NDL7553P1

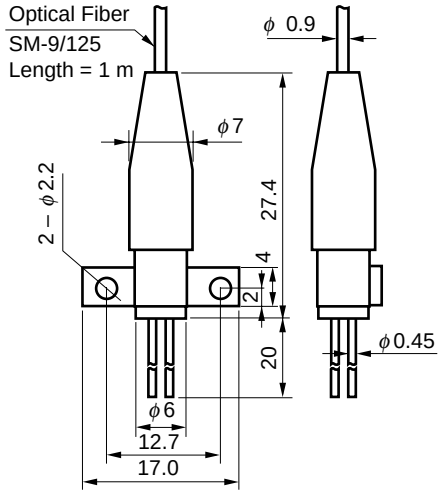

PIN CONNECTIONS

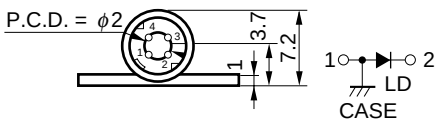

The information in this document is subject to change without notice.

Document No. P10473EJ4V0DS00 (4th edition)
Date Published October 1996 N
Printed in Japan

© NEC Corporation 1995

ORDERING INFORMATION

Part Number	Available Connector	FIange Type
NDL7553P	Without Connector	no flange
NDL7553PC	With FC-PC Connector	
NDL7553PD	With SC-PC Connector	
NDL7553P1	Without Connector	flat mount flange
NDL7553P1C	With FC-PC Connector	
NDL7553P1D	With SC-PC Connector	

ABSOLUTE MAXIMUM RATINGS (T_C = 25 °C)

Parameter	Symbol	Ratings	Unit
Pulsed Forward Current*1	I_{FP}	1.2	A
Reverse Voltage	V_R	2.0	V
Operating Case Temperature	T_C	−20 to +60	°C
Storage Temperature	T_{stg}	−40 to +85	°C
Lead Soldering Temperature (10 sec)	T_{sld}	260	°C

***1** Pulse Condition: Pulse Width (PW) = 10 μs, Duty = 1 %


ELECTRO-OPTICAL CHARACTERISTICS (T_C = 25 °C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Forward Voltage	V_{FP}	I_{FP} = 1000 mA, PW = 10 μs, Duty = 1 %		2.5	4.0	V
Threshold Current	I_{th}			45	75	mA
Optical Output Power from Fiber	P_f	I_{FP} = 1000 mA, PW = 10 μs, Duty = 1 %	95	145		mW
RMS Center Wavelength	λ_C	I_{FP} = 1000 mA, PW = 10 μs, Duty = 1 %	1530	1550	1570	nm
RMS Spectral Width	σ	I_{FP} = 1000 mA, PW = 10 μs, Duty = 1 %		7.5	10.0	nm
Rise Time	t_r	10 - 90 %			2.0	ns
Fall Time	t_f	90 - 10 %			2.0	ns


ELECTRO-OPTICAL CHARACTERISTICS (T_C = 0 to +60°C)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Threshold Current	I_{th}				100	mA
Optical Output Power from Fiber	P_f	I_{FP} = 1000 mA, PW = 10 μs, Duty = 1 %	60			mW
RMS Center Wavelength	λ_C	I_{FP} = 1000 mA, PW = 10 μs, Duty = 1 %	1520		1585	nm
Temperature Dependency of Center Wavelength	$\Delta\lambda/\Delta T$			0.35		nm/°C
RMS Spectral Width	σ	I_{FP} = 1000 mA, PW = 10 μs, Duty = 1 %			10	nm

OPTICAL OUTPUT POWER FROM FIBER vs.
LD PULSE FORWARD CURRENT

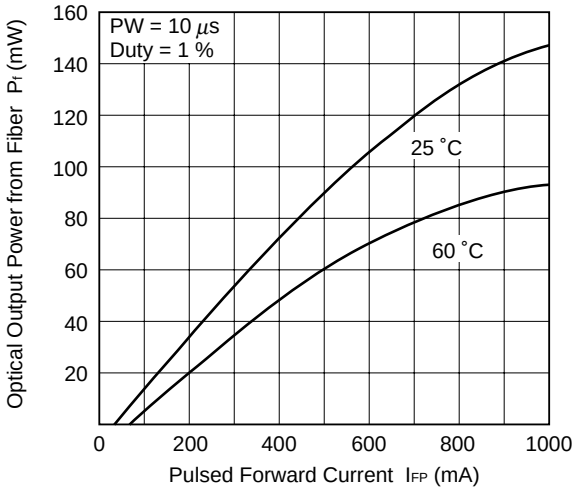

LONGITUDINAL MODE (FROM FIBER)

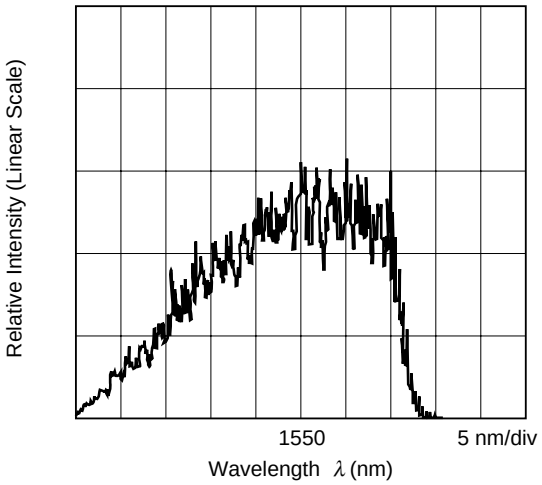

LASER DIODE FAMILY FOR OTDR APPLICATION

Features / Package	1.31 μm		1.55 μm		I_{FP}*1 (mA)	Remarks
	Part Number	P (mW) MIN./TYP.	Part Number	P (mW) MIN./TYP.		
φ5.6 CAN	NDL7103	290/320	NDL7153	220/240	1000	
	NDL7113	160/175	NDL7163	100/120	400	
4 pin Coaxial Module with SMF	NDL7503P/P1	110/180	NDL7553P/P1	95/145	1000	P : no flange P1 : with flange
	NDL7513P/P1	70/110	NDL7563P/P1	60/80	400	
	NDL7514P/P1	25/50	NDL7564P/P1	20/40	400	
	NDL7515P/P1	20/30	NDL7565P/P1	8/11	400	
14 pin DIP Module with SMF	NDL7502P	125/190	NDL7552P	100/125	1000	with TEC and Thermistor
	NDL7512P	90/110	NDL7562P	70/80	400	
	NDL7510P	40/55	NDL7560P	20/30	400	

***1** Pulse conditions: pulse width = 10 μs, duty = 1 % (modules)
pulse width = 1 μs, duty = 1 % (φ5.6 can)

REFERENCE


Document Name	Document No.
NEC semiconductor device reliability/quality control system	LEI-1201
Quality grades on NEC semiconductor devices	C11531E
Semiconductor device mounting technology manual	C10535E
Guide to quality assurance for semiconductor devices	MEI-1202
Semiconductor selection guide	X10679E


[MEMO]

[MEMO]

CAUTION

Within this module there exists GaAs (Gallium Arsenide) material which is a harmful substance if ingested. Please do not under any circumstances break the hermetic seal.





NEC Corporation
NEC Building, 7-1, Shiba 5-chome,
Minato-ku, Tokyo 108-01, Japan

Type number: _____
Manufactured: _____
Serial Number: _____
This product conforms to FDA regulations as applicable to standards 21 CFR Chapter 1. Subchapter J.

The export of this product from Japan is prohibited without governmental license. To export or re-export this product from a country other than Japan may also be prohibited without a license from that country. Please call an NEC sales representative.

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
NEC devices are classified into the following three quality grades:
"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.

Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots

Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)

Specific: Aircrafts, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.

The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.
Anti-radioactive design is not implemented in this product.

M4 96.5