Elektronische Bauelemente

SCK130LP

VOLTAGE 30V

1.0AMP Low Vf Schottky Barrier Rectifiers

RoHS Compliant Product


A suffix of "-C" specifies halogen & lead-free

FEATURES

- High Current Capability
- Extremely Low Thermal Resistance
- For Surface Mount Application
- Higher Temp Soldering : 250 °C for 10 Seconds At Terminals
- Low Forward Voltage

PACKAGE DIMENSIONS

SOD–123
PLASTIC PACKAGE

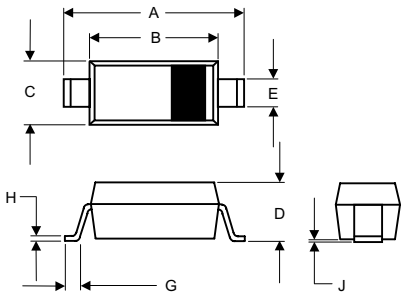

	MILLMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	3.55	3.85	0.140	0.152
B	2.55	2.85	0.100	0.112
C	1.40	1.80	0.550	0.071
D	------	1.35	------	0.053
E	0.30	0.78	0.120	0.031
G	0.15	------	0.006	-------
H	-----	0.25	-------	0.001
J	-----	0.15	-------	0.006

MECHANICAL DATA

Case: Molded plastic
Epoxy: UL 94V-0 rate flame retardant
Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
Polarity: Color band denotes cathode end
Mounting position: Any

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SCK130LP	UNITS
Maximum Recurrent Peak Reverse Voltage	30	V
Working Peak Reverse Voltage	30	
Maximum DC Blocking Voltag	30	V
Average Forward Current ($I_{F(AV)}$@ T_J=90°C)	1.0	A
Reak Forward Current (I_{FSM} @ 8.3ms half sine)	10	A
Maximum Instantaneous Forward Voltage (V_F@I_{FM} = 1.0A , T_A = 25 °C)	0.43	V
Maximum DC Reverse Current At Rated DC Blocking Voltage (I_R @ T_J = 25°C)	0.1	mA
Typical Junction Capacitance (C_J)	60	pF
Operating Temperature Range T_J	-50 ~ +125	°C
Storage Temperature Range T_{STG}	-65 ~ +150	°C

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.

Marking Code : KB

Elektronische Bauelemente


SCK130LP

VOLTAGE 30V

1.0AMP Low Vf Schottky Barrier Rectifiers

RATING AND CHARACTERISTIC CURVES (SCK130LP)

FIG.1 TYPICAL FORWARD CHARACTERISTICS

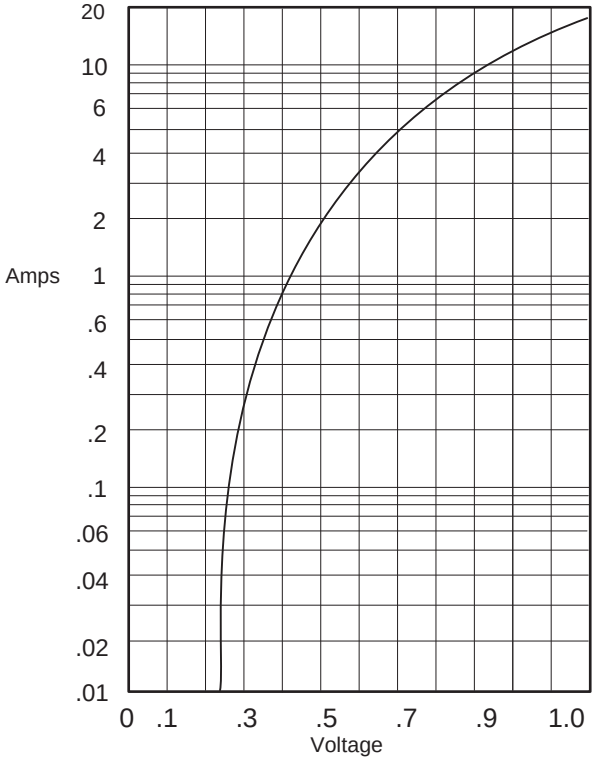

Instantaneous Forward Voltage - Volts

FIG.2-JUNCTION CAPACITANCE

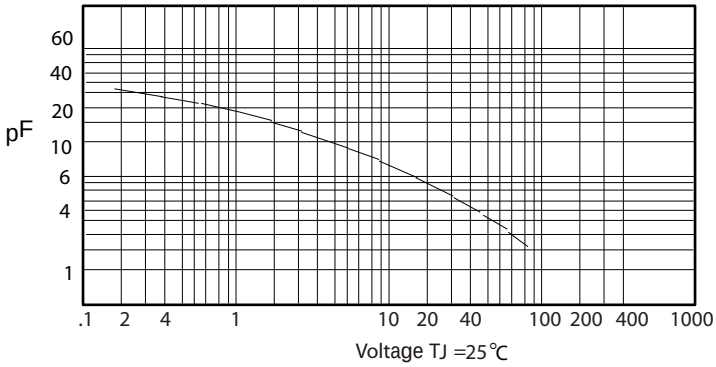


FIG. 4 - REVERSE CHARACTERISTICS



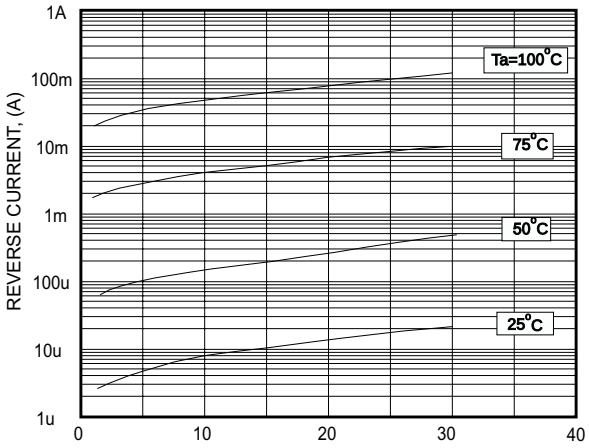


FIG.3-FORWARD DERATING CURVE

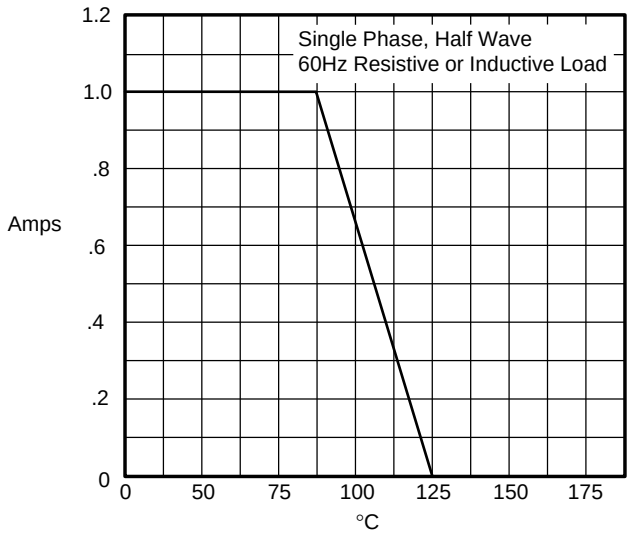

Average Forward Rectified Current - Amperesversus
Ambient Temperature - °C

FIG .5-PEAK FORWAED SURGE CURRENT

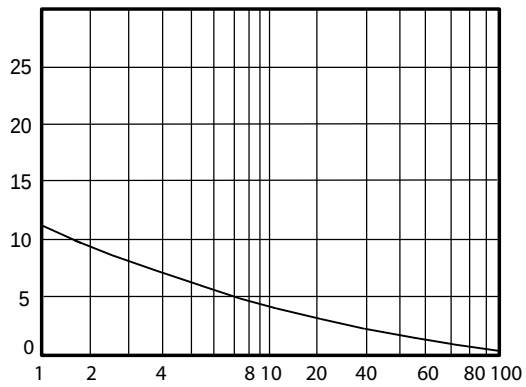

Peak Forward Surge Current - Amperesversus
Number Of Cycles At 60Hz - Cycles