Document Title

512K x16 bit Super Low Power and Low Voltage Full CMOS Static RAM

Revision History

Revision No.	History	Draft Date	Remark
0.0	Initial draft -Design Target	July 4, 2001	Preliminary
1.0	Finalize	September 26, 2001	Final

The attached datasheets are provided by SAMSUNG Electronics. SAMSUNG Electronics CO., LTD. reserve the right to change the specifications and products. SAMSUNG Electronics will answer to your questions about device. If you have any questions, please contact the SAMSUNG branch offices.

512K x 16 bit Super Low Power and Low Voltage Full CMOS Static RAM

FEATURES

- Process Technology: Full CMOS
- Organization: 512K x16
- Power Supply Voltage: 3.0~3.6V
- Low Data Retention Voltage: 1.5V(Min)
- Three State Outputs
- Package Type: 44-TSOP2-400F/R

GENERAL DESCRIPTION


The K6F8016V3A families are fabricated by SAMSUNG′s advanced full CMOS process technology. The families support various operating temperature ranges. The families also support low data retention voltage for battery back-up operation with low data retention current.

PRODUCT FAMILY

Product Family	Operating Temperature	Vcc Range	Speed	Power Dissipation		PKG Type
				Standby (I_{SB1}, Typ.)	Operating (I_{CC1}, Max)	
K6F8016V3A-F	Industrial(-40~85°C)	3.0~3.6V	55[1]/70ns	0.5µA[2]	4mA	44-TSOP2-400F/R


1. The parameter is measured with 30pF test load.
2. Typical values are measured at V_{CC}=3.3V, T_A=25°C and not 100% tested.

PIN DESCRIPTION

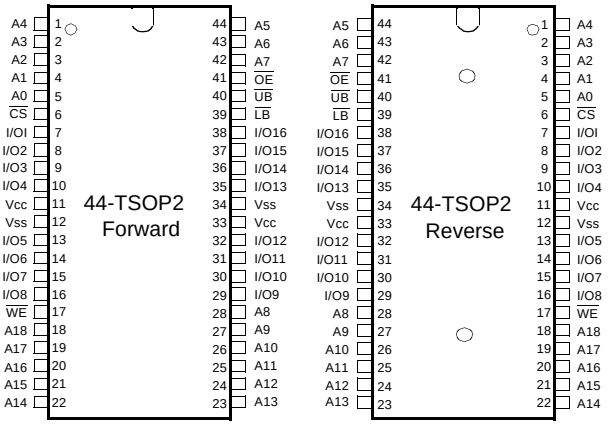

Name	Function	Name	Function
$\overline{CS}$	Chip Select Input	Vcc	Power
$\overline{OE}$	Output Enable Input	Vss	Ground
$\overline{WE}$	Write Enable Input	$\overline{UB}$	Upper Byte($I/O_{9\sim16}$)
A_0~A_{18}	Address Inputs	$\overline{LB}$	Lower Byte($I/O_{1\sim8}$)
I/O_1~I/O_{16}	Data Inputs/Outputs		

FUNCTIONAL BLOCK DIAGRAM

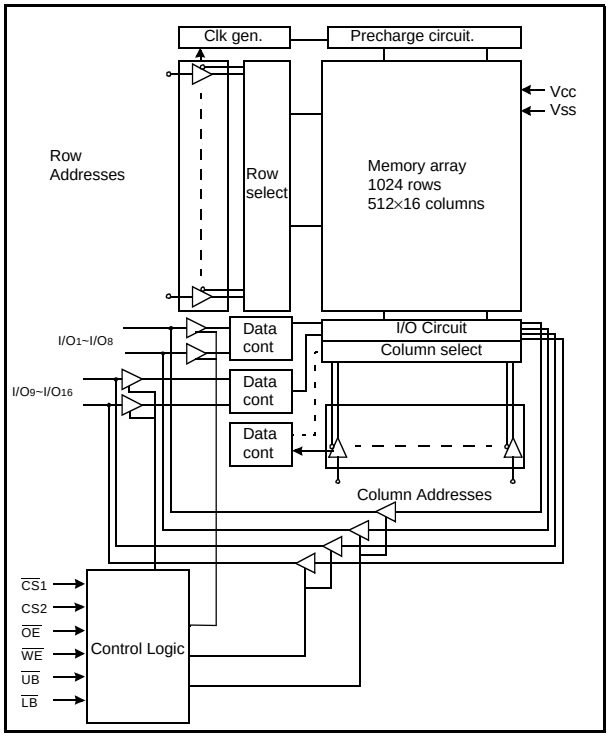

PRODUCT LIST

Industrial Temperature Products(-40~85°C)	
Part Name	**Function**
K6F8016V3A-TF55	44-TSOP2-F, 55ns, 3.3V
K6F8016V3A-TF70	44-TSOP2-F, 70ns, 3.3V
K6F8016V3A-RF55	44-TSOP2-R, 55ns, 3.3V
K6F8016V3A-RF70	44-TSOP2-R, 70ns, 3.3V

FUNCTIONAL DESCRIPTION

$\overline{CS}$	$\overline{OE}$	$\overline{WE}$	$\overline{LB}$	$\overline{UB}$	I/O1~8	I/O9~16	Mode	Power
H	X	X	X	X	High-Z	High-Z	Deselected	Standby
L	H	H	X	X	High-Z	High-Z	Output Disabled	Active
L	X	X	H	H	High-Z	High-Z	Output Disabled	Active
L	L	H	L	H	Dout	High-Z	Lower Byte Read	Active
L	L	H	H	L	High-Z	Dout	Upper Byte Read	Active
L	L	H	L	L	Dout	Dout	Word Read	Active
L	X	L	L	H	Din	High-Z	Lower Byte Write	Active
L	X	L	H	L	High-Z	Din	Upper Byte Write	Active
L	X	L	L	L	Din	Din	Word Write	Active

Note : X means don't care. (Must be low or high state)

ABSOLUTE MAXIMUM RATINGS[1)]

Item	Symbol	Ratings	Unit
Voltage on any pin relative to Vss	V_{IN},V_{OUT}	-0.2 to V_{CC}+0.3V(max.4.0V)	V
Voltage on Vcc supply relative to Vss	V_{CC}	-0.2 to 4.0	V
Power Dissipation	P_D	1.0	W
Storage temperature	T_{STG}	-65 to 150	°C
Operating Temperature	T_A	-40 to 85	°C

1. Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. Functional operation should be restricted to recommended operating condition. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

RECOMMENDED DC OPERATING CONDITIONS[1)]

Item	Symbol	Min	Typ	Max	Unit
Supply voltage	Vcc	3.0	3.3	3.6	V
Ground	Vss	0	0	0	V
Input high voltage	V_{IH}	2.2	-	Vcc+0.3[2)]	V
Input low voltage	V_{IL}	-0.3[3)]	-	0.6	V

Note:
1. Industrial products: T_A=-40 to 85°C, otherwise specified.
2. Overshoot: V_{CC}+2.0V in case of pulse width ≤20ns.
3. Undershoot: -2.0V in case of pulse width ≤20ns.
4. Overshoot and undershoot are sampled, not 100% tested.

CAPACITANCE[1)] (f=1MHz, T_A=25°C)

Item	Symbol	Test Condition	Min	Max	Unit
Input capacitance	C_{IN}	V_{IN}=0V	-	8	pF
Input/Output capacitance	C_{IO}	V_{IO}=0V	-	10	pF

1. Capacitance is sampled, not 100% tested

DC AND OPERATING CHARACTERISTICS


Item	Symbol	Test Conditions	Min	Typ[1)]	Max	Unit
Input leakage current	I_{LI}	V_{IN}=Vss to Vcc	-1	-	1	µA
Output leakage current	I_{LO}	$\overline{CS}$=V_{IH}, or $\overline{OE}$=V_{IH} or $\overline{WE}$=V_{IL}, V_{IO}=Vss to Vcc	-1	-	1	µA
Operating power supply current	I_{CC}	I_{IO}=0mA, $\overline{CS}_1$=V_{IL}, $\overline{WE}$=V_{IH}, V_{IN}=V_{IH} or V_{IL}	-	-	2	mA
Average operating current	I_{CC1}	Cycle time=1µs, 100%duty, I_{IO}=0mA, $\overline{CS}$≤0.2V, V_{IN}≤0.2V or V_{IN}≥VCC-0.2V	-	-	4	mA
	I_{CC2}	Cycle time=Min, I_{IO}=0mA, 100% duty, $\overline{CS}$=V_{IL}, VIN=V_{IL} or V_{IH}	-	-	45	mA
Output low voltage	V_{OL}	I_{OL} = 2.1mA	-	-	0.4	V
Output high voltage	V_{OH}	I_{OH} = -1.0mA	2.4	-	-	V
Standby Current(CMOS)	I_{SB1}	$\overline{CS}$≥Vcc-0.2V, Other inputs=0~Vcc	-	0.5	30	µA

1. Typical values are measured at V_{CC}=3.3V, T_A=25°C and not 100% tested.

AC OPERATING CONDITIONS

TEST CONDITIONS(Test Load and Input/Output Reference)

Input pulse level: 0.4 to 2.2V
Input rising and falling time: 5ns
Input and output reference voltage:1.5V
Output load(see right): C_L=100pF+1TTL
C_L=30pF+1TTL



1. Including scope and jig capacitance
2. R_1=3070Ω, R_2=3150Ω
3. V_{TM} =2.8V

AC CHARACTERISTICS (Vcc=3.0~3.6V)

Parameter List		Symbol	Speed Bins				Units
			55ns		70ns		
			Min	Max	Min	Max	
Read	Read Cycle Time	t_{RC}	55	-	70	-	ns
	Address Access Time	t_{AA}	-	55	-	70	ns
	Chip Select to Output	t_{CO}	-	55	-	70	ns
	Output Enable to Valid Output	t_{OE}	-	25	-	35	ns
	$\overline{UB}$, $\overline{LB}$ Access Time	t_{BA}	-	25	-	35	ns
	Chip Select to Low-Z Output	t_{LZ}	10	-	10	-	ns
	$\overline{UB}$, $\overline{LB}$ Enable to Low-Z Output	t_{BLZ}	5	-	5	-	ns
	Output Enable to Low-Z Output	t_{OLZ}	5	-	5	-	ns
	Chip Disable to High-Z Output	t_{HZ}	0	20	0	25	ns
	$\overline{UB}$, $\overline{LB}$ Disable to High-Z Output	t_{BHZ}	0	20	0	25	ns
	Output Disable to High-Z Output	t_{OHZ}	0	20	0	25	ns
	Output Hold from Address Change	t_{OH}	10	-	10	-	ns
Write	Write Cycle Time	t_{WC}	55	-	70	-	ns
	Chip Select to End of Write	t_{CW}	45	-	60	-	ns
	Address Set-up Time	t_{AS}	0	-	0	-	ns
	Address Valid to End of Write	t_{AW}	45	-	60	-	ns
	$\overline{UB}$, $\overline{LB}$ Valid to End of Write	t_{BW}	45	-	60	-	ns
	Write Pulse Width	t_{WP}	40	-	50	-	ns
	Write Recovery Time	t_{WR}	0	-	0	-	ns
	Write to Output High-Z	t_{WHZ}	0	20	0	20	ns
	Data to Write Time Overlap	t_{DW}	25	-	30	-	ns
	Data Hold from Write Time	t_{DH}	0	-	0	-	ns
	End Write to Output Low-Z	t_{OW}	5	-	5	-	ns


DATA RETENTION CHARACTERISTICS

Item	Symbol	Test Condition	Min	Typ2)	Max	Unit
Vcc for data retention	V_{DR}	$\overline{CS_1}$≥Vcc-0.2V1)	1.5	-	3.6	V
Data retention current	I_{DR}	Vcc=1.5V, $\overline{CS_1}$≥Vcc-0.2V1)	-	0.5	6	µA
Data retention set-up time	t_{SDR}	See data retention waveform	0	-	-	ns
Recovery time	t_{RDR}		tRC	-	-	


1. $\overline{CS_1}$≥Vcc-0.2V,CS_2≥Vcc-0.2V($\overline{CS_1}$ controlled) or CS_2≥Vcc-0.2V(CS_2 controlled).
2. Typical value are measured at T_A=25°C and not 100% tested.

TIMING DIAGRAMS

TIMING WAVEFORM OF READ CYCLE(1) (Address Controlled, $\overline{CS}$=$\overline{OE}$=V_{IL}, $\overline{WE}$=V_{IH}, $\overline{UB}$ or/and $\overline{LB}$=V_{IL})

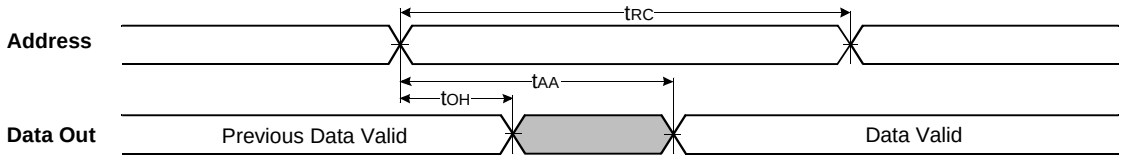


TIMING WAVEFORM OF READ CYCLE(2) ($\overline{WE}$=V_{IH})

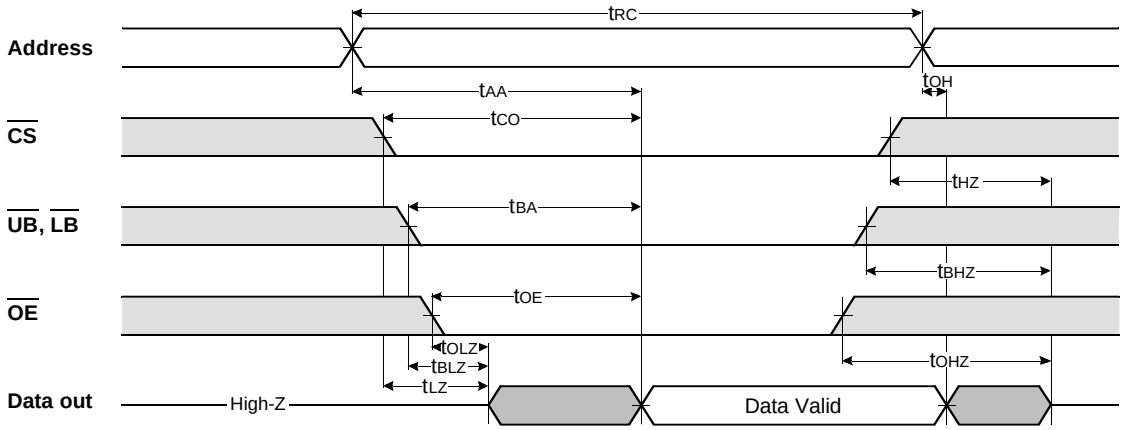


NOTES (READ CYCLE)

1. t_{HZ} and t_{OHZ} are defined as the time at which the outputs achieve the open circuit conditions and are not referenced to output voltage levels.
2. At any given temperature and voltage condition, t_{HZ}(Max.) is less than t_{LZ}(Min.) both for a given device and from device to device interconnection.


TIMING WAVEFORM OF WRITE CYCLE(1) ($\overline{WE}$ Controlled)

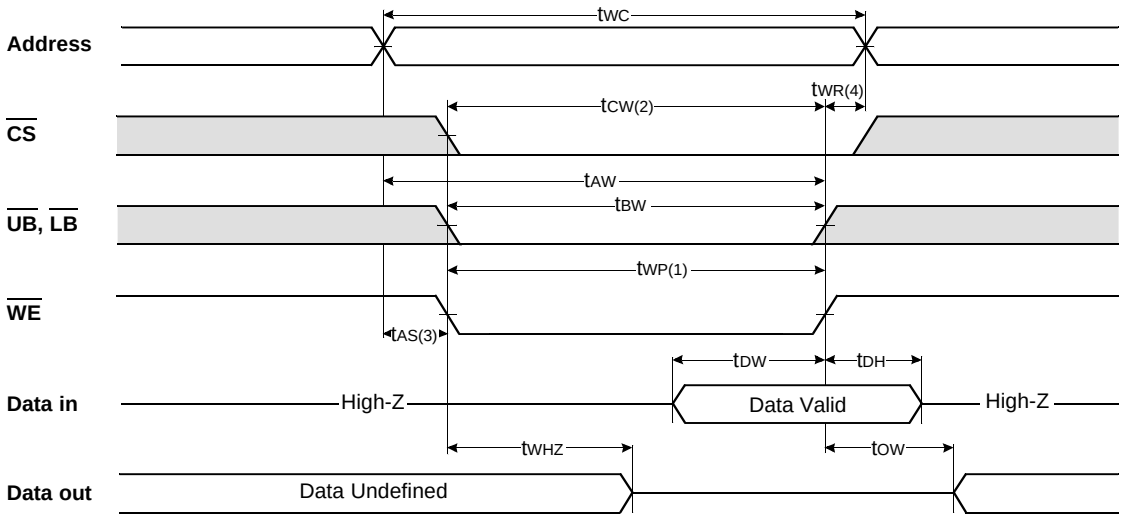

TIMING WAVEFORM OF WRITE CYCLE(2) ($\overline{CS}$ Controlled)

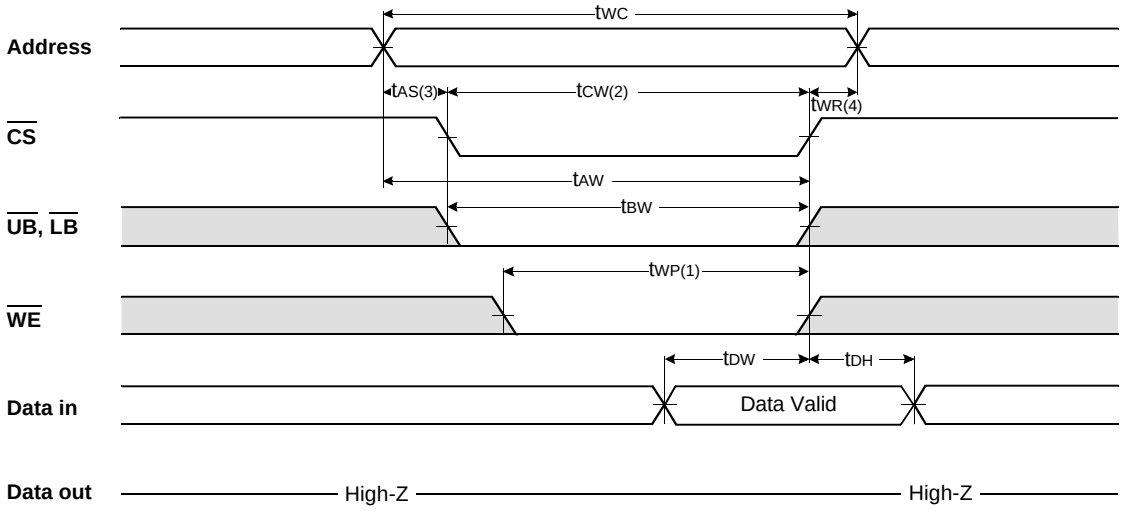

TIMING WAVEFORM OF WRITE CYCLE(3) ($\overline{UB}$, $\overline{LB}$ Controlled)

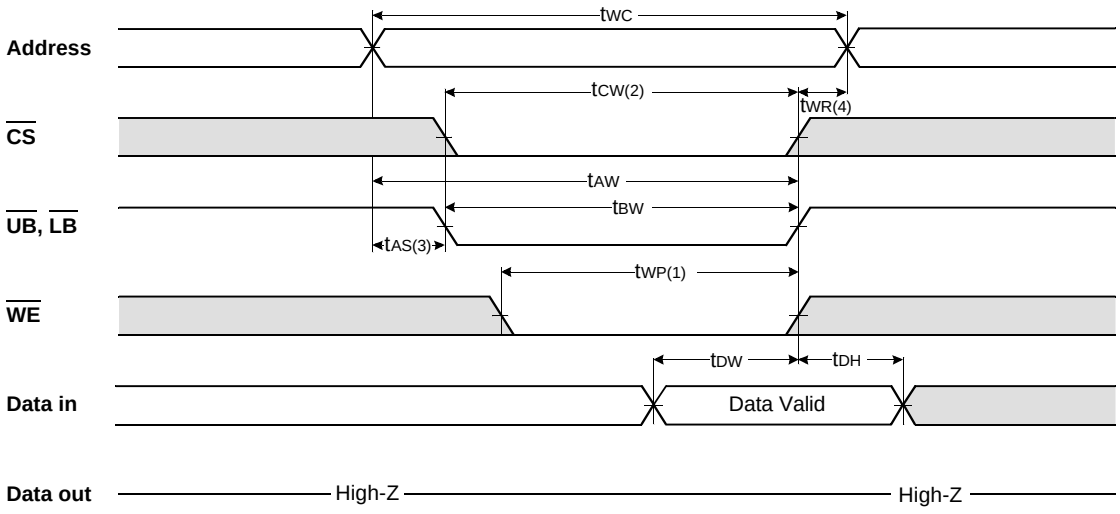


NOTES (WRITE CYCLE)

1. A write occurs during the overlap(t_{WP}) of low $\overline{CS}$ and low $\overline{WE}$. A write begins when $\overline{CS}$ goes low and $\overline{WE}$ goes low with asserting $\overline{UB}$ or $\overline{LB}$ for single byte operation or simultaneously asserting $\overline{UB}$ and $\overline{LB}$ for double byte operation. A write ends at the earliest transition when $\overline{CS}$ goes high and $\overline{WE}$ goes high. The t_{WP} is measured from the beginning of write to the end of write.
2. t_{CW} is measured from the $\overline{CS}$ going low to the end of write.
3. t_{AS} is measured from the address valid to the beginning of write.
4. t_{WR} is measured from the end of write to the address change. t_{WR} applied in case a write ends as $\overline{CS}$ or $\overline{WE}$ going high.

DATA RETENTION WAVE FORM


$\overline{CS}$ controlled

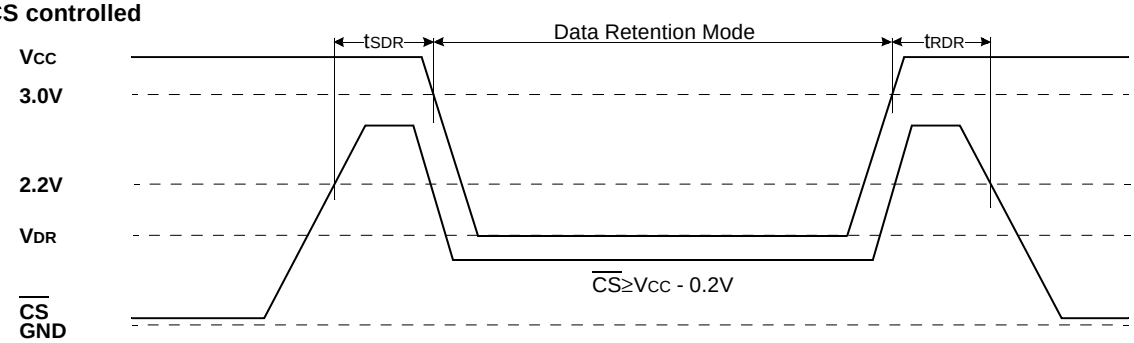

PACKAGE DIMENSION

Unit: millimeters

44 PIN THIN SMALL OUTLINE PACKAGE TYPE II (400F)

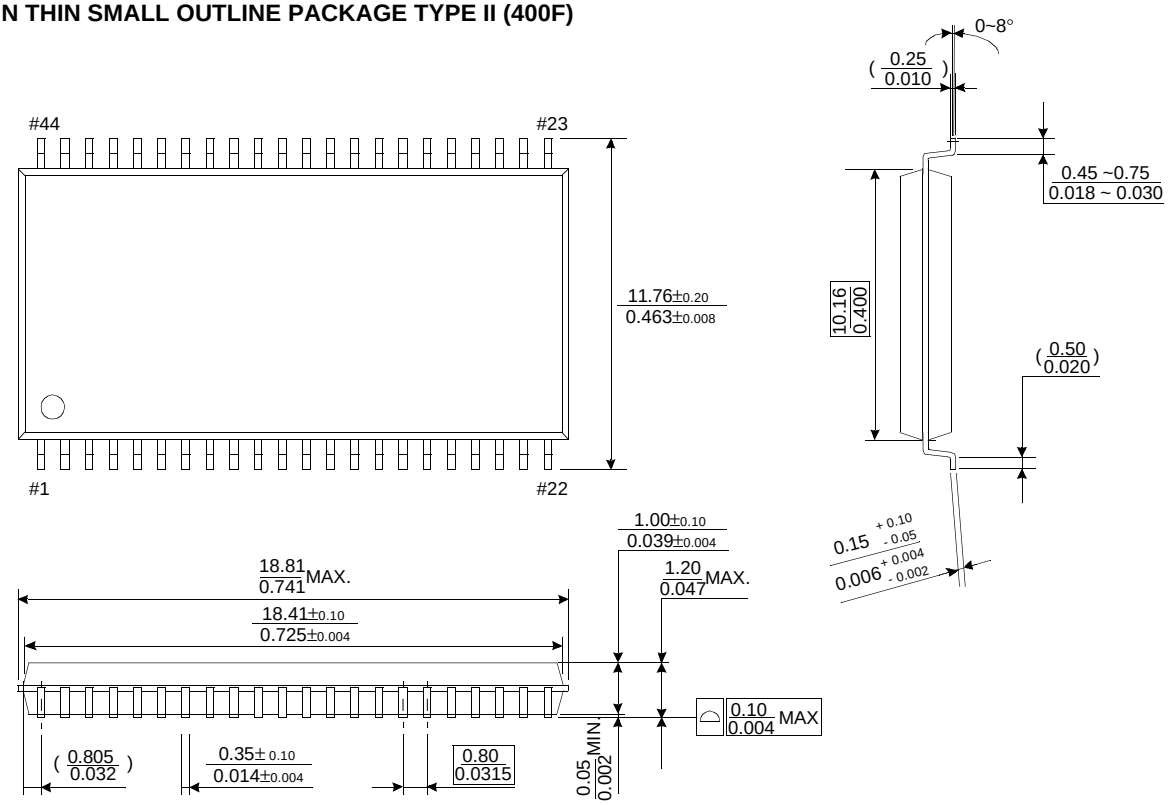

44 PIN THIN SMALL OUTLINE PACKAGE TYPE II (400R)

