



D

C




B

A


- 1 RECOMMENDED PANEL THICKNESS 1.57-2.3.
2. PANEL MUST BE PUNCHED SO THAT HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
- 3 CIRCUIT IDENTIFIERS LOCATED APPROXIMATELY AS SHOWN.
- 4 MATERIAL PA66/6 UL94-V0 COLOR-BLACK.
- 5 MATERIAL PA66 UL94-V0 GW COLOR-NATURAL.

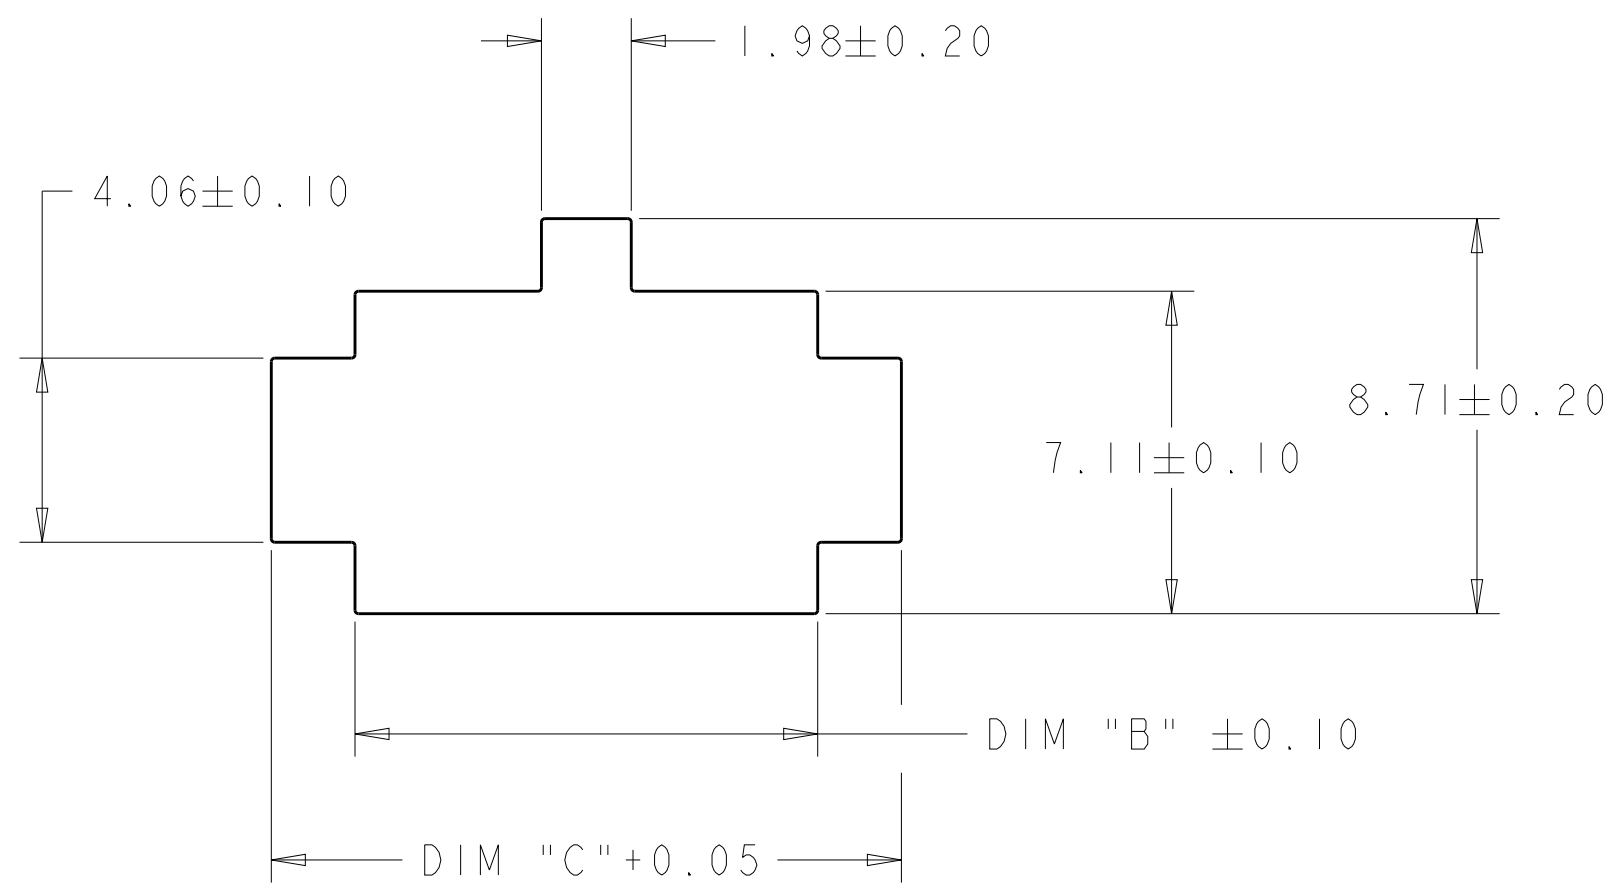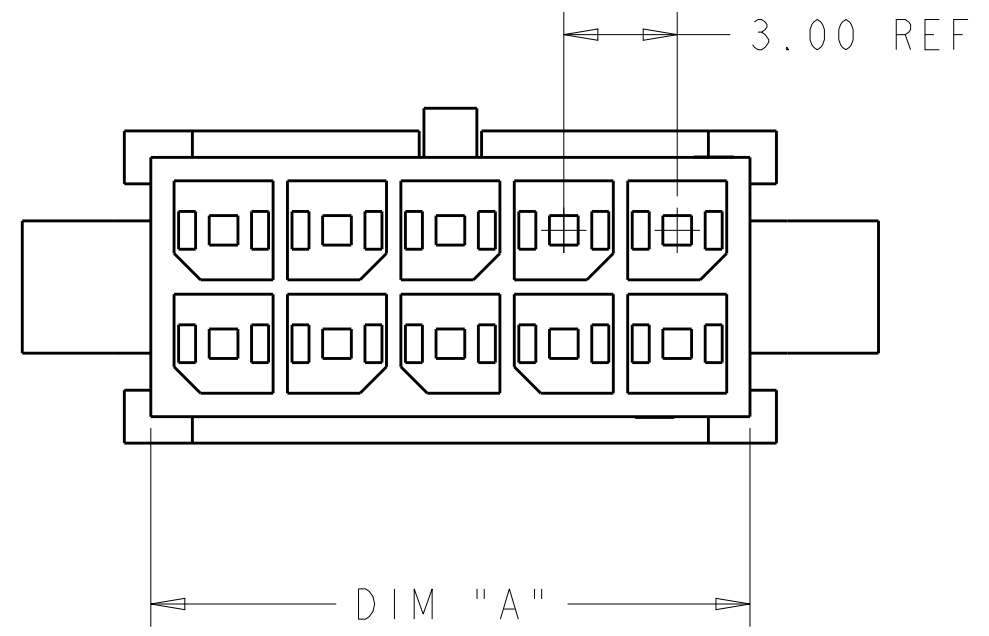

PANEL CUT-OUT 1

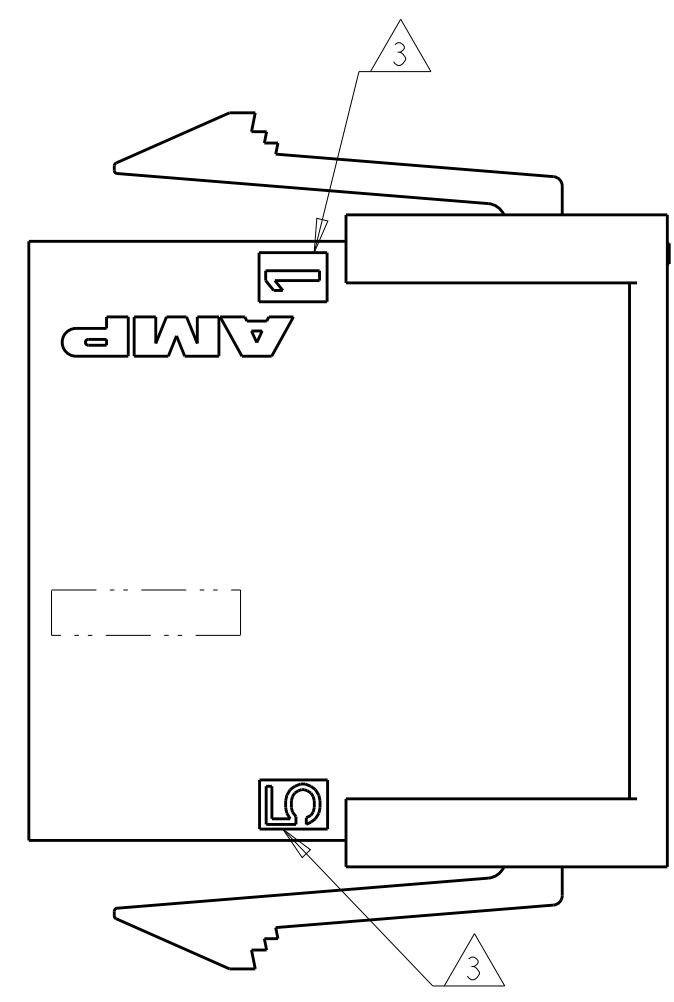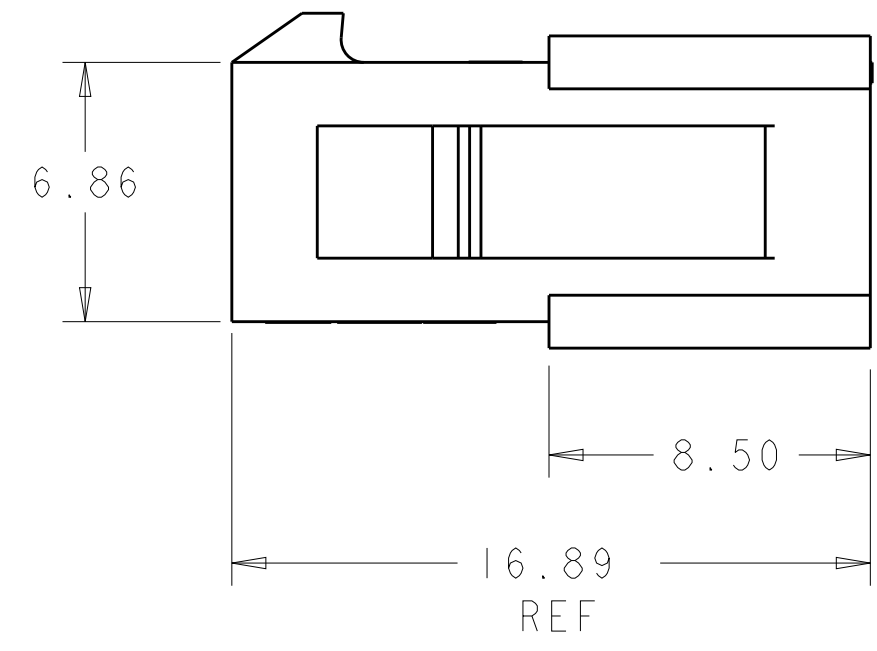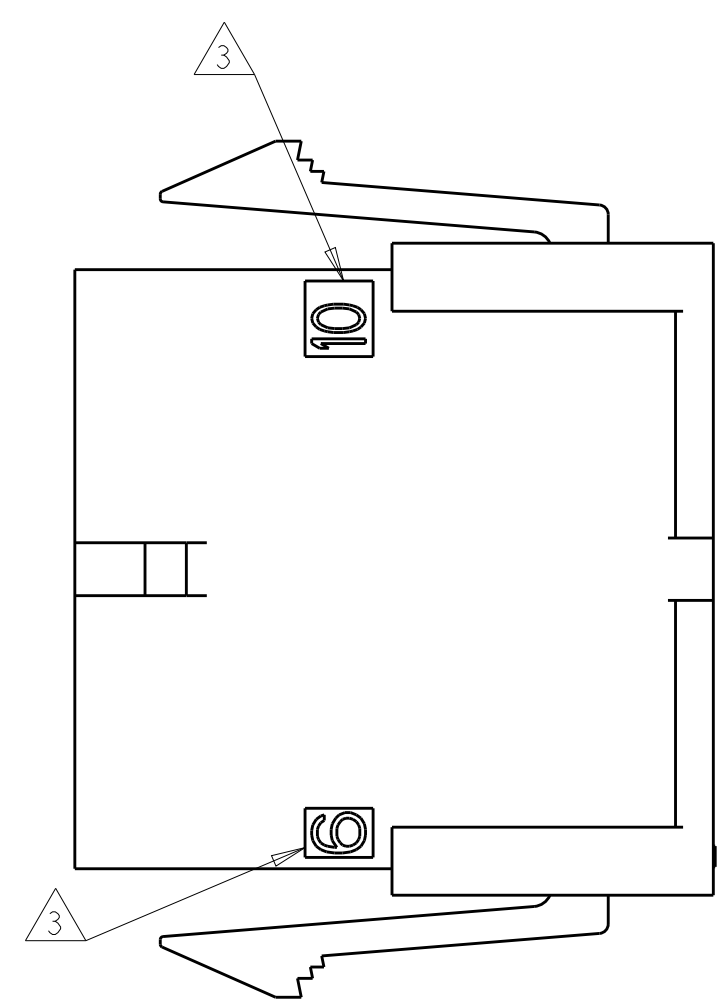

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	P6	REVISED PER ECR-18-011787	10SEP2018	JB	DZ

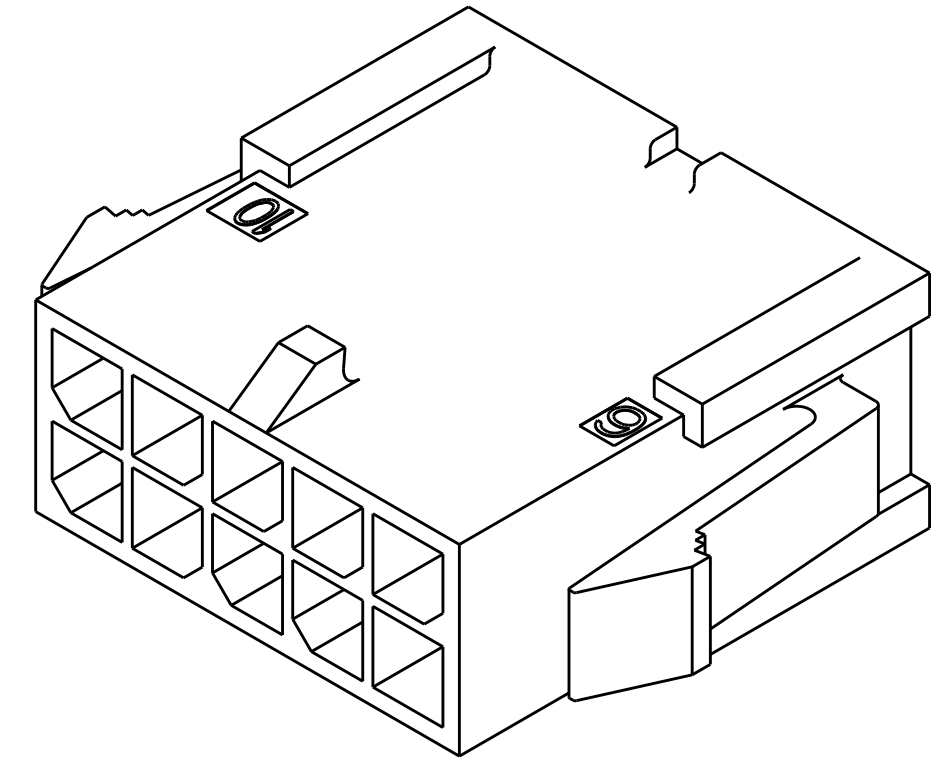

SCALE 5:1

UL-V0	19.88	16.20	15.85	10	3-794615-0
GWEPT 750°C NO FLAME 5	16.88	13.20	12.85	8	3-794615-8
GWFI 850°C NO FLAME	13.88	10.20	9.85	6	3-794615-6
OBSOLETE	10.88	7.20	6.85	4	3-794615-4
OBSOLETE	7.88	4.20	3.85	2	3-794615-2
4	40.88	37.20	36.85	24	2-794615-4
	37.88	34.20	33.85	22	2-794615-2
	34.88	31.20	30.85	20	2-794615-0
	31.88	28.20	27.85	18	1-794615-8
	28.88	25.20	24.85	16	1-794615-6
	25.88	22.20	21.85	14	1-794615-4
	22.88	19.20	18.85	12	1-794615-2
	19.88	16.20	15.85	10	1-794615-0
	16.88	13.20	12.85	8	794615-8
	13.88	10.20	9.85	6	794615-6
	10.88	7.20	6.85	4	794615-4
	7.88	4.20	3.85	2	794615-2
REMARK	DIM C	DIM B	DIM A	NO. OF POS.	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±

1 PLC ±

2 PLC ±0.13

3 PLC ±

4 PLC ±

ANGLES ±

FINISH -

DWN

W J RUDY

29AUG2000

CHK

W DAVIS

29AUG2000

APVD

W DAVIS

29AUG2000

PRODUCT SPEC

108-1836

APPLICATION SPEC

114-13000

WEIGHT

-

CUSTOMER DRAWING

TE Connectivity

NAME

PLUG HOUSING, 2 to 24 POSITION
DUAL ROW, PANEL MOUNT
MICRO MATE-N-LOK(TM)

SIZE

A2

CAGE CODE

00779

DRAWING NO

C-794615

RESTRICTED TO

SCALE

6:1

SHEET

1

OF

1

REV

P6