

Low-Power Dual Channel Digital Isolator

Check for Samples: [ISO7420FCC](#)

FEATURES

- Signaling Rate: 50 Mbps (5V Supplies)
- Output is Low in Default Mode
- Integrated Noise Filter on the Input pins
- Low Power Consumption: Typical I_{CC} per Channel
 - 1.8 mA at 1 Mbps, 3.9 mA at 25 Mbps (5V Supplies)
 - 1.4 mA at 1 Mbps, 2.6 mA at 25 Mbps (3.3V Supplies)
- Low Propagation Delay: 20 ns Typical (5V Supplies)
- Channel-to-Channel Output Skew: 2ns Maximum
- 3.3 V / 5 V Level Translation
- Wide T_A Range Specified: -40°C to 125°C
- 60 KV/ μs Transient Immunity, Typical (5V Supplies)
- Low Emissions
- Isolation Barrier Life: > 25 Years
- Operates from 2.7V to 5.5V Supply Levels
- Narrow Body SOIC-8 Package

APPLICATIONS

- Opto-Coupler Replacement in:
 - Industrial FieldBus
 - ProfiBus
 - ModBus
 - DeviceNet™ Data Buses
- Servo Control Interface
- Motor Control
- Power Supplies
- Battery Packs

SAFETY AND REGULATORY APPROVALS


- 3 KV_{RMS} / 4242 V_{PK} Isolation per DIN EN 60747-5-2 (VDE 0884 Part 2)
- 2.5 KV_{RMS} Isolation for 1 minute per UL 1577
- CSA Component Acceptance Notice #5A
- IEC 60950-1 and IEC 61010-1 End Equipment Standards
- All Agencies Approvals Pending

DESCRIPTION

ISO7420FCC provides galvanic isolation up to 2500 V_{RMS} for 1 minute per UL and 4242 V_{PK} per VDE. This device has two isolated channels. Each channel has a logic input and output buffer separated by a silicon dioxide (SiO₂) insulation barrier. Used in conjunction with isolated power supplies, this device prevents noise currents on a data bus or other circuit from entering the local ground and interfering with or damaging sensitive circuitry. The suffix F indicates low-output option in fail-safe conditions (see [Table 1](#)). This device has integrated noise filter for harsh environments where short noise pulses may be present at the device input pins.

These devices have TTL input thresholds and operate from 2.7V to 5.5V supplies. All inputs are 5V tolerant when supplied from a 2.7V or 3.3V supply.

**ISO7420
D Package
(Top View)**

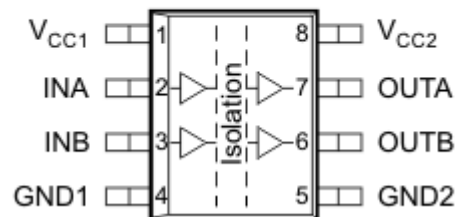

Please be aware that an important notice concerning availability, standard warranty, and use in critical applications of Texas Instruments semiconductor products and disclaimers thereto appears at the end of this data sheet.

DeviceNet is a trademark of Texas Instruments.

UNLESS OTHERWISE NOTED this document contains PRODUCTION DATA information current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

Copyright © 2013, Texas Instruments Incorporated

ISO7420FCC

SLLSED3A –JUNE 2013–REVISED JULY 2013

www.ti.com



These devices have limited built-in ESD protection. The leads should be shorted together or the device placed in conductive foam during storage or handling to prevent electrostatic damage to the MOS gates.

PIN DESCRIPTIONS

PIN		I/O	DESCRIPTION
NAME	ISO7420FCC		
INA	2	I	Input, channel A
INB	3	I	Input, channel B
GND1	4	–	Ground connection for V_{CC1}
GND2	5	–	Ground connection for V_{CC2}
OUTA	7	O	Output, channel A
OUTB	6	O	Output, channel B
V_{CC1}	1	–	Power supply, V_{CC1}
V_{CC2}	8	–	Power supply, V_{CC2}

Table 1. FUNCTION TABLE

INPUT SIDE V_{CC}	OUTPUT SIDE V_{CC}	INPUT INA, INB	OUTPUT OUTA, OUTB
PU	PU	H	H
		L	L
		Open	L ⁽¹⁾
PD	PU	X	L ⁽¹⁾
X	PD	X	Undetermined

(1) In fail-safe condition, output defaults to low level

AVAILABLE OPTIONS

PRODUCT	DATA RATE	DEFAULT OUTPUT	INTEGRATED NOISE FILTER	RATED T_A	CHANNEL DIRECTION	MARKED AS	ORDERING NUMBER
ISO7420FCC	50 Mbps	Low	Yes	–40°C to 125°C	Same	7420FC	ISO7420FCCD (rail)
							ISO7420FCCDR (reel)

ABSOLUTE MAXIMUM RATINGS⁽¹⁾

					VALUE
V _{CC1} , V _{CC2}	Supply voltage ⁽²⁾				–0.5 V to 6 V
V _I	Voltage at INA, INB				–0.5 V to 6 V
V _O	Voltage at OUTA, OUTB				–0.5 V to V _{CC} + 0.5 V
I _O	Output current				±15 mA
ESD	Electrostatic discharge	Human-body model	JEDEC Standard 22, Test Method A114-C.01	All pins	±4 kV
		Field-induced charged-device model	JEDEC Standard 22, Test Method C101		±1.5 kV
T _{J(Max)}	Maximum junction temperature				150°C
T _{std}	Storage temperature				–65°C to 150°C

- Stresses beyond those listed under *absolute maximum ratings* may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated under *recommended operating conditions* is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.
- All voltage values except differential I/O bus voltages are with respect to network ground terminal and are peak voltage values.

RECOMMENDED OPERATING CONDITIONS

			MIN	TYP	MAX	UNIT
V_{CC1}, V_{CC2}	Supply voltage		2.7		5.5	V
I_{OH}	High-level output current ($V_{CC} \geq 3.0V$)		–4			mA
	High-level output current ($V_{CC} < 3.0V$)		–2			mA
I_{OL}	Low-level output current				4	mA
V_{IH}	High-level input voltage		2		V_{CC}	V
V_{IL}	Low-level input voltage		0		0.8	V
t_{ui}	Input pulse duration	$\geq 4.5V$ -Operation	20			ns
		$< 4.5V$ -Operation	25			
$1 / t_{ui}$	Signaling rate	$\geq 4.5V$ -Operation	0		50	Mbps
		$< 4.5V$ -Operation	0		40	
$T_J^{(1)}$	Junction temperature		–40		136	°C
T_A	Ambient temperature		–40	25	125	°C

(1) To maintain the recommended operating conditions for T_J , see the [Package Thermal Characteristics](#) table.

ISO7420FCC

SLLSED3A –JUNE 2013–REVISED JULY 2013

www.ti.com

ELECTRICAL CHARACTERISTICS

V_{CC1} and $V_{CC2} = 5V \pm 10\%$, $T_A = -40^\circ C$ to $125^\circ C$

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V _{OH}	High-level output voltage	I _{OH} = −4 mA; see Figure 1 .		V _{CC2} − 0.5	4.8		V
		I _{OH} = −20 μA; see Figure 1 .		V _{CC2} − 0.1	5		
V _{OL}	Low-level output voltage	I _{OL} = 4 mA; see Figure 1 .			0.2	0.4	V
		I _{OL} = 20 μA; see Figure 1 .			0	0.1	
V _{I(HYS)}	Input threshold voltage hysteresis				450		mV
I _{IH}	High-level input current	I _{Nx} = V _{CC}				10	μA
I _{IL}	Low-level input current	I _{Nx} = 0 V		−10			μA
CMTI	Common-mode transient immunity	V _I = V _{CC} or 0 V; see Figure 3 .		25	60		kV/μs
SUPPLY CURRENT (All inputs switching with square wave clock signal for dynamic I _{CC} measurement)							
I _{CC1}	Supply current for V _{CC1} and V _{CC2}	DC to 1 Mbps	DC Input: V _I = V _{CC} or 0 V, AC Input: C _L = 15pF		0.5	1.1	mA
I _{CC2}					3	4.6	
I _{CC1}		10 Mbps	C _L = 15pF		1	1.5	
I _{CC2}					4	6	
I _{CC1}		25 Mbps			1.7	2.5	
I _{CC2}					6	8.5	
I _{CC1}		50 Mbps			2.7	4	
I _{CC2}					8.5	12	

SWITCHING CHARACTERISTICS

V_{CC1} and $V_{CC2} = 5V \pm 10\%$, $T_A = -40^\circ C$ to $125^\circ C$

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}, t_{PHL}	Propagation delay time	See Figure 1 .	10	20	37	ns
PWD ⁽¹⁾	Pulse width distortion $ t_{PHL} - t_{PLH} $			2.5	5	ns
$t_{sk(o)}$ ⁽²⁾	Channel-to-channel output skew time				2	ns
$t_{sk(pp)}$ ⁽³⁾	Part-to-part skew time				12	ns
t_r	Output signal rise time	See Figure 1 .		2.5		ns
t_f	Output signal fall time			2.5		ns
t_{GS}	Pulse width of glitches suppressed by the input filter			12		ns
t_{fs}	Fail-safe output delay time from input data or power loss	See Figure 2 .		8		μs

- (1) Also known as pulse skew.
- (2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
- (3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

ELECTRICAL CHARACTERISTICS

 V_{CC1} and $V_{CC2} = 3.3\text{ V} \pm 10\%$, $T_A = -40^\circ\text{C}$ to 125°C

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V _{OH}	High-level output voltage	I _{OH} = −4 mA; see Figure 1 .		V _{CC2} − 0.5	3		V
		I _{OH} = −20 μA; see Figure 1 .		V _{CC2} − 0.1	3.3		
V _{OL}	Low-level output voltage	I _{OL} = 4 mA; see Figure 1 .			0.2	0.4	V
		I _{OL} = 20 μA; see Figure 1 .			0	0.1	
V _{I(HYS)}	Input threshold voltage hysteresis				425		mV
I _{IH}	High-level input current	INx = V _{CC}				10	μA
I _{IL}	Low-level input curre	INx = 0 V		−10			μA
CMTI	Common-mode transient immunity	V _I = V _{CC} or 0 V; see Figure 3 .		25	40		kV/μs
SUPPLY CURRENT (All inputs switching with square wave clock signal for dynamic I _{CC} measurement)							
I _{CC1}	Supply current for V _{CC1} and V _{CC2}	DC to 1 Mbps	DC Input: V _I = V _{CC} or 0 V, AC Input: C _L = 15pF		0.3	0.8	mA
I _{CC2}					2.4	3.3	
I _{CC1}		10 Mbps	C _L = 15pF		0.6	1.2	
I _{CC2}					3.1	4.5	
I _{CC1}		25 Mbps			1	2	
I _{CC2}					4.2	6.1	
I _{CC1}		40 Mbps			1.3	2.3	
I _{CC2}					5.3	7.5	

SWITCHING CHARACTERISTICS

 V_{CC1} and $V_{CC2} = 3.3\text{ V} \pm 10\%$, $T_A = -40^\circ\text{C}$ to 125°C

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}, t_{PHL}	Propagation delay time	See Figure 1 .	10	22	40	ns
PWD ⁽¹⁾	Pulse width distortion $ t_{PHL} - t_{PLH} $				3	ns
$t_{sk(o)}$ ⁽²⁾	Channel-to-channel output skew time				2	ns
$t_{sk(pp)}$ ⁽³⁾	Part-to-part skew time				19	ns
t_r	Output signal rise time	See Figure 1 .		3		ns
t_f	Output signal fall time			3		ns
t_{GS}	Pulse width of glitches suppressed by the input filter			12.5		ns
t_{fs}	Fail-safe output delay time from input power loss	See Figure 2 .		8		μs

(1) Also known as pulse skew.

(2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.

(3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

ISO7420FCC

SLLSED3A –JUNE 2013–REVISED JULY 2013

www.ti.com

ELECTRICAL CHARACTERISTICS

 V_{CC1} and $V_{CC2} = 2.7\text{ V}$, $T_A = -40^\circ\text{C}$ to 125°C

PARAMETER		TEST CONDITIONS		MIN	TYP	MAX	UNIT
V _{OH}	High-level output voltage	I _{OH} = −2 mA; see Figure 1 .		V _{CC2} − 0.3	2.5		V
		I _{OH} = −20 μA; see Figure 1 .		V _{CC2} − 0.1	2.7		
V _{OL}	Low-level output voltage	I _{OL} = 4 mA; see Figure 1 .			0.2	0.4	V
		I _{OL} = 20 μA; see Figure 1 .			0	0.1	
V _{I(HYS)}	Input threshold voltage hysteresis				350		mV
I _{IH}	High-level input current	I _{Nx} = V _{CC}				10	μA
I _{IL}	Low-level input current	I _{Nx} = 0 V		−10			μA
CMTI	Common-mode transient immunity	V _I = V _{CC} or 0 V; see Figure 3 .		25	35		kV/μs
SUPPLY CURRENT (All inputs switching with square wave clock signal for dynamic I _{CC} measurement)							
I _{CC1}	Supply current for V _{CC1} and V _{CC2}	DC to 1 Mbps	DC Input: V _I = V _{CC} or 0 V, AC Input: C _L = 15pF		0.15	0.4	mA
I _{CC2}					2.1	3.1	
I _{CC1}		10 Mbps	C _L = 15pF		0.4	0.7	
I _{CC2}					2.7	4	
I _{CC1}		25 Mbps			0.7	1.2	
I _{CC2}					3.6	5	
I _{CC1}		40 Mbps		1	1.7		
I _{CC2}				4.4	6.3		


SWITCHING CHARACTERISTICS

 V_{CC1} and $V_{CC2} = 2.7\text{ V}$, $T_A = -40^\circ\text{C}$ to 125°C

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
t_{PLH}, t_{PHL}	Propagation delay time	See Figure 1.	15	26	45	ns
PWD ⁽¹⁾	Pulse width distortion $ t_{PHL} - t_{PLH} $				3	ns
$t_{sk(o)}$ ⁽²⁾	Channel-to-channel output skew time				2	ns
$t_{sk(pp)}$ ⁽³⁾	Part-to-part skew time				22	ns
t_r	Output signal rise time	See Figure 1.		3		ns
t_f	Output signal fall time			3		ns
t_{GS}	Pulse width of glitches suppressed by the input filter			13.5		ns
t_{fs}	Fail-safe output delay time from input power loss	See Figure 2.		8		μs


- (1) Also known as pulse skew.
- (2) $t_{sk(o)}$ is the skew between outputs of a single device with all driving inputs connected together and the outputs switching in the same direction while driving identical loads.
- (3) $t_{sk(pp)}$ is the magnitude of the difference in propagation delay times between any terminals of different devices switching in the same direction while operating at identical supply voltages, temperature, input signals and loads.

PARAMETER MEASUREMENT INFORMATION

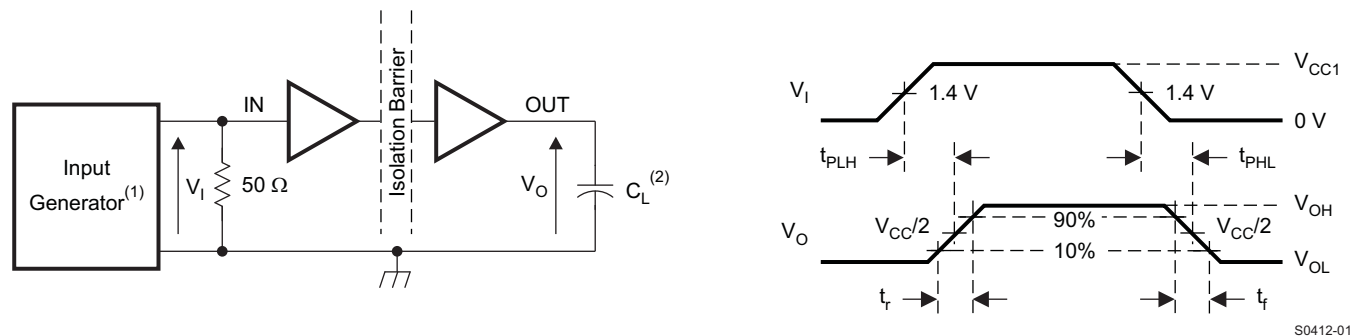


- (1) The input pulse is supplied by a generator having the following characteristics: PRR $\leq$ 50 kHz, 50% duty cycle, $t_r \leq 3$ ns, $t_f \leq 3$ ns, $Z_O = 50 \Omega$. At the input, a 50-Ω resistor is required to terminate the Input Generator signal. It is not needed in actual application.
- (2) $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 1. Switching Characteristic Test Circuit and Voltage Waveforms

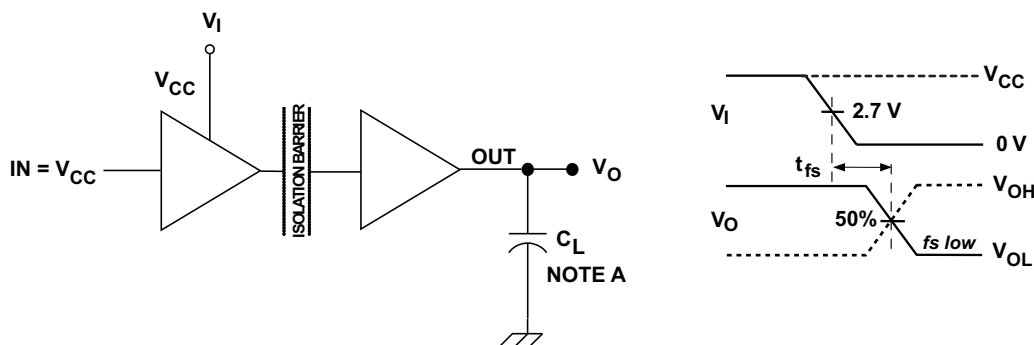

- A. $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 2. Fail-Safe Output Delay-Time Test Circuit and Voltage Waveforms

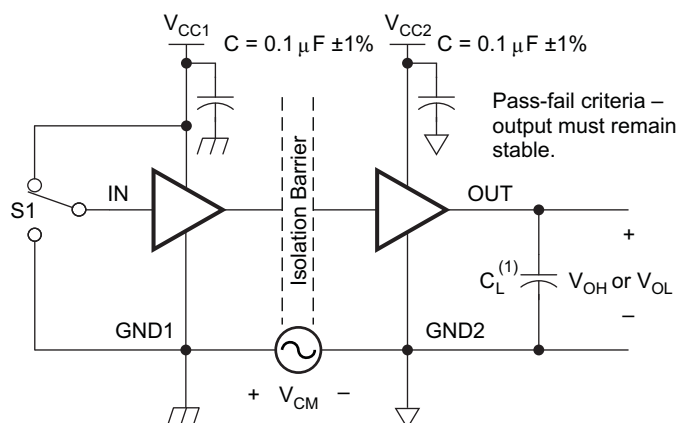

- (1) $C_L = 15$ pF and includes instrumentation and fixture capacitance within $\pm 20\%$.

Figure 3. Common-Mode Transient Immunity Test Circuit

DEVICE INFORMATION

IEC Insulation and Safety-Related Specifications for D-8 Package

over recommended operating conditions (unless otherwise noted)

PARAMETER		TEST CONDITIONS	MIN	TYP	MAX	UNIT
L(I01)	Minimum air gap (clearance)	Shortest terminal-to-terminal distance through air	4			mm
L(I02)	Minimum external tracking (creepage)	Shortest terminal-to-terminal distance across the package surface	4			mm
CTI	Tracking resistance (comparative tracking index)	DIN IEC 60112 / VDE 0303 Part 1	>400			V
	Minimum internal gap (internal clearance)	Distance through the insulation	0.014			mm
R _{IO}	Isolation resistance, input to output ⁽¹⁾	V _{IO} = 500 V, T _A < 100°C	>10 ¹²			Ω
		V _{IO} = 500 V, 100°C ≤ T _A ≤ max	>10 ¹¹			Ω
C _{IO}	Barrier capacitance, input to output ⁽¹⁾	V _{IO} = 0.4 sin (2πft), f = 1 MHz		1		pF
C _I	Input capacitance ⁽²⁾	V _I = V _{CC} /2 + 0.4 sin (2πft), f = 1 MHz, V _{CC} = 5 V		1		pF

(1) All pins on each side of the barrier tied together creating a two-terminal device.

(2) Measured from input pin to ground.

NOTE

Creepage and clearance requirements should be applied according to the specific equipment isolation standards of an application. Care should be taken to maintain the creepage and clearance distance of a board design to ensure that the mounting pads of the isolator on the printed-circuit board do not reduce this distance.

Creepage and clearance on a printed-circuit board become equal in certain cases. Techniques such as inserting grooves and/or ribs on a printed circuit board are used to help increase these specifications.

INSULATION CHARACTERISTICS

over recommended operating conditions (unless otherwise noted)

PARAMETER ⁽¹⁾		TEST CONDITIONS	SPECIFICATION	UNIT
V _{IORM}	Maximum working insulation voltage		566	V _{PEAK}
V _{PR}	Input-to-output test voltage per DIN EN 60747-5-2	Method a, After environmental tests subgroup 1, V _{PR} = V _{IORM} × 1.6, t = 10 s, Partial Discharge < 5 pC	906	V _{PEAK}
		Method b1, V _{PR} = V _{IORM} × 1.875, t = 1 s (100% Production test) Partial discharge < 5 pC	1062	
		After Input/Output safety test subgroup 2/3, V _{PR} = V _{IORM} × 1.2, t = 10 s, Partial discharge < 5 pC	680	
V _{IOTM}	Transient overvoltage per DIN EN 60747-5-2	V _{TEST} = V _{IOTM} t = 60 sec (qualification) t = 1 sec (100% production)	4242	V _{PEAK}
V _{ISO}	Isolation voltage per UL 1577	V _{TEST} = V _{ISO} , t = 60 sec (qualification)	2500	V _{RMS}
		V _{TEST} = 1.2 × V _{ISO} , t = 1 sec (100% production)	3000	
R _S	Insulation resistance	V _{IO} = 500 V at T _S	>10 ⁹	Ω
	Pollution degree		2	

(1) Climatic Classification 40/125/21

Table 2. IEC 60664-1 RATINGS TABLE

PARAMETER	TEST CONDITIONS	SPECIFICATION
Basic isolation group	Material group	II
Installation classification	Rated mains voltage $\leq 150 V_{RMS}$	I–IV
	Rated mains voltage $\leq 300 V_{RMS}$	I–III
	Rated mains voltage $\leq 400 V_{RMS}$	I–II

REGULATORY INFORMATION

VDE	CSA	UL
Certified according to DIN EN 60747-5-2 (VDE 0884 Part 2)	Approved under CSA Component Acceptance Notice #5A	Recognized under UL 1577 Component Recognition Program
Basic Insulation Maximum Transient Overvoltage, 4242 V_{PK} Maximum Working Voltage, 566 V_{PK}	Basic and Reinforced Insulation per CSA 60950-1 and IEC 60950-1 Reinforced Insulation per CSA 61010-1 and IEC 61010-1	Single / Basic Isolation Voltage, 2500 V_{RMS} ⁽¹⁾
File number: 40016131 (Approval pending)	File number: 220991 (Approval pending)	File number: E181974 (Approval pending)

(1) Production tested $\geq 3000 V_{RMS}$ for 1 second in accordance with UL 1577.

IEC SAFETY LIMITING VALUES

Safety limiting intends to prevent potential damage to the isolation barrier upon failure of input or output circuitry. A failure of the I/O can allow low resistance to ground or the supply and, without current limiting, dissipate sufficient power to overheat the die and damage the isolation barrier, potentially leading to secondary system failures.

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
I_S Safety input, output, or supply current	$\theta_{JA} = 115.1^\circ\text{C/W}$, $V_I = 5.5\text{ V}$, $T_J = 150^\circ\text{C}$, $T_A = 25^\circ\text{C}$			197	mA
	$\theta_{JA} = 115.1^\circ\text{C/W}$, $V_I = 3.6\text{ V}$, $T_J = 150^\circ\text{C}$, $T_A = 25^\circ\text{C}$			302	
	$\theta_{JA} = 115.1^\circ\text{C/W}$, $V_I = 2.7\text{ V}$, $T_J = 150^\circ\text{C}$, $T_A = 25^\circ\text{C}$			402	
T_S Maximum case temperature				150	$^\circ\text{C}$

The safety-limiting constraint is the absolute-maximum junction temperature specified in the *Absolute Maximum Ratings* table. The power dissipation and junction-to-air thermal impedance of the device installed in the application hardware determines the junction temperature. The assumed junction-to-air thermal resistance in the *Thermal Information* table is that of a device installed on a High-K Test Board for Leaded Surface-Mount Packages. The power is the recommended maximum input voltage times the current. The junction temperature is then the ambient temperature plus the power times the junction-to-air thermal resistance.

PACKAGE THERMAL CHARACTERISTICS

(over recommended operating conditions unless otherwise noted)

THERMAL METRIC ⁽¹⁾			ISO7420	UNITS
			D PACKAGE	
			(8) PINS	
θ_{JA}	Junction-to-ambient thermal resistance		115.1	$^\circ\text{C/W}$
θ_{JCTop}	Junction-to-case (top) thermal resistance		60.1	
θ_{JB}	Junction-to-board thermal resistance		56.4	
ψ_{JT}	Junction-to-top characterization parameter		17.2	
ψ_{JB}	Junction-to-board characterization parameter		55.8	
θ_{JCbott}	Junction-to-case (bottom) thermal resistance		N/A	
P_D	Device power dissipation	$V_{CC1} = V_{CC2} = 5.5\text{ V}$, $T_J = 150^\circ\text{C}$, $C_L = 15\text{ pF}$, Input a 50-Mbps 50% duty-cycle square wave	120	mW

(1) For more information about traditional and new thermal metrics, see the IC Package Thermal Metrics application report, [SPRA953](#).

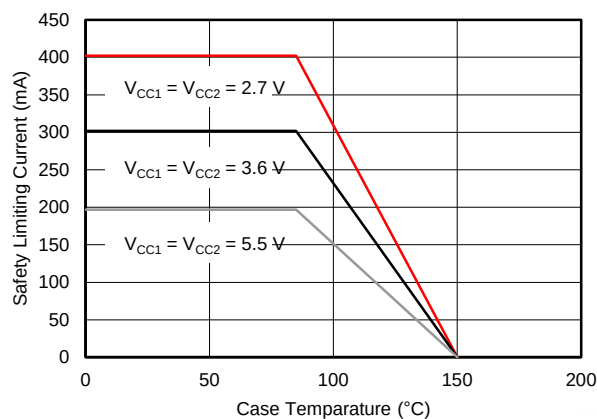


Figure 4. θ_{JC} Thermal Derating Curve per DIN EN 60747-5-2

APPLICATION INFORMATION

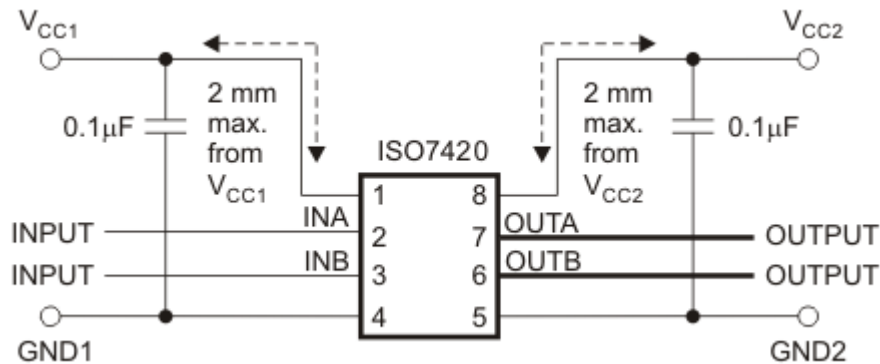


Figure 5. Typical ISO7420FCC Application Circuit

Note: For detailed layout recommendations, see Application Note [SLLA284](#), *Digital Isolator Design Guide*.

SUPPLY CURRENT EQUATIONS

Maximum Supply Current Equations

(Calculated over recommended operating temperature range and Silicon process variation)

At $V_{CC1} = V_{CC2} = 5V \pm 10\%$

$$I_{CC1}(\text{max}) = 1.1 + 5.80E-02 \times f$$

$$I_{CC2}(\text{max}) = 4.6 + 6.55E-02 \times f + 5.5E-03 \times f \times C_L$$

At $V_{CC1} = V_{CC2} = 3.3V \pm 10\%$

$$I_{CC1}(\text{max}) = 0.8 + 3.40E-02 \times f$$

$$I_{CC2}(\text{max}) = 3.3 + 4.60E-02 \times f + 3.6E-03 \times f \times C_L$$

At $V_{CC1} = V_{CC2} = 2.7V$

$$I_{CC1}(\text{max}) = 0.4 + 3.20E-02 \times f$$

$$I_{CC2}(\text{max}) = 3.1 + 3.75E-02 \times f + 2.7E-03 \times f \times C_L$$

f is data rate of each channel measured in Mbps; C_L is the capacitive load of each channel measured in pF; $I_{CC1}(\text{max})$ and $I_{CC2}(\text{max})$ are measured in mA.

Typical Supply Current Equations

(Calculated for $T_A = 25^\circ\text{C}$ and nominal Silicon process material)

At $V_{CC1} = V_{CC2} = 5V$

$$I_{CC1}(\text{typ}) = 0.5 + 4.40E-02 \times f$$

$$I_{CC2}(\text{typ}) = 3 + 3.50E-02 \times f + 5.0E-03 \times f \times C_L$$

At $V_{CC1} = V_{CC2} = 3.3V$

$$I_{CC1}(\text{typ}) = 0.3 + 2.60E-02 \times f$$

$$I_{CC2}(\text{typ}) = 2.4 + 2.25E-02 \times f + 3.3E-03 \times f \times C_L$$

At $V_{CC1} = V_{CC2} = 2.7V$

$$I_{CC1}(\text{typ}) = 0.15 + 2.10E-02 \times f$$

$$I_{CC2}(\text{typ}) = 2.1 + 1.75E-02 \times f + 2.7E-03 \times f \times C_L$$

f is Data Rate of each channel measured in Mbps; C_L is the Capacitive Load of each channel measured in pF; $I_{CC1}(\text{typ})$ and $I_{CC2}(\text{typ})$ are measured in mA.

ISO7420FCC

SLLSED3A –JUNE 2013–REVISED JULY 2013

www.ti.com

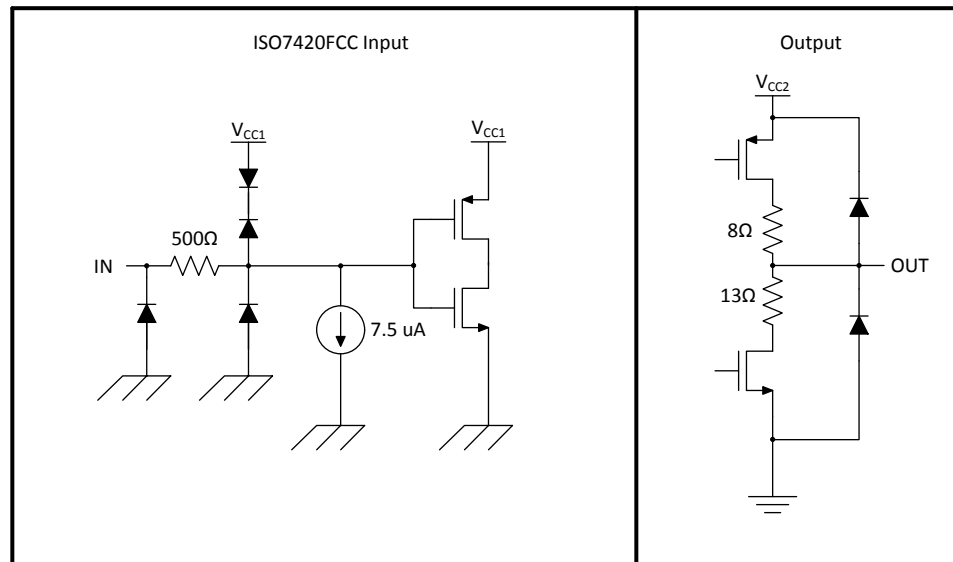


Figure 6. Device I/O Schematics

TYPICAL CHARACTERISTICS

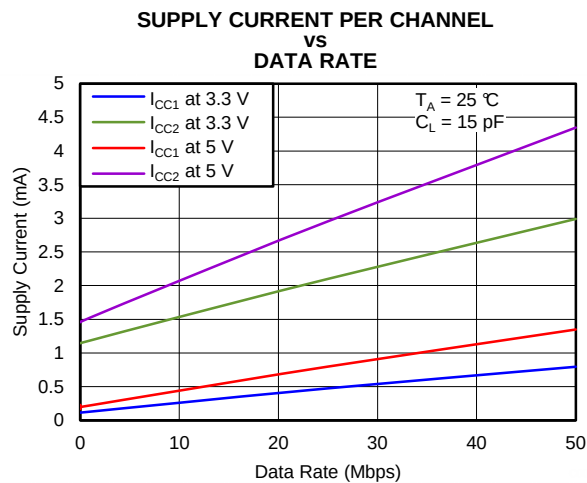


Figure 7.

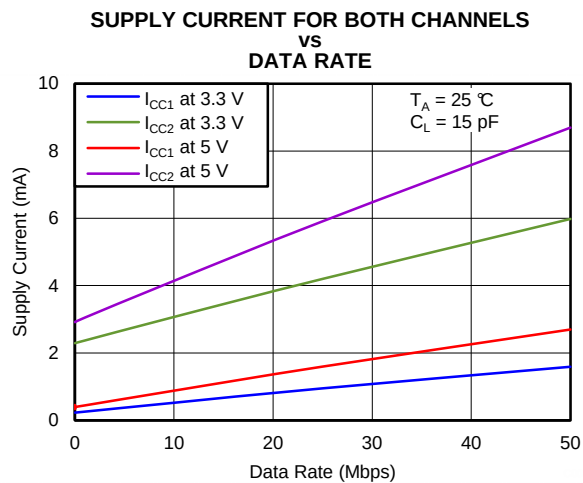


Figure 8.

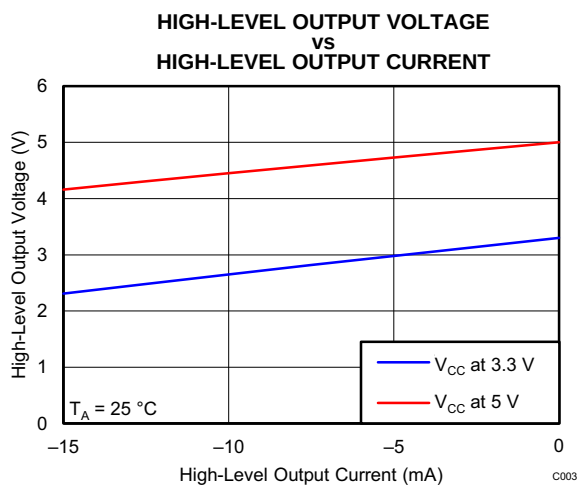


Figure 9.

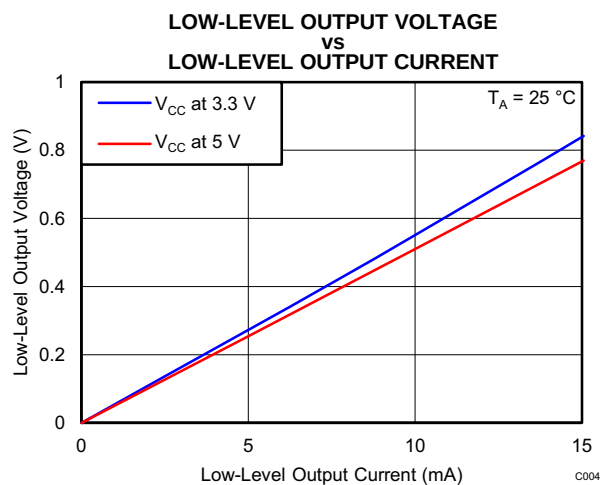


Figure 10.

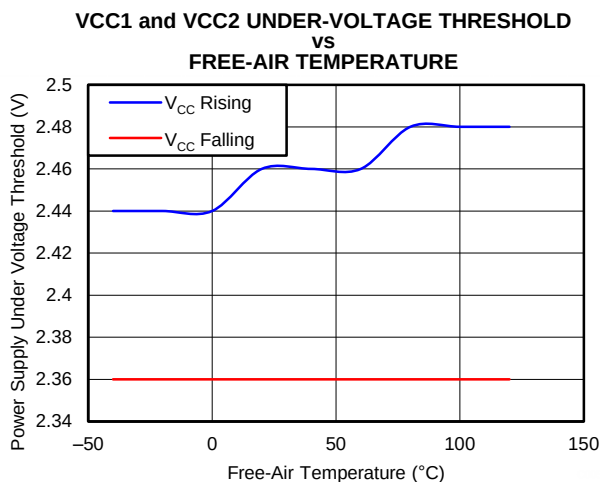


Figure 11.

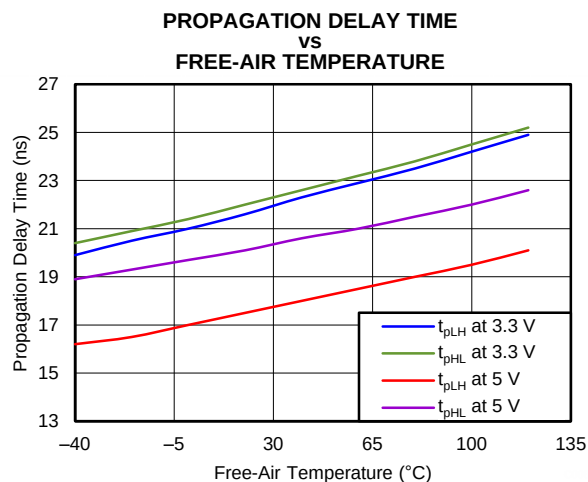


Figure 12.

TYPICAL CHARACTERISTICS (continued)

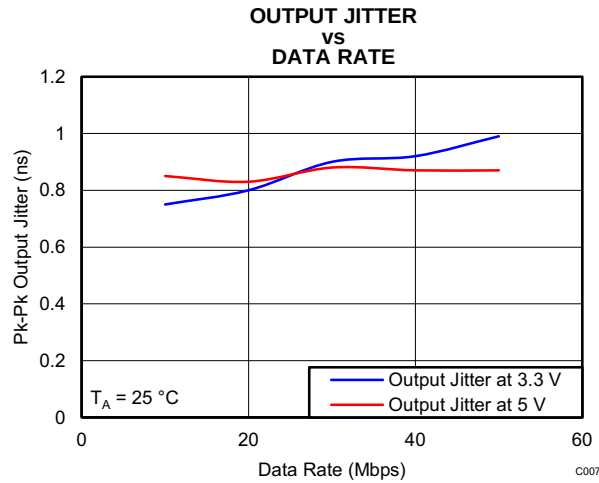


Figure 13.

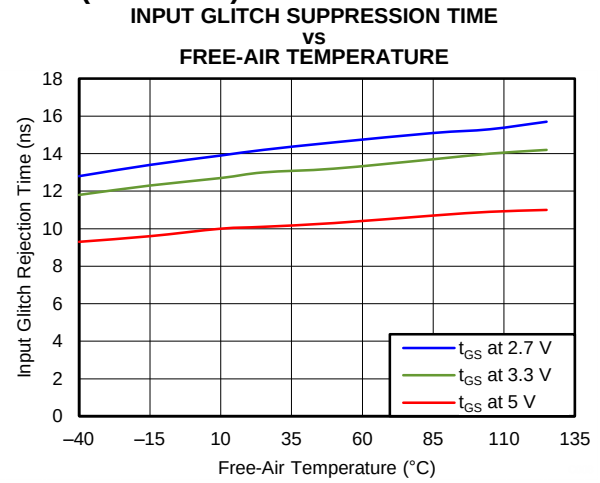


Figure 14.

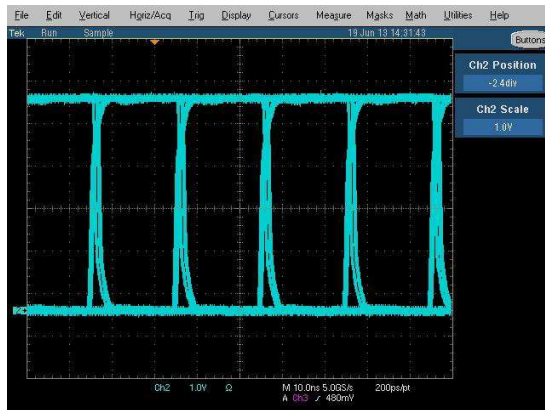


Figure 15. Eye Diagram at 50 Mbps, 5V at 25°C

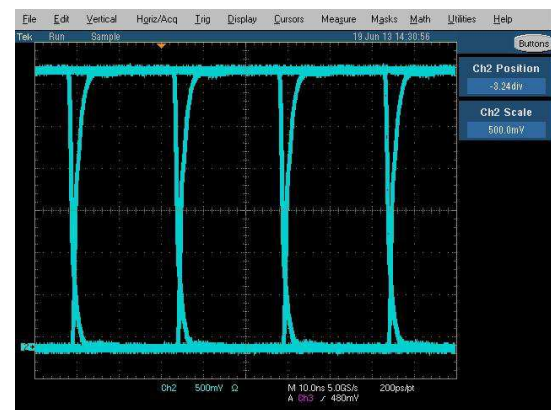


Figure 16. Eye Diagram at 40 Mbps, 3.3V at 25°C

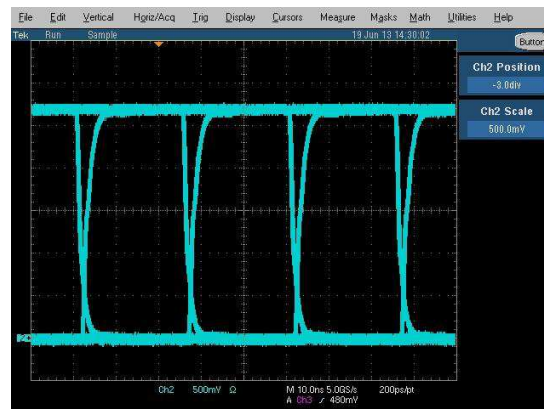


Figure 17. Eye Diagram at 40 Mbps, 2.7V at 25°C

REVISION HISTORY

Changes from Original (June 2013) to Revision A	Page
• Changed High-level output voltage MIN Value From: V_{CCx} To: V_{CC2}	4
• Changed High-level output voltage MIN Value From: V_{CCx} To: V_{CC2} and removed Note 1	5
• Changed High-level output voltage MIN Value From: V_{CCx} To: V_{CC2} and removed Note 1	6
• Changed Figure 9 X axis values	13

PACKAGING INFORMATION

Orderable Device	Status (1)	Package Type	Package Drawing	Pins	Package Qty	Eco Plan (2)	Lead/Ball Finish	MSL Peak Temp (3)	Op Temp (°C)	Device Marking (4/5)	Samples
ISO7420FCCD	ACTIVE	SOIC	D	8	75	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	7420FC	Samples
ISO7420FCCDR	ACTIVE	SOIC	D	8	2500	Green (RoHS & no Sb/Br)	CU NIPDAU	Level-2-260C-1 YEAR	-40 to 85	7420FC	Samples

(1) The marketing status values are defined as follows:

ACTIVE: Product device recommended for new designs.

LIFEBUY: TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

NRND: Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

PREVIEW: Device has been announced but is not in production. Samples may or may not be available.

OBSOLETE: TI has discontinued the production of the device.

(2) Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

TBD: The Pb-Free/Green conversion plan has not been defined.

Pb-Free (RoHS): TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

Pb-Free (RoHS Exempt): This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

Green (RoHS & no Sb/Br): TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)


(3) MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

(4) There may be additional marking, which relates to the logo, the lot trace code information, or the environmental category on the device.

(5) Multiple Device Markings will be inside parentheses. Only one Device Marking contained in parentheses and separated by a "-" will appear on a device. If a line is indented then it is a continuation of the previous line and the two combined represent the entire Device Marking for that device.

Important Information and Disclaimer: The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.


In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

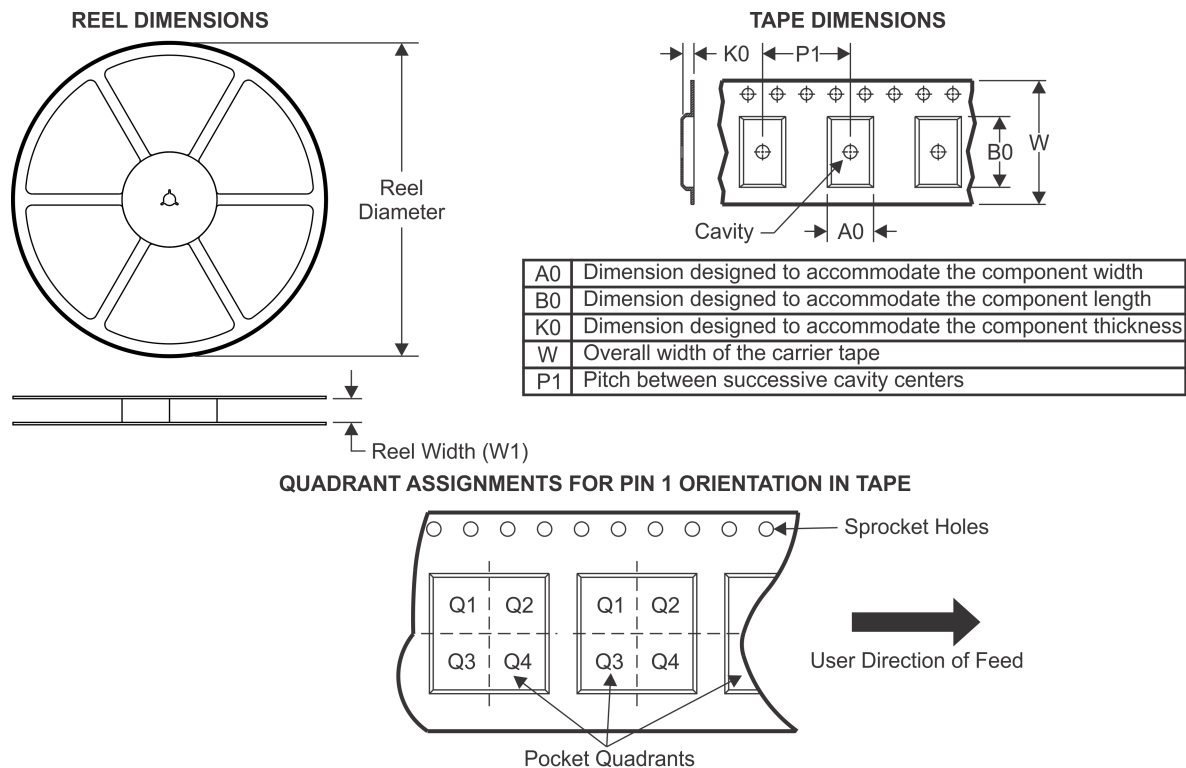TAPE AND REEL INFORMATION


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Reel Diameter (mm)	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P1 (mm)	W (mm)	Pin1 Quadrant
ISO7420FCCDR	SOIC	D	8	2500	330.0	12.4	6.4	5.2	2.1	8.0	12.0	Q1

TAPE AND REEL BOX DIMENSIONS

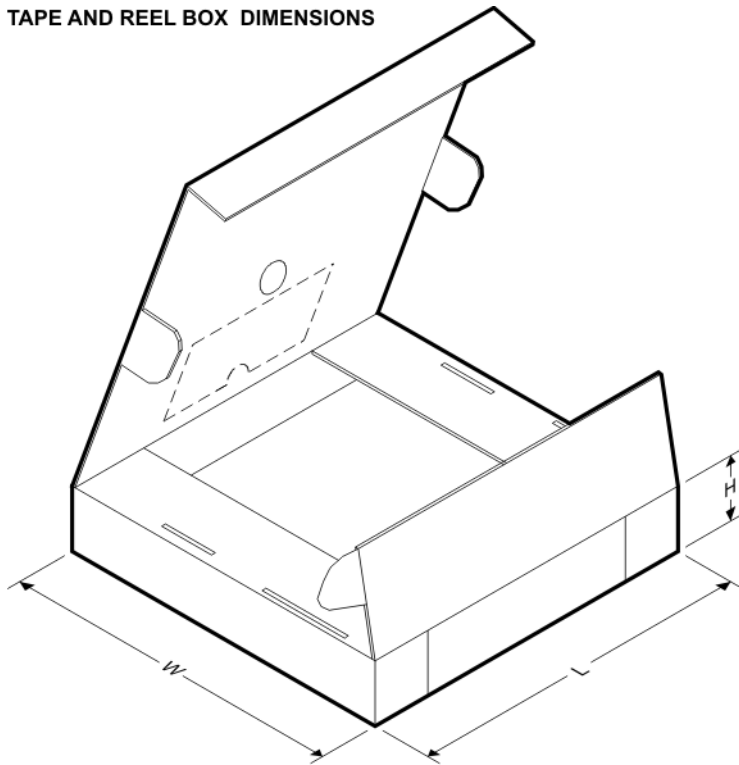


*All dimensions are nominal

Device	Package Type	Package Drawing	Pins	SPQ	Length (mm)	Width (mm)	Height (mm)
ISO7420FCCDR	SOIC	D	8	2500	367.0	367.0	35.0

D (R-PDSO-G8)


PLASTIC SMALL OUTLINE

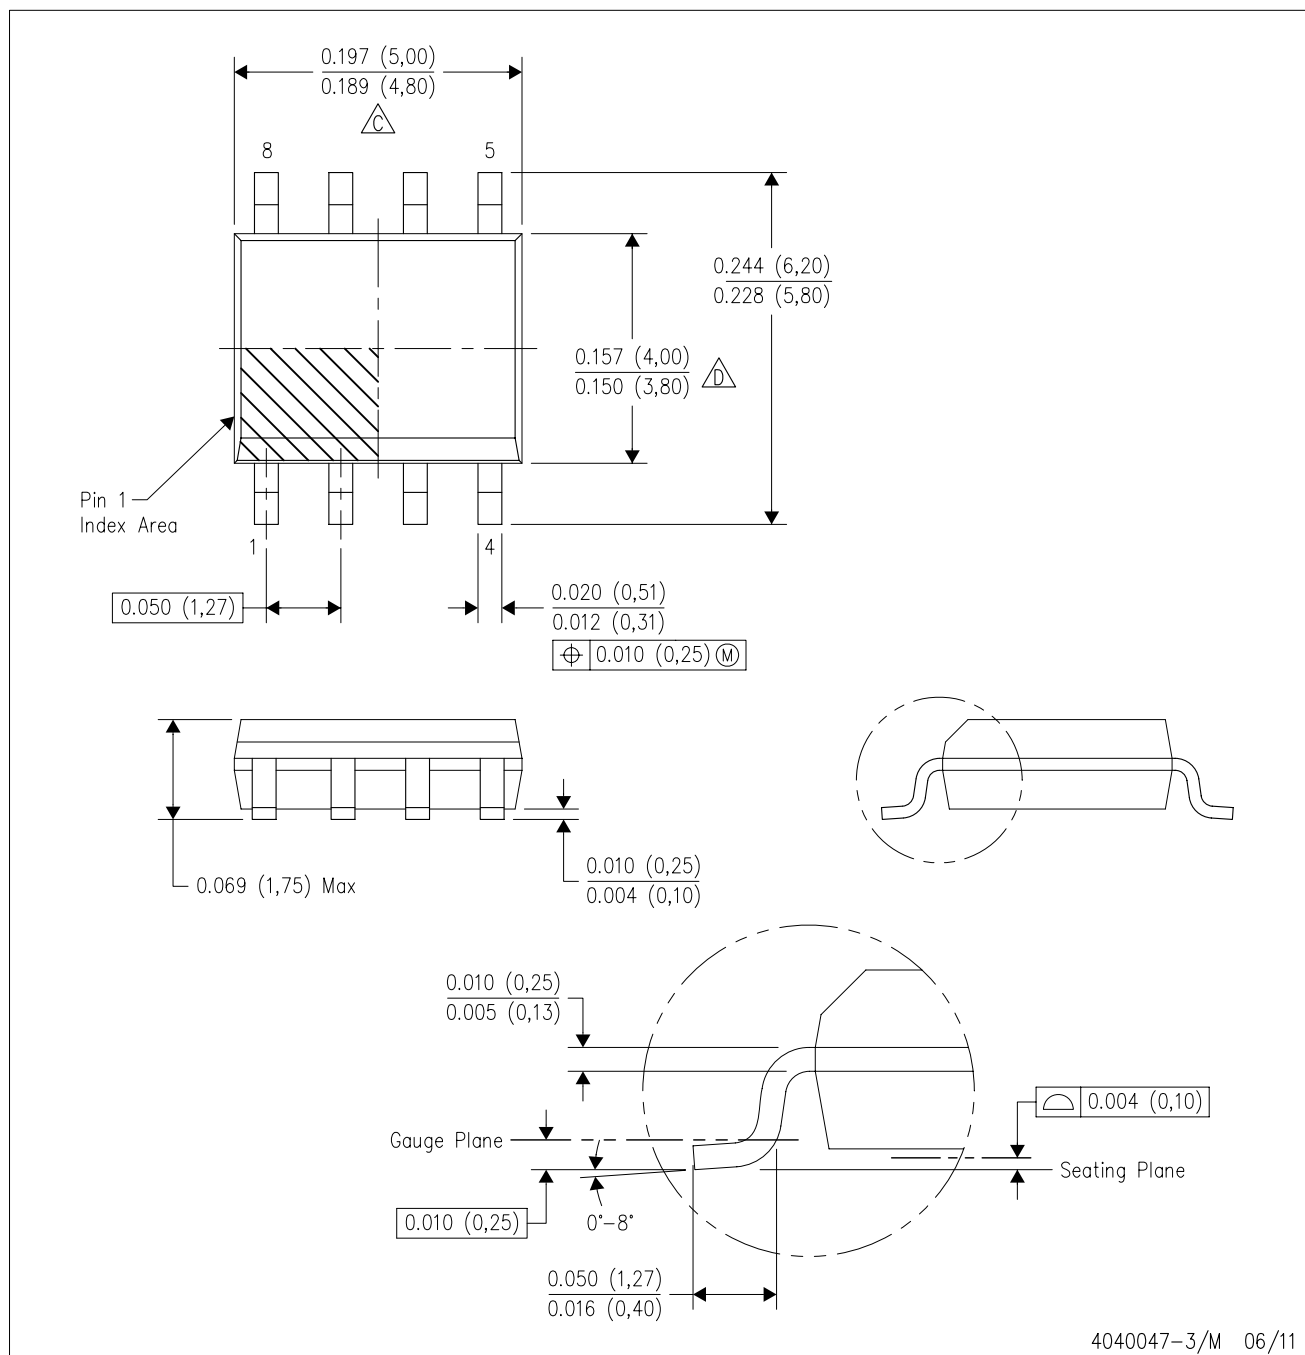

- NOTES:
- A. All linear dimensions are in inches (millimeters).
 - B. This drawing is subject to change without notice.
 - $\triangle C$ Body length does not include mold flash, protrusions, or gate burrs. Mold flash, protrusions, or gate burrs shall not exceed 0.006 (0,15) each side.
 - $\triangle D$ Body width does not include interlead flash. Interlead flash shall not exceed 0.017 (0,43) each side.
 - E. Reference JEDEC MS-012 variation AA.

D (R-PDSO-G8)

PLASTIC SMALL OUTLINE

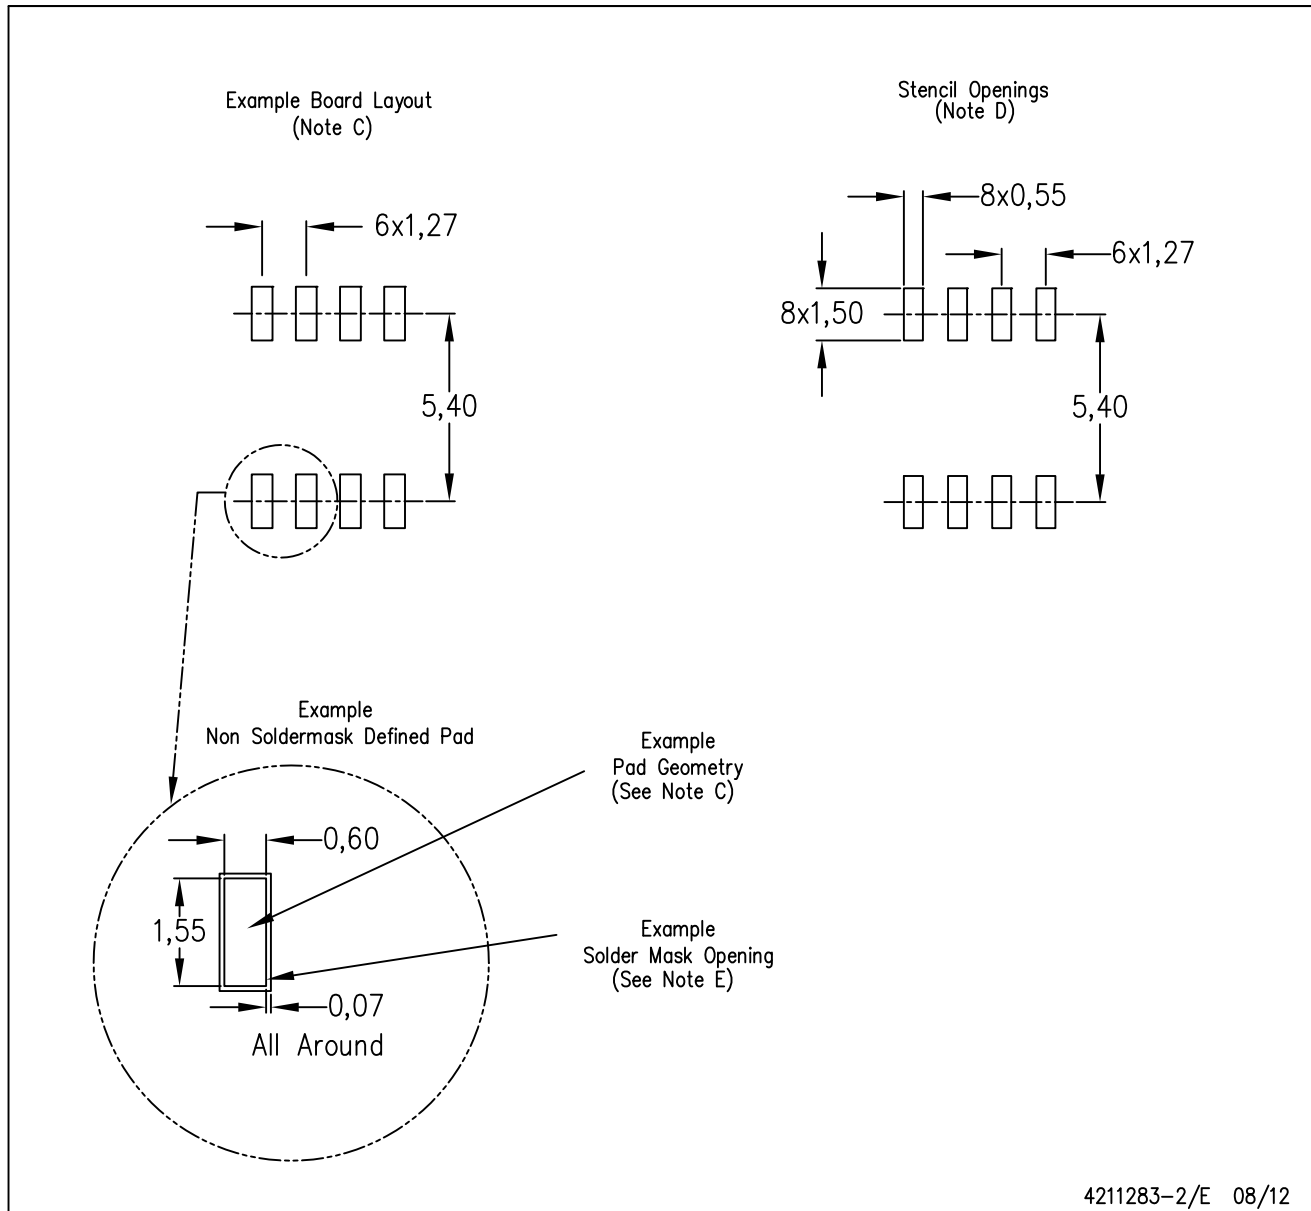

- NOTES:
- All linear dimensions are in millimeters.
 - This drawing is subject to change without notice.
 - Publication IPC-7351 is recommended for alternate designs.
 - Laser cutting apertures with trapezoidal walls and also rounding corners will offer better paste release. Customers should contact their board assembly site for stencil design recommendations. Refer to IPC-7525 for other stencil recommendations.
 - Customers should contact their board fabrication site for solder mask tolerances between and around signal pads.

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com