


2-Way Power Divider

P/N: JXWBGF-T-2-2200-2700-80

Frequency Range(MHz)	2200-2700
Insertion Loss(dB)	0.4 max
Isolation(dB)	20 min
Power Handling(W)	80 CW
Phase Balance(°)	3 max
Amplitude Balance(dB)	0.2 max
VSWR	1.3:1 max
Connector	SMA-Female
Operating Temperature(°C)	-40 ~ +80
Storage Temperature(°C)	-55 ~ +85
Size(mm)	50.8x50.8x16

Outline Drawing

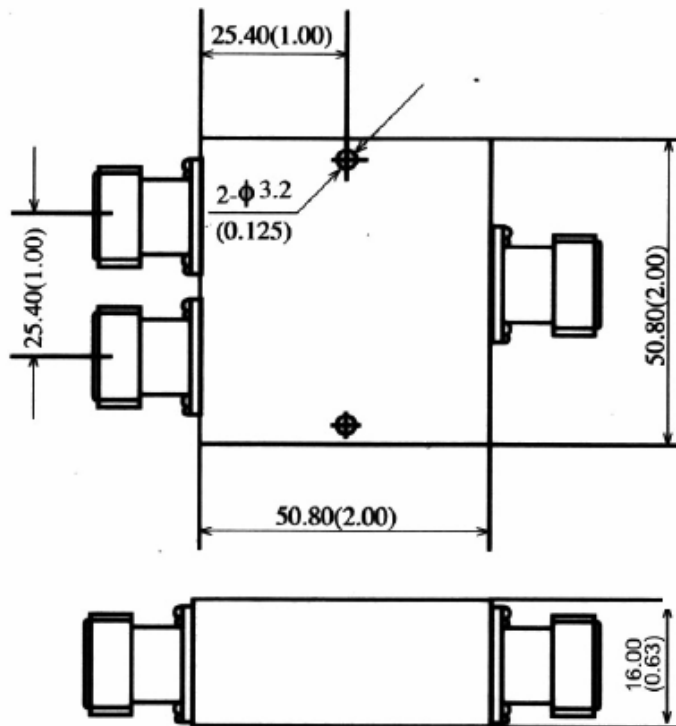

For current data sheets, please contact: sales@aacix.com