
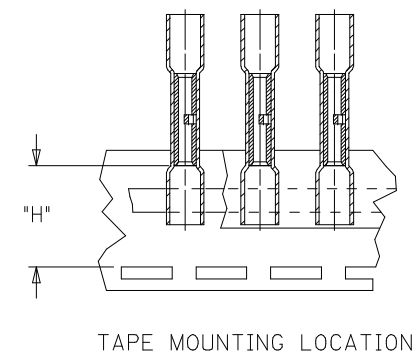


10		9		8		7		6		5		4		3		2		19164	
MATERIAL NUMBER	ENGINEERING NUMBER	MYLAR TAPE MATERIAL NUMBER	MYLAR TAPE ENGINEERING NUMBER	PERMA-SEAL COLOR	WIRE AWG 	"A" (F) MIN	"B" Ø MAX	(F) "C" MAX	"H" ±.010/0.25	"D" MIN									
I91640013	SAA-22-18	I91640014	SAA-22-18T	RED	22-18	.185/4.70	.280/7.11	1.55/39.4	.767/19.48	.059/1.50									
I91640044	SBB-16-14	I91640045	SBB-16-14T	BLUE	16-14	.195/4.95	.308/7.82	1.55/39.4	.727/18.47	.091/2.31									
I91640056	SC-12-10	I91640057	SC-12-10T	YELLOW	12-10	.275/6.99	.383/9.73 (F)	1.80/45.7	.800/23.32	.139/3.53 (F)									
I91640079	(F) SD-354	---	---	RED	8	.300/7.62	.448/11.38	2.05/52.4	---	.165/4.19									

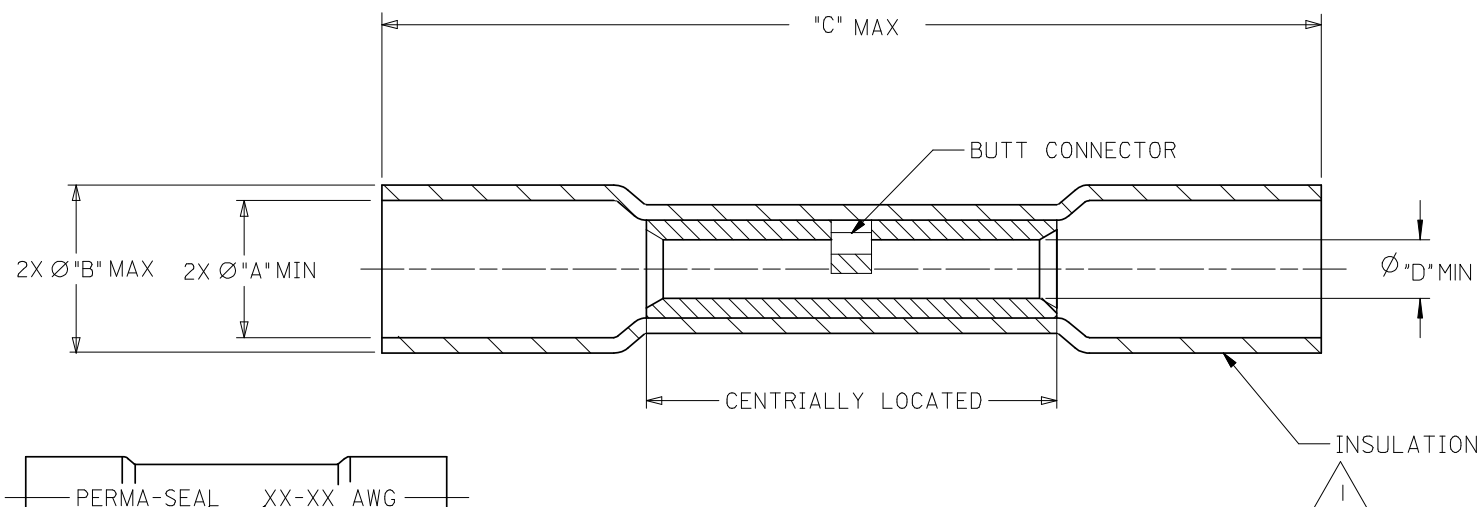

SALES DRAWING

NOTES.

1. INSULATION MATERIAL: HEAT SHRINKABLE TUBING WITH HOTMELT INNER LINER. SEE CHART FOR COLOR.
2. SEAMLESS TIN PLATED COPPER TERMINAL.
3. PRINTED TEXT IN BLACK APPROXIMATELY .12 (3.0) HIGH.
- (F) 4. PART IS ROHS COMPLIANT.

UPDATE MAX LENGTH EC NO: WNA2008-0006 DRAWN: THRODAHL 2007/12/20 CHKD: JMACNEIL 2007/12/29 APPR: JMACNEIL 2008/01/08	DESCRIPTION	QUALITY SYMBOLS ▼=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION			
				mm	INCH	DRAWN BY BRE	DATE 2002/03/22	TITLE PERMA-SEAL NIAC BUTT CONNECTORS				
			4 PLACES	± ---	± ---	CHECKED BY HEB	DATE 2002/03/22					
			3 PLACES	± ---	± ---	APPROVED BY RWD	DATE 2002/03/22					
			2 PLACES	± ---	± ---	MOLEX MOLEX INCORPORATED						
1 PLACE	± ---	± ---	MATERIAL NO.		DOCUMENT NO.		SHEET NO.					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SEE CHART		SD-19164-017		1 OF 1					
REV			SIZE B		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							