



1. Mechanical Dimensions:

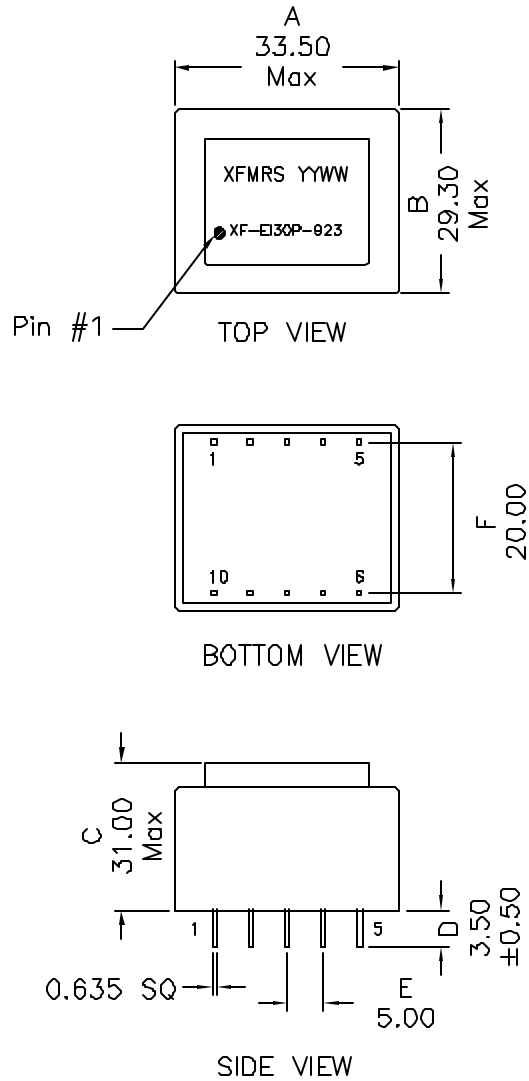

2. Schematic:

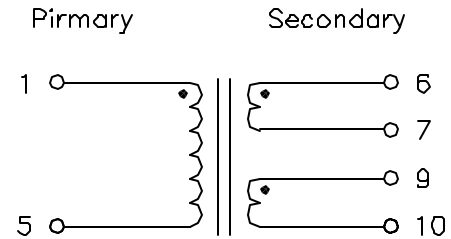

3. Electrical Specifications:

Maximum Power: 2.3VA
 Input Voltage and Frequency: 115V 50/60Hz
 Secondary Voltage: 2x9.0Vac±3%, 0.128Arms
 Excitation I: 0.035A max @ 115V 50Hz
 Isolation Voltage: 2500Vac, Pri to Sec, 2 seconds

Notes:

1. Solderability: Leads shall meet MIL-STD-202G, Method 208H for solderability.
2. Flammability: UL94V-0
3. ASTM oxygen index: > 28%
4. Insulation System: Class F 155°C, UL file E151556
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C
6. Storage Temperature Range: -55°C to +125°C
7. Aqueous wash compatible
8. Electrical and mechanical specifications 100% tested
9. RoHS Compliant Component

XFMRs Inc www.XFMRs.com	Title: 2.3W TRANSFORMER		
	UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.25 Dimensions in MM		P/N: XF-EI30P-923 REV. A
SHT 1 OF 1	DWN.	Juan Mao	Apr-21-08
	CHK.	YK Liao	Apr-21-08
	APP.	BW	Apr-21-08

DOC. REV: A/3