ARL2501 THRU ARL2512

HIGH VOLTAGE BUTTON DIODES FOR AUTOMOTIVE

VOLTAGE RANGE
100 TO 1200 VOLTS
CURRENT 25AMPS


Features

- Low leakage
- Low forward voltage drop
- High current capability
- High forward surge current capability

Mechanical Data

- Case: transfer molded plastic
- Technology: button with vcauum soldered
- Epoxy: UL94V-0 rate flame retardant
- Polarity: color ring denotes cathode
- Lead: Plated lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weigth: ARL 2.70 grams, ARSL 2.60 grams

ARL

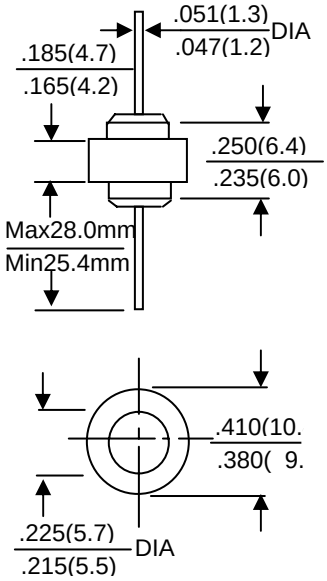

Dimensions in inches and millimeters

Maximum Ratings and Electrical Charactristics

Rating at 25°C ambient temperature unless otherwise specified
Single phase, half wave, 60Hz, resistive or inductive load
For capacitive load derate current by 20%

Parameters	Symbols	ARL2501	ARL2502	ARL2504	ARL2506	ARL2508	ARL2510	ARL2512	Units
Maximum repetitive peak reverse voltage	V_{RRM}	100	200	400	600	800	1000	1200	Volts
Maximum RM S voltage	V_{RMS}	70	140	280	420	560	700	840	Volts
Maximum DC blocking voltage	V_{DC}	100	200	400	600	800	1000	1200	Volts
Maximum Average rectified forward current at T_C=110°C	I_o	25							Amps
Peak forward surge current 8.3mS single half sine-wave superimposed on rated load (JE DEC Method)	I_{FSM}	300							Amps
Rating for fusing(t<8.3ms)	I^2t	374							A^2S
Maximum instantaneous forward voltage drop at 35A	V_F	1.0							Volts
Maximum DC reverse current T_A=25°C at rated DC blocking voltage T_A=150°C	I_R	5.0 500							uA
Typical thermal resistance	$R_{\theta JC}$	1.0							°C/W
Operating and storage temperature	T_J,T_{STG}	-65 to +175							°C

Notes: 1.Enough heatsink must be considered in application.

ARL2501 THRU ARL2512

Ratings and Characteristic Curves

FIG.1–TYPICAL FORWARD CURRENT DERATING CURVE

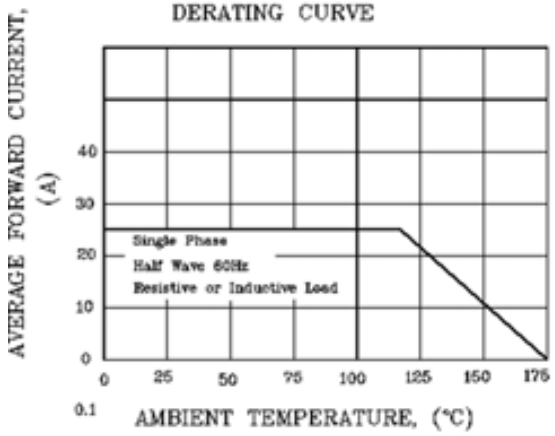


FIG.2–MAXIMUM NON–REPETITIVE PEAK FORWARD SURGE CURRENT

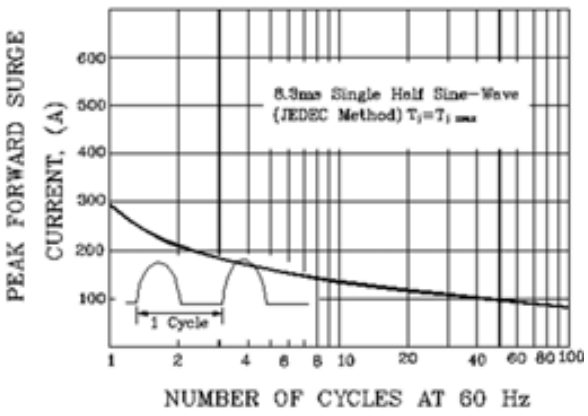


FIG.3–TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

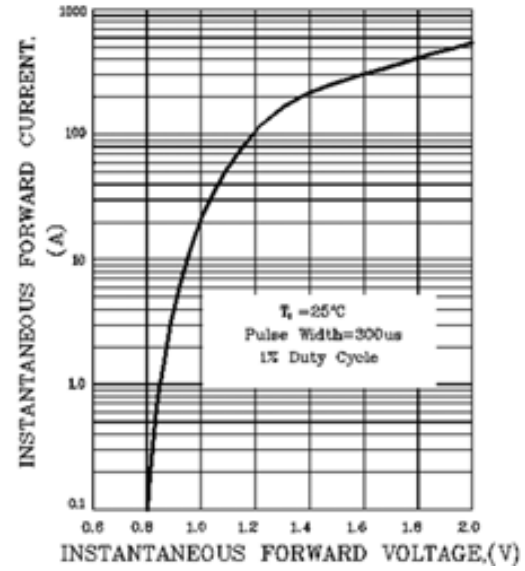


FIG.4– FORWARD POWER DISSIPATION

