

# Dialight

## CONFIRMATION LIGHT FOR PRE-EMPTION / RED LIGHT RUNNING



### FEATURES / BENEFITS

- ▲ Low power consumption
- ▲ High output
- ▲ Provides emergency vehicle with visual pre-emption confirmation
- ▲ Replaces incandescent lamp typically used in red light running applications
- ▲ Flat lens for directional viewing
- ▲ Domed lens for Omni-directional viewing
- ▲ White medium spot brighter on axis than 150 W Flood Light
- ▲ Fits existing PAR 38 socket
- ▲ Compact size
- ▲ Long Life


### SPECIFICATIONS

- ▲ Operating Temperature : -40°C to +75°C
- ▲ Storage Temperature : -40°C to +100°C
- ▲ Lens material : Polycarbonate UL 94V-0
- ▲ Edison Based
- ▲ Operating Voltage : 120 VAC
- ▲ Options : Available in white and blue



### EDISON BASED PRE-EMPTION STATUS INDICATOR

Part Number	Output Color	Lens Type	Voltage	Power (W)	Output
TB1-7401-101	White	Flat, Non-diffused	120 VAC	7	±15° Medium Spot
TB2-8111-001	Blue	Domed, Diffused			360°

Intensity (cd) vs. Viewing Angle  
TB1-7401-101 (White)

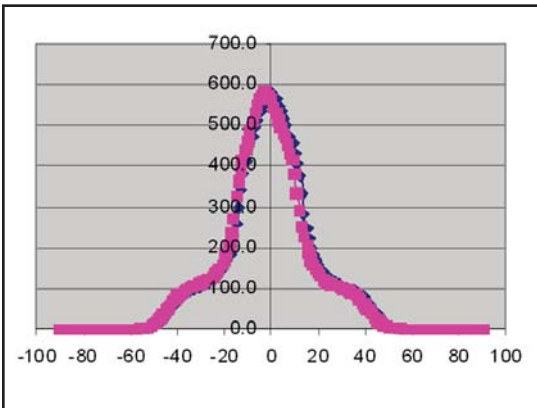

Intensity (cd) vs. Viewing Angle  
TB2-8111-001 (Blue)

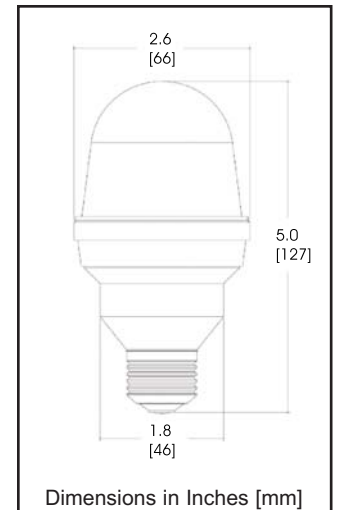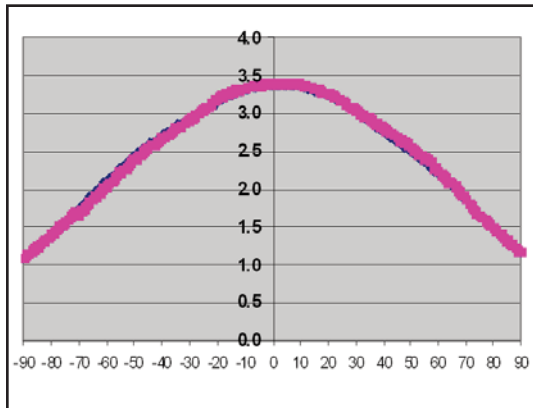

### Dialight Corporation

1501 Route 34 South • Farmingdale, NJ 07727 USA

Tel: (1) 732-919-3119 • Fax: (1) 732-751-5778

www.dialight.com



MDTSPRRLRX001\_A