

CABLE SPECIFICATIONS

DESCRIPTION	COLOR CODE	NOMINAL O.D.	OVERALL RATING	COLOR	APPROVAL
3x1.0mm² H05VV-F	INT'L	7.1	5A 250V	BLACK	

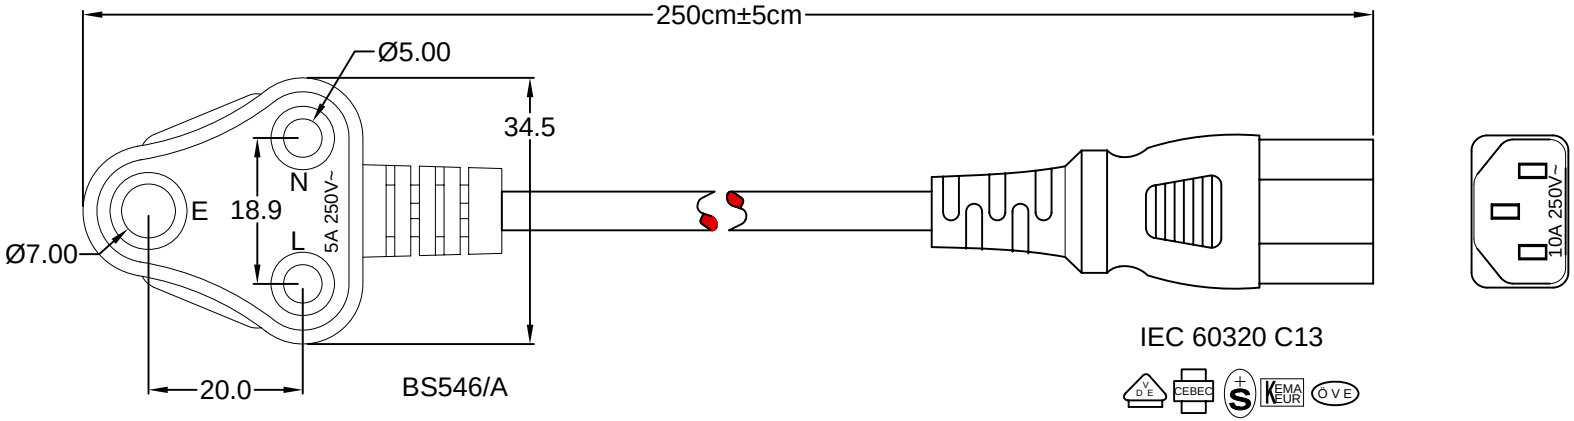

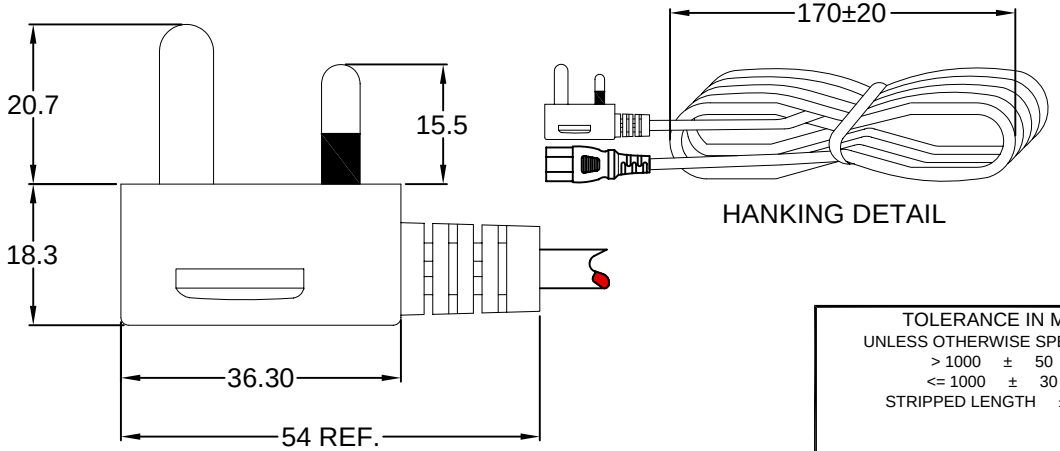

HANKING DETAIL

RoHS COMPLIANT

REVISIONS					
REV	DATE	CHANGE	CHNG	CHKD	APPR
A	4/20/00	REVISED / REDRAWN	PB	JJ	TD
B	10/17/01	REVISED & UPDATED	TD	PB	
C	10/26/01	ADD PLUG 7 CON. DIM	TD	PB	
D	12/11/01	REVISED / UPDATED	GQ	PB	
E	4/08/02	O. RATING WAS 10A	TD	PB	

TOLERANCE IN MM
UNLESS OTHERWISE SPECIFIED
> 1000 ± 50
<= 1000 ± 30
STRIPPED LENGTH ± 2

DRAWN BY	TD	DATE:	4/30/99
CHECK BY	PJ	DATE:	4/30/99
APPR BY	SS	DATE:	4/30/99

Power Dynamics, Inc.
Phone: 973-560-0019 Whippany, New Jersey Fax: 973-560-0076

PART: INDIA / SOUTH AFRICA CORD SET;
250cm LONG; BS546/A TO IEC 60320 C13

PART #: 16012

SHEET 1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: E