
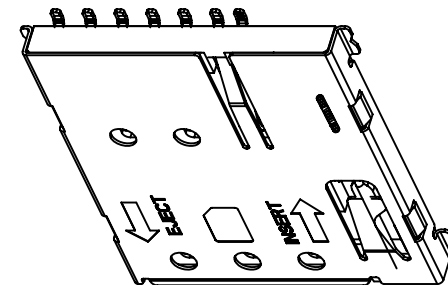


PCB AREA
RECOMMENDED PCB LAYOUT
 GENERAL TOLERANCE ± 0.05

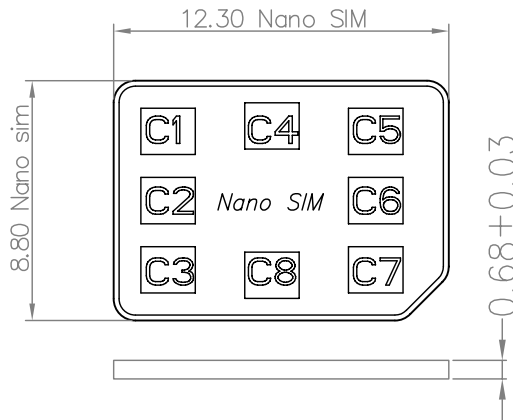

Specification

MATERIAL:


Insulator: High Temperature Thermoplastic, UL 94V-0.
 Contact: Copper Alloy
 SHELL: SUS

PLATING:

Contact: Plated 50u'' Ni Overall Contact Au 1U
 Shell: Plated 50u'' Ni Overall
 Plated 1u''Au Selective Contact Area

Electrical:

Current Rating :0.5mA AC/DC max.
 Voltage Rating :125V AC/DC
 Ambient Temperature Range :-20° C~+60° C
 Storage Temperature Range :-40° C~+70° C
 Ambient Humidity Range :95% R.H. Max.
 Contact Resistance:100m Ω max.
 Insulation Resistance:1000M min./500VDC
 Mating Cycles:10,000 Insertions
 产品耐温温度: 260° C $\frac{+1.70^{\circ}C}{-5^{\circ}C}$
 Mating Cycles:5,000-10,000 Insertions

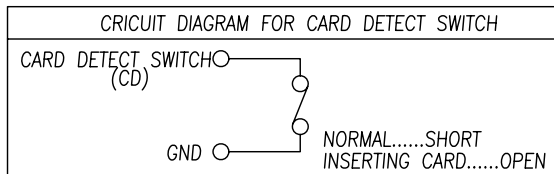

SIM pin assignment	
PIN#	Name
C1	VCC供电电压
C2	RST重置
C3	CLK时钟
C5	GND接地
C6	VPP程序电压
C7	I/O输入输出



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: NANO SIM PUSH 1.37H 带CD PIN
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC63-SIM07-137
UNIT: mm [inch]	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-SIM15073105
SCALE: 1:1 SIZE: A4			SHEET NO. 2 OF 2