65 KBWO


Pluggable screw terminal blocks on socket boards, pitch 5.0 mm




Socket board, angular, solder pins single row, consecutive placement without loss of pitch

Approvals:

65 KBWO

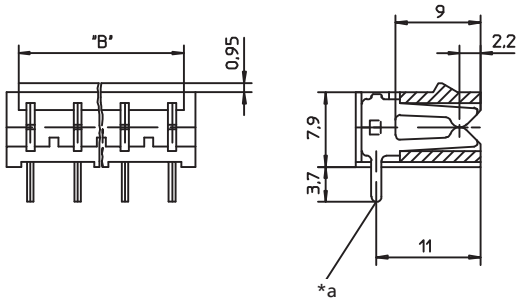



*a bore hole of printed circuit board Ø 1.3 mm

Environmental conditions

Temperature range	-25 °C/+100 °C

Materials

Insulating body	PA, V-2 according to UL94
Contact spring	CuSn, pre-nickel and tin-plated

Mechanical data

Insertion force/contact	≤ 2,5 N
Withdrawal force/contact	≥ 1,5 N

Electrical data (at T_{amb} 20 °C)

Rated current	10 A
Rated voltage	250 V AC
Rated impulse voltage	3 kV/60 s
Tracking resistance	CTI 600
Creepage distance	≥ 4,0 mm
Clearance	≥ 4,0 mm

Associated products

Counterparts

KS KSC

65 KBWO

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)	Dimensions	
				B (mm)	L (mm)
KBWO 02	2	200	2000	7.5	10
KBWO 03	3	200	2000	12.5	15
KBWO 04	4	200	2000	17.5	20
KBWO 05	5	200	2000	22.5	25
KBWO 06	6	200	2000	27.5	30
KBWO 07	7	200	2000	32.5	35
KBWO 08	8	200	2000	37.5	40
KBWO 09	9	200	2000	42.5	45
KBWO 10	10	200	2000	47.5	50

Packaging:
in bulk, in a cardboard box