


Vitreous Enamelled Wirewound Resistors

V700 (RB Style) Series

- **Stability for harsh environments**
- **Overload characteristics ideal for protection circuits**
- **High stability and reliability**
- **High power dissipation for size**
- **Impervious lead free vitreous enamel coating**

OBSOLETE
(RB58 & RB60 ONLY)

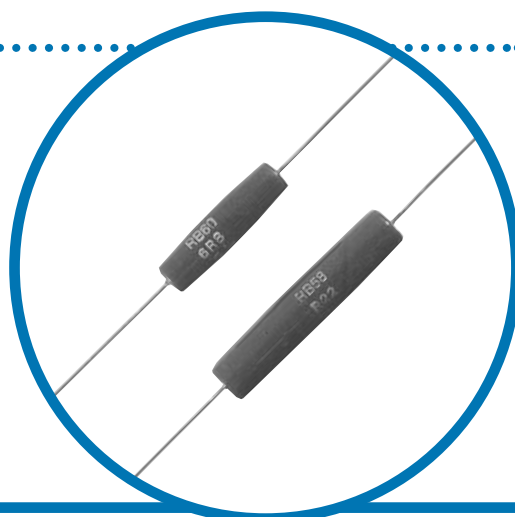


Electrical Data

		V757 (RB57)	V758 (RB58)	V759 (RB59)	V760 (RB60)	V761 (RB61)
Power rating at 25°C	watts	7	11.0	3.0	8.0	5.0
Resistance range	ohms	0R1 to 20K	0R2 to 82K	0R1 to 10K	0R1 to 56K	0R1 to 15K
Limiting element voltage	volts	200	400	100	250	160
TCR	ppm/°C	Typically: +75			Maximum +120	
Resistance tolerance	%	5 Closer tolerances to special order				
Standard values		E24 preferred. Other values to special order				
Thermal impedance	°C/watt	44	32	88	36	58
Ambient temperature range	°C	-55 to 200				

Physical Data

Maximum Dimensions (mm) and Weight (g)					
Type	L max	D max	f min	d max	Wt. Nom
V757 (RB57)	22.2	8	30	0.88	2
V758 (RB58)	47	11	30	0.88	9
V759 (RB59)	12.7	5.6	30	0.88	1
V760 (RB60)	36	10.0	30	0.88	4
V761 (RB61)	23	7.0	30	0.88	2

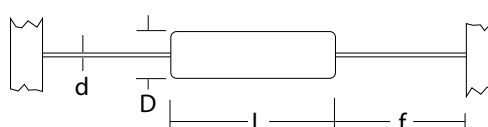

Construction

A high purity ceramic substrate is assembled with force fit end caps to which are welded the termination wires.

The resistive element is wound on the substrate and welded to the caps; the vitreous enamel protective coating is then applied.

General Note

TT electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Terminations

Material Copper clad steel wire, nickel plated and solder-coated.

Strength The terminations meet requirements of IEC 68.2.21.

Solderability The terminations meet the requirements of IEC 115-1, Clause 4.17.3.2.

Performance Data

		Actual Performance	
		Maximum	Typical
Load at rated power: 1000 hrs	$\Delta R\%$	5	3.5
Dry heat: 1000 hours at 200°C	$\Delta R\%$	2	1
Shelf life: 12 mths at room temp	$\Delta R\%$	0.03	0.02
Derating from rated power at 25°C	$\Delta R\%$	See derating curve	
Short term overload	$\Delta R\%$	1.5	0.5
Climatic	$\Delta R\%$	0.5	0.2
Climatic category	$\Delta R\%$	55/200/56	55/200/56
Long term damp heat	$\Delta R\%$	0.05	0.02
Temperature rapid change	$\Delta R\%$	0.5	0.05
Resistance to solder heat	$\Delta R\%$	0.25	0.03
Vibration	$\Delta R\%$	0.25	0.05
Noise ($\mu V/V$ in a decade of frequency)		zero	
Shock	$\Delta R\%$	0.2	0.05
Pulse handling		Data available by request	



Application Notes

The terminations should not be bent closer than 1.6mm from the body, and the recommended minimum bend radius is 1.2mm. If resistors are to dissipate full rated power, the terminations should not be soldered closer than 4mm from the body.

When cold, vitreous enamel has excellent insulation resistance. In common with all insulants the specific resistance of the enamel decreases with increase in temperature. Therefore, resistors operated at near maximum temperature cannot be classed as insulated and should not be used in contact with any conducting material.

Care must be taken when determining clearance distance between the resistor body and the printed circuit board or other components to ensure these are not over heated. Resistance is measured 6mm from the body.

Type	L
V759	63
V757	73
V761	73

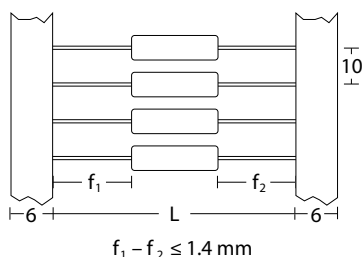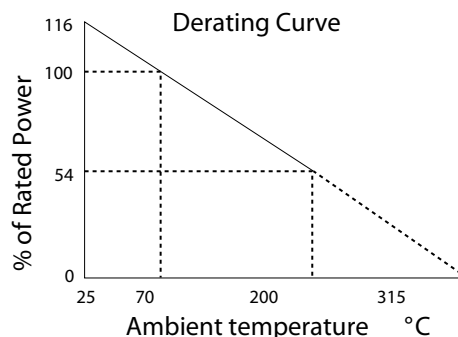

Packaging

For RB59 and RB61 the standard method of packaging is taped and Ammo Packed.

For RB57, the standard method of packaging is taped and reeled. RB58 and RB60 are loose packed in boxes. Alternative packaging available by request.

General Note

TT electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT electronics' own data and is considered accurate at time of going to print.

Ordering Procedure

Example: V757 (RB57) at 3.3 kilohms and 5% tolerance on a reel of 700 pieces –

Type

Value (use IEC62 code)

Tolerance (use IEC62 code)

J5%

Packing

RB57-3K3JI

I	Ammo	RB59, RB61	1000/box	Standard
	Tape	RB57	700/reel	
	Bulk	RB58, RB60	50/box	

General Note

TT electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT electronics’ own data and is considered accurate at time of going to print.