

Model:TA2616E-00

Characteristics:

Primary coil built-in, nanocrystalline core, overcurrent /
 undercurrent measuring, leakage current detecting,
 current metering, power monitoring.

Technical index:


- Mounting type: PCB
- Material of the core: Nanocrystalline
- Flame resistance: UL94-V0
- Execution standard: GB1208-2006
- Operating temperature: -35℃~+85℃
- Storage temperature: -45℃~+95℃
- Frequency range: 20Hz-20KHz
- Dielectric strength: 3KV 50Hz 1min



Electrical parameters:

Rated input	0-2	A
Max.input	2.4	A
Rated output	0-40	mA
Turns ratio	20: 1000	
Accuracy	± 1	%
Linearity	≤ 0.2	%
Phase difference	3.7'	
max: Max. sampling resistance	100	Ω
Weight	50	g

Schematic diagram:

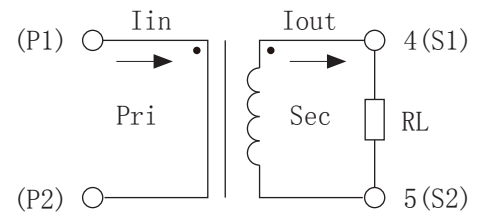

Dimensions (in mm) :

