

**AVT-50663**  
 DC – 6000 MHz  
 InGaP HBT Gain Block



**Data Sheet**


**Description**

Avago Technologies' AVT-50663 is an economical, easy-to-use, general purpose InGaP HBT MMIC gain block amplifier utilizing Darlington pair configuration housed in a 6-lead (SOT-363) surface mount plastic package.


The Darlington feedback structure provides inherent broad bandwidth performance, resulting in useful operating frequency up to 6 GHz. This is an ideal device for small-signal gain cascades or IF amplification.

AVT-50663 is fabricated using advanced InGaP HBT (Hetero-junction Bipolar Transistor) technology that offers state-of-the-art reliability, temperature stability and performance consistency.

**Component Image**

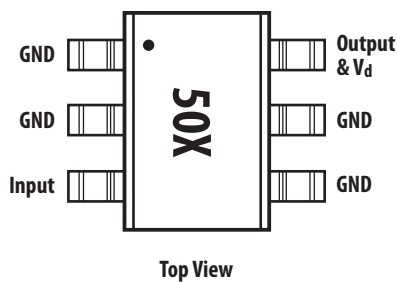

Notes:  
 Package marking provides orientation and identification  
 "50" = Device Code  
 "X" = Month of Manufacture  
 "•" = Pin 1



**Attention: Observe precautions for handling electrostatic sensitive devices.**  
 ESD Machine Model (120V)  
 ESD Human Body Model (1200V)  
 Refer to Avago Application Note A004R:  
 Electrostatic Discharge, Damage and Control.

**Features**

- Small signal gain amplifier
- Operating frequency DC to 6 GHz
- Unconditionally stable
- 50 Ohm input & output
- Flat, Broadband Frequency Response up to 2 GHz
- Industry standard SOT-363
- Lead-free, RoHS compliant, Green

**Specifications**


2 GHz, 5V Vcc, 36mA (typical)

- 15.3 dB Gain
- 12.5 dBm P1dB
- 25 dBm OIP3
- 4 dB NF
- 15 dB IRL and ORL

**Applications**

- Cellular / PCS / 3G base station
- Wireless Data / WLAN
- WiMAX / WiBRO
- CATV & Cable modem
- ISM

**Typical Biasing Configuration**

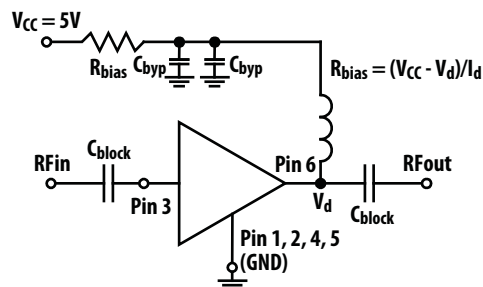

## Absolute Maximum Rating<sup>[1]</sup> $T_A=25^\circ\text{C}$

Symbol	Parameter	Units	Absolute Max.
$I_d$	Device Current	mA	70
$P_{IN,MAX}$	CW RF Input Power	dBm	15
$P_{DISS}$	Total Power Dissipation <sup>[3]</sup>	mW	297
$T_{OPT}$	Operating Temperature	$^\circ\text{C}$	-40 to 85
$T_{J,MAX}$	Junction Temperature	$^\circ\text{C}$	150
$T_{STG}$	Storage Temperature	$^\circ\text{C}$	-65 to 150

## Thermal Resistance

Thermal Resistance<sup>[2]</sup>  $\theta_{JC} = 149^\circ\text{C/W}$   
 $(I_d = 36 \text{ mA}, T_C = 85^\circ\text{C})$

Notes:

1. Operation of this device in excess of any of these limits may cause permanent damage.
2. Thermal resistance measured using Infrared measurement technique.
3. Ground lead temperature is  $25^\circ\text{C}$ . Derate  $6.7\text{mW}/^\circ\text{C}$  for  $T_C > 106^\circ\text{C}$ .

## Electrical Specifications<sup>[4]</sup>

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50 \Omega$ ,  $V_{CC} = 5 \text{ V}$ ,  $R_{bias} = 30 \Omega$ ,  $P_{in} = -15 \text{ dBm}$  (unless specified otherwise)

Symbol	Parameter and Test Condition	Frequency	Units	Min.	Typ.	Max.
$I_d$	Device Current		mA	32.5	36	39.5
$G_p$	Power Gain	900 MHz 2000 MHz	dB	13.8	15.8 15.3	16.8
$\Delta G_p$	Gain Flatness	0.05 - 2 GHz			0.6	
$f_{3dB}$	3 dB Bandwidth		GHz		5.2	
OIP3 <sup>[5]</sup>	Output 3 <sup>rd</sup> Intercept Point	900 MHz 2000 MHz	dBm	23.5	26.4 25	
S11	Input Return Loss, $50\Omega$ source	900 MHz 2000 MHz	dB		-21.9 -15.4	
S22	Output Return Loss, $50\Omega$ load	900MHz 2000 MHz	dB		-19.1 -14.4	
S12	Reverse Isolation	900 MHz 2000 MHz	dB		-19.2 -19.2	
P1dB	Output Power at 1dB Gain Compression	900 MHz 2000 MHz	dBm		13 12.5	
NF	Noise Figure	900 MHz 2000 MHz	dB		3.7 4	

Notes:

4. Measurements obtained on CPWG line with reference plane at the ends of DUT leads (as shown in Figure 1).
5. OIP3 test condition:  $F_{RF1} - F_{RF2} = 10\text{MHz}$  with input power of  $-15 \text{ dBm}$  per tone measured at worse side band.

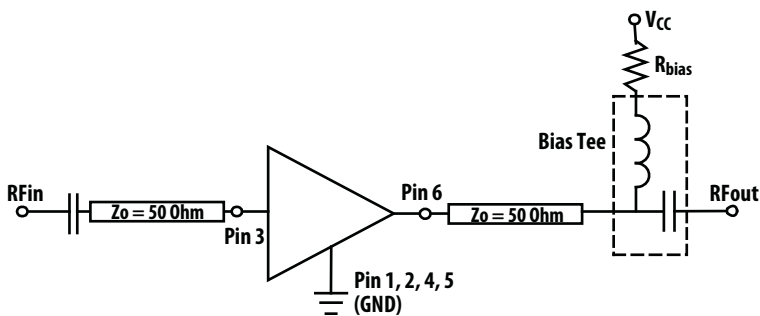


Figure 1. Block diagram of board used for  $I_d$ , Gain, OIP3, S11, S22, S12, OP1dB and NF measurements. Circuit losses have been de-embedded from actual measurements.

**Product Consistency Distribution Charts at 2 GHz,  $V_{CC} = 5\text{ V}$ ,  $R_{bias} = 30\ \Omega$**

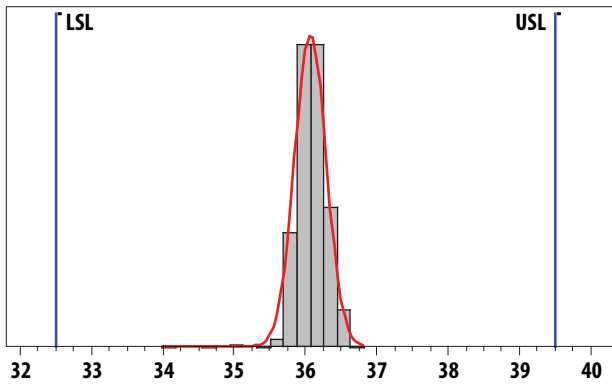


Figure 2.  $I_d$  (mA) distribution. LSL = 32.5, Nominal = 36, USL = 39.5

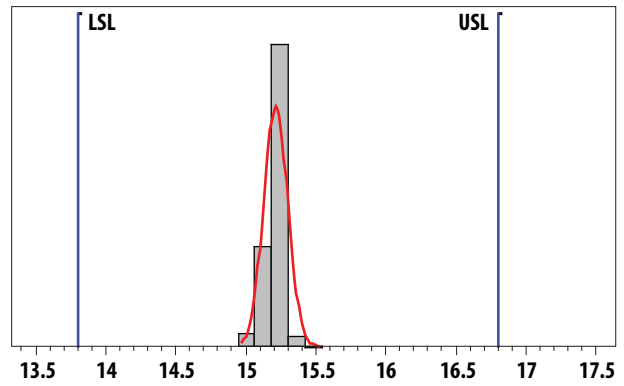


Figure 3. Gain (dB) distribution. LSL = 13.8, Nominal = 15.2, USL = 16.8

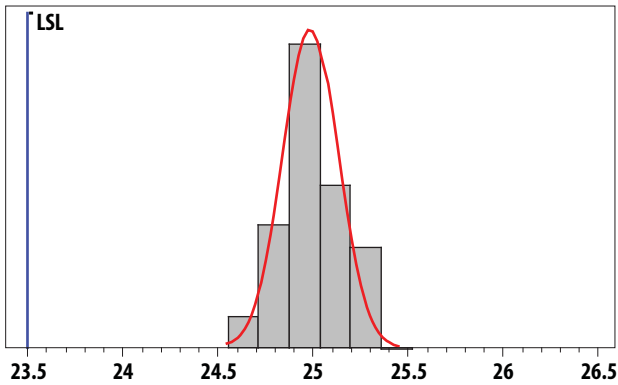


Figure 4. OIP3 (dBm) distribution. LSL = 23.5, Nominal = 25

Notes:

1. Statistical distribution determined from a sample size of 1421 samples taken from 6 different wafers, measured on a production test board.
2. Future wafers allocated to this product may have typical values anywhere between the minimum and maximum specification limits.

## AVT-50663 Typical Performance Curves

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50 \Omega$ ,  $P_{in} = -15 \text{ dBm}$  (unless specified otherwise)

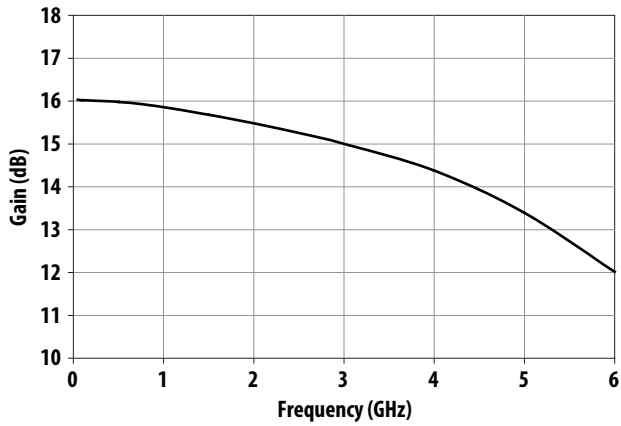


Figure 5. Gain vs Frequency at  $I_d = 36\text{mA}$

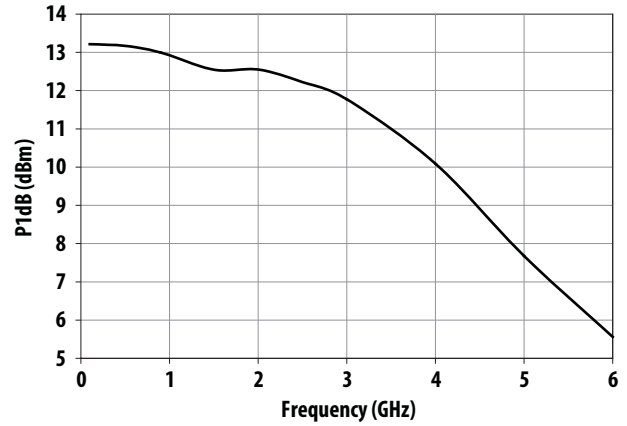


Figure 6. P1dB vs Frequency at  $I_d = 36\text{mA}$

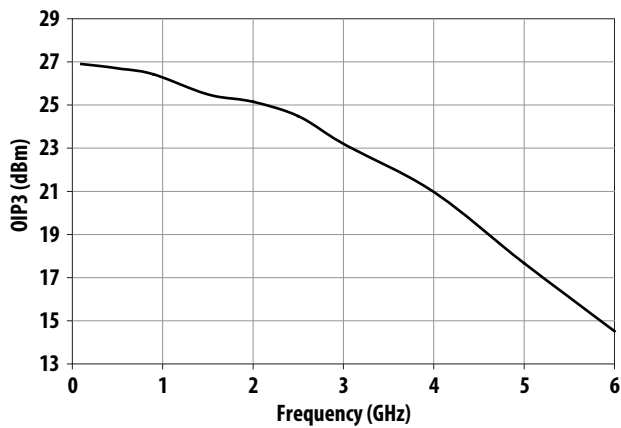


Figure 7. OIP3 vs Frequency at  $I_d = 36\text{mA}$

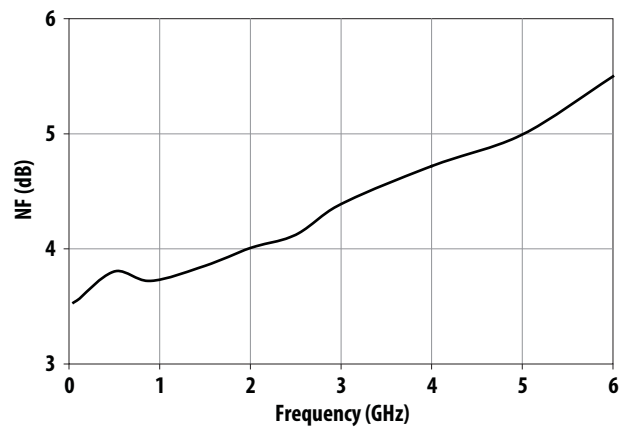


Figure 8. NF vs Frequency at  $I_d = 36\text{mA}$

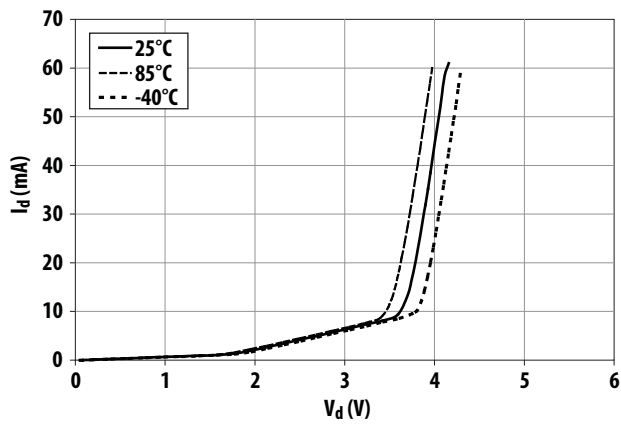


Figure 9.  $I_d$  vs  $V_d$  and Temperature

## AVT-50663 Typical Performance Curves

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50 \Omega$ ,  $P_{in} = -15 \text{ dBm}$  (unless specified otherwise), continued

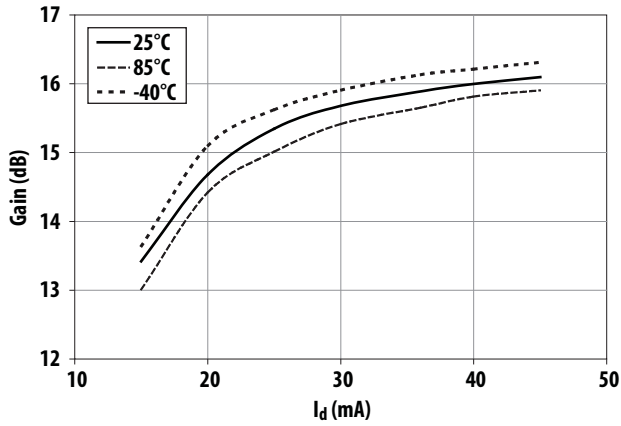


Figure 10. Gain vs  $I_d$  and Temperature at 900 MHz

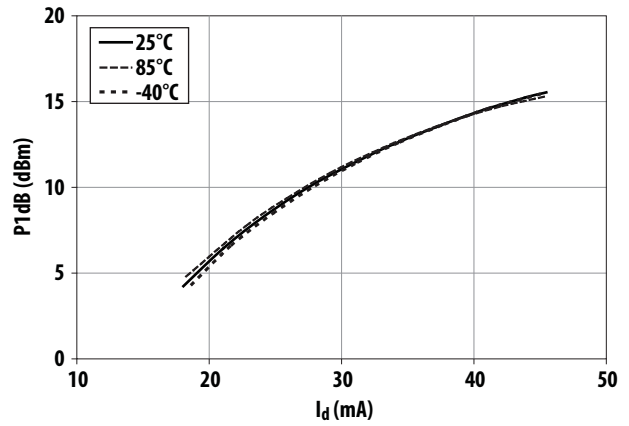


Figure 11. P1dB vs  $I_d$  and Temperature at 900 MHz

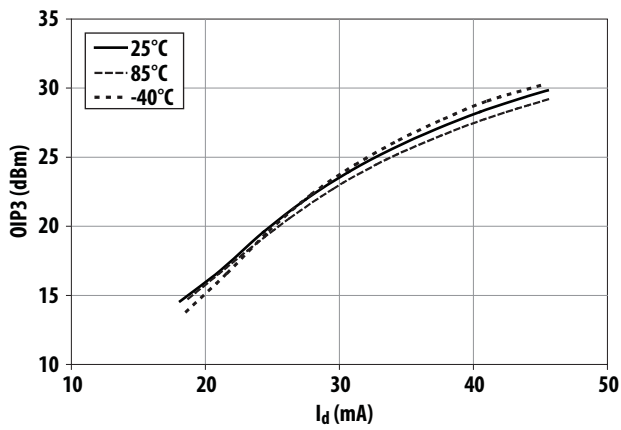


Figure 12. OIP3 vs  $I_d$  and Temperature at 900 MHz

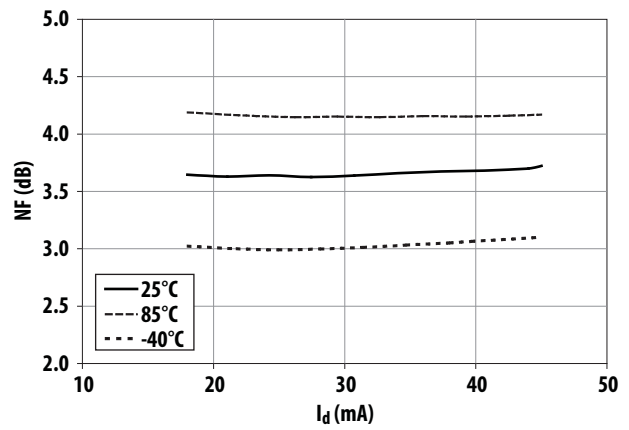


Figure 13. NF vs  $I_d$  and Temperature at 900 MHz

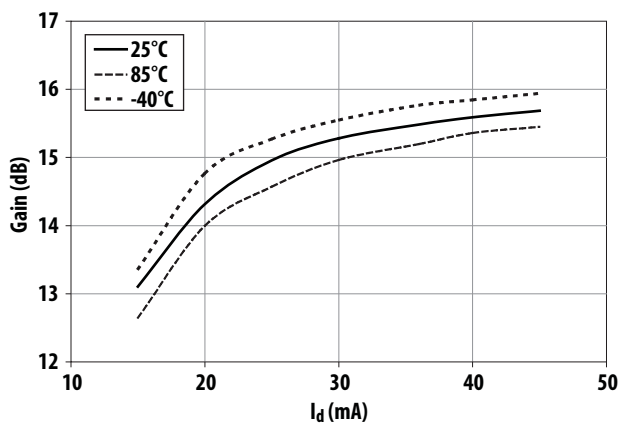


Figure 14. Gain vs  $I_d$  and Temperature at 2 GHz

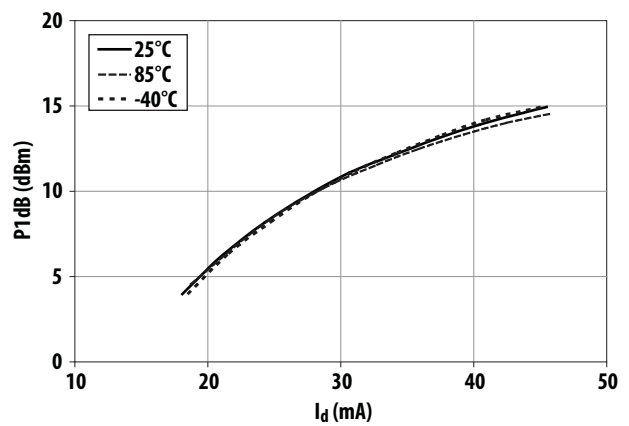


Figure 15. P1dB vs  $I_d$  and Temperature at 2 GHz

## AVT-50663 Typical Performance Curves

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50 \Omega$ ,  $P_{in} = -15 \text{ dBm}$  (unless specified otherwise), continued

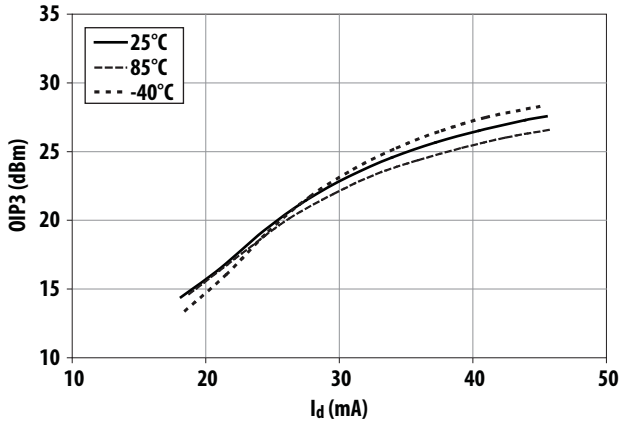


Figure 16. OIP3 vs  $I_d$  and Temperature at 2 GHz

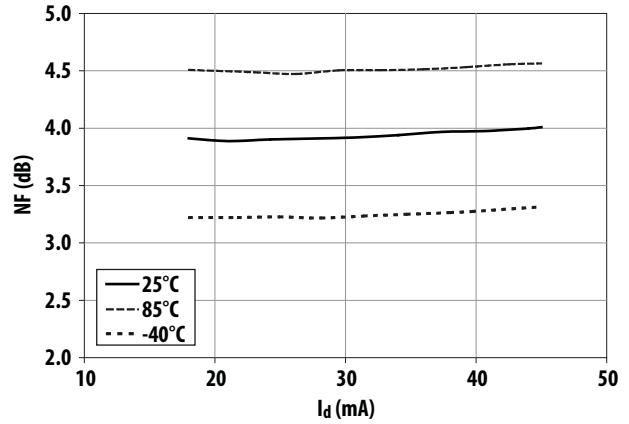


Figure 17. NF vs  $I_d$  and Temperature at 2 GHz

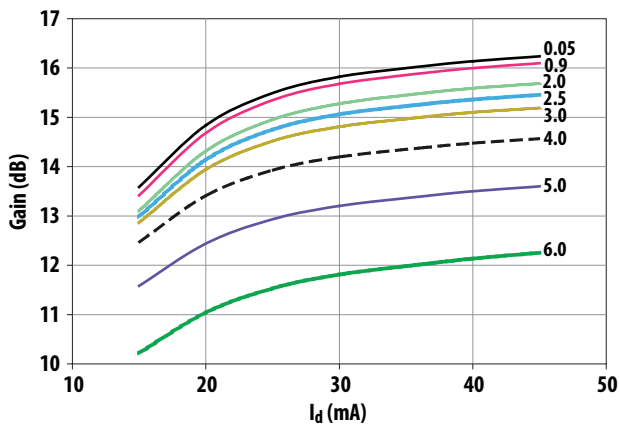


Figure 18. Gain vs  $I_d$  and Frequency (GHz)

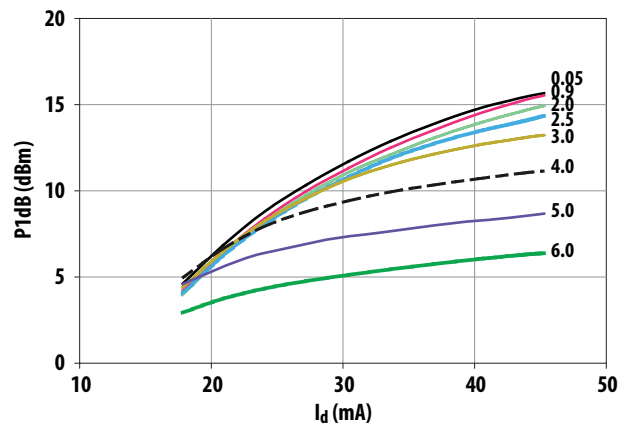


Figure 19. P1dB vs  $I_d$  and Frequency (GHz)

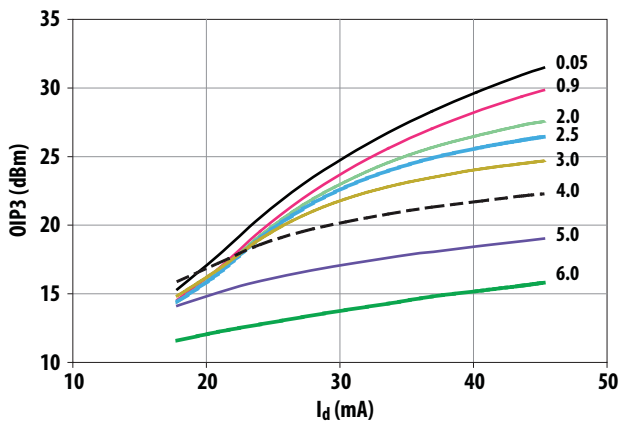


Figure 20. OIP3 vs  $I_d$  and Frequency (GHz)

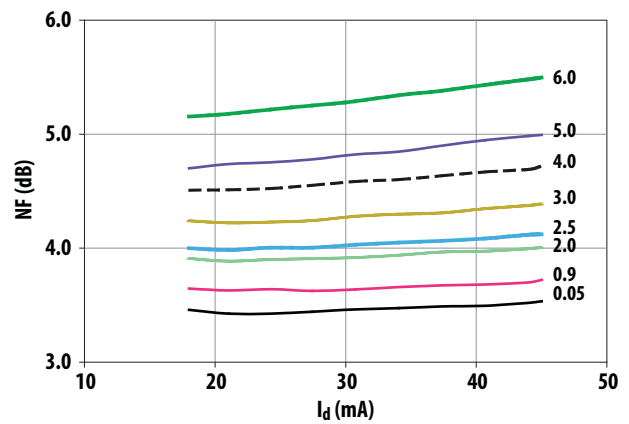


Figure 21. NF vs  $I_d$  and Frequency (GHz)

## AVT-50663 Typical Performance Curves

$T_A = 25^\circ\text{C}$ ,  $Z_o = 50\ \Omega$ ,  $P_{in} = -15\ \text{dBm}$  (unless specified otherwise), continued

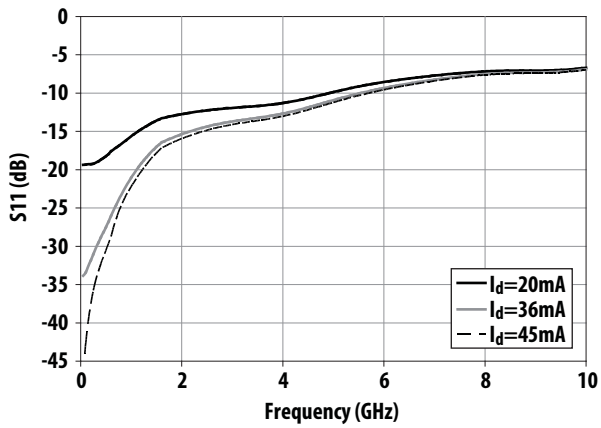


Figure 22.  $S_{11}$  vs Frequency and  $I_d$

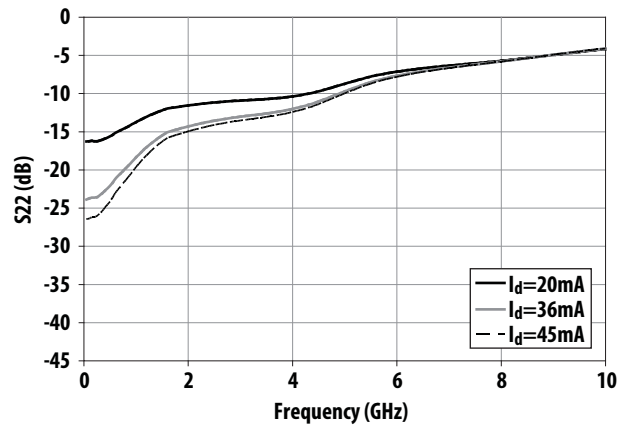


Figure 23.  $S_{22}$  vs Frequency and  $I_d$

**AVT-50663 Typical Scattering Parameters**  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$ ,  $I_d = 20 \text{ mA}$ , (unless specified otherwise)

Id=20mA	S11		S21		S12		S22		K	
	mag	angle	dB	mag	angle	mag	angle	mag		angle
0.05	0.11	0.5	14.84	5.52	178.1	0.12	-1.16	0.15	-1.3	1.1
0.1	0.11	0.058	14.83	5.51	176.3	0.12	-1.79	0.15	-2.2	1.1
0.5	0.12	-4.9	14.79	5.49	161.8	0.12	-8.75	0.17	-10.7	1.1
0.9	0.16	-14.3	14.68	5.42	147.4	0.12	-15.6	0.2	-21.3	1.1
1.5	0.21	-30.4	14.48	5.3	126.1	0.12	-25.6	0.25	-39.2	1.1
2.0	0.23	-42.5	14.32	5.2	108.7	0.11	-33.6	0.26	-54.1	1.1
2.5	0.24	-54.7	14.14	5.09	91.24	0.11	-41.5	0.28	-69.3	1.1
3.0	0.25	-67.6	13.94	4.98	73.8	0.1	-49.1	0.28	-85.2	1.2
3.5	0.26	-82	13.71	4.85	56.21	0.09	-56.5	0.29	-102	1.3
4.0	0.27	-98.3	13.41	4.68	38.38	0.09	-63.5	0.3	-120	1.3
4.5	0.29	-116	13	4.47	20.38	0.08	-69.7	0.33	-139	1.4
5.0	0.32	-135	12.44	4.19	2.521	0.07	-74.3	0.37	-156	1.6
5.5	0.35	-153	11.78	3.88	-14.9	0.06	-76.2	0.41	-172	1.8
6.0	0.37	-171	11.04	3.56	-31.7	0.05	-74.7	0.44	172.9	2.1
6.5	0.39	171.5	10.23	3.25	-48.2	0.05	-70.4	0.46	157.5	2.1
7.0	0.41	154.8	9.35	2.94	-64.4	0.05	-65.1	0.48	141.6	2.2
7.5	0.43	138.8	8.41	2.64	-80.2	0.05	-61	0.5	125.5	2.2
8.0	0.44	123.5	7.42	2.35	-95.5	0.06	-59.6	0.52	109.6	2.0
8.5	0.44	108.3	6.38	2.09	-110	0.06	-61.1	0.54	94.53	2.1
9.0	0.44	92.68	5.29	1.84	-124	0.07	-64.6	0.57	80.78	1.9
9.5	0.45	76.47	4.13	1.61	-137	0.07	-69.3	0.59	68.48	2.1
10.0	0.46	61.11	2.91	1.4	-150	0.08	-74.6	0.62	57.6	1.9
10.5	0.49	48.39	1.64	1.21	-161	0.08	-79.8	0.64	48.02	2.1
11.0	0.52	38.47	0.36	1.04	-171	0.09	-85	0.66	39.08	1.9
11.5	0.54	29.93	-0.89	0.9	179.5	0.09	-90.7	0.67	29.65	2.1
12.0	0.56	21.19	-2.13	0.78	169.2	0.09	-97.4	0.68	19.03	2.3
12.5	0.57	11.68	-3.33	0.68	158.4	0.1	-105	0.69	7.452	2.3
13.0	0.58	1.218	-4.48	0.6	147.1	0.1	-114	0.7	-4.48	2.5
13.5	0.59	-10.6	-5.58	0.53	135.5	0.1	-123	0.71	-16.3	2.8
14.0	0.59	-23.8	-6.69	0.46	124.2	0.1	-133	0.72	-27.5	3.1
14.5	0.61	-37.2	-7.91	0.4	113.8	0.1	-142	0.74	-37	3.3
15.0	0.63	-48.6	-9.22	0.35	105.1	0.1	-149	0.76	-44.1	3.3
16.0	0.69	-62.8	-11.8	0.26	93.18	0.1	-159	0.79	-51.8	3.4
17.0	0.71	-69.7	-14.2	0.19	85.49	0.1	-167	0.8	-57.5	4.3
18.0	0.72	-73.8	-16.2	0.15	78.34	0.1	-175	0.79	-67.4	5.6
19.0	0.71	-87.4	-18.1	0.12	65.13	0.1	169.3	0.79	-86.3	7.4
20.0	0.73	-111	-20.9	0.09	47.87	0.09	148.5	0.82	-109	9.1

Notes:

1. S-parameters are measured on a CPWG line fabricated on 0.025 inch thick Rogers® RO4350 material. The input reference plane is at the end of the input lead. The output reference plane is at the end of the output lead.



**AVT-50663 Typical Scattering Parameters**  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$ ,  $I_d = 36 \text{ mA}$ , (unless specified otherwise)

Id=36mA	S11		S21		S12		S22		K	
	mag	angle	dB	mag	angle	mag	angle	mag		angle
0.05	0.02	8.06	16.03	6.33	178.2	0.11	-0.93	0.06	-0.64	1.1
0.10	0.02	15.19	16.02	6.32	176.4	0.11	-1.6	0.07	-0.29	1.1
0.50	0.04	24.46	15.98	6.3	161.7	0.11	-7.94	0.08	-2.75	1.1
0.90	0.08	10.9	15.89	6.23	147.2	0.11	-14.4	0.11	-13	1.1
1.50	0.14	-14.7	15.68	6.08	125.6	0.11	-23.9	0.17	-33.1	1.1
2.00	0.17	-27.4	15.48	5.95	107.9	0.11	-31.7	0.19	-48.6	1.1
2.50	0.19	-39.7	15.26	5.79	90.43	0.1	-39.3	0.21	-64.5	1.1
3.00	0.21	-52.9	15.00	5.62	73.02	0.1	-46.7	0.22	-81.1	1.1
3.50	0.22	-67.7	14.71	5.44	55.58	0.09	-54	0.23	-99	1.2
4.00	0.23	-84.8	14.38	5.23	37.97	0.08	-60.9	0.25	-118	1.3
4.50	0.26	-104	13.95	4.98	20.21	0.08	-67.1	0.28	-138	1.3
5.00	0.28	-124	13.39	4.67	2.574	0.07	-71.6	0.33	-156	1.5
5.50	0.31	-145	12.74	4.33	-14.7	0.06	-73.3	0.38	-172	1.7
6.00	0.34	-164	12.01	3.99	-31.5	0.05	-71.3	0.41	171.9	2.0
6.50	0.37	178	11.22	3.64	-47.9	0.05	-66.3	0.44	156	2.0
7.00	0.39	160.5	10.35	3.29	-64.1	0.05	-60.4	0.47	139.7	2.0
7.50	0.41	143.7	9.42	2.96	-80	0.05	-56.2	0.49	123.3	2.1
8.00	0.42	127.7	8.43	2.64	-95.5	0.06	-55.2	0.51	107.1	1.8
8.50	0.43	112	7.39	2.34	-110	0.06	-57.3	0.54	91.87	1.9
9.00	0.43	95.8	6.30	2.07	-125	0.07	-61.6	0.57	78.02	1.7
9.50	0.44	79.08	5.15	1.81	-138	0.08	-66.9	0.6	65.67	1.6
10.00	0.45	63.22	3.92	1.57	-150	0.08	-72.8	0.62	54.82	1.8
10.50	0.48	50.05	2.65	1.36	-161	0.09	-78.5	0.64	45.31	1.6
11.00	0.51	39.79	1.37	1.17	-171	0.09	-84.1	0.66	36.42	1.7
11.50	0.53	30.99	0.11	1.01	178.6	0.09	-90.1	0.67	27.04	1.9
12.00	0.55	22.04	-1.13	0.88	168.3	0.1	-97.1	0.68	16.47	1.9
12.50	0.57	12.35	-2.34	0.76	157.3	0.1	-105	0.69	4.954	2.0
13.00	0.58	1.748	-3.49	0.67	145.9	0.1	-114	0.7	-6.9	2.2
13.50	0.58	-10.2	-4.59	0.59	134.2	0.1	-124	0.71	-18.6	2.5
14.00	0.59	-23.5	-5.71	0.52	122.7	0.1	-133	0.72	-29.7	2.7
14.50	0.61	-36.9	-6.92	0.45	112.2	0.1	-142	0.74	-39.1	2.9
15.00	0.63	-48.4	-8.23	0.39	103.4	0.1	-150	0.75	-46.1	3.1
16.00	0.69	-62.8	-10.82	0.29	91.06	0.1	-160	0.78	-53.5	3.2
17.00	0.71	-69.7	-13.19	0.22	82.81	0.1	-167	0.79	-59	3.8
18.00	0.72	-74	-15.13	0.18	74.96	0.1	-176	0.78	-68.8	4.8
19.00	0.71	-87.5	-17.05	0.14	60.98	0.1	168.7	0.77	-87.6	6.8
20.00	0.73	-112	-19.79	0.1	42.85	0.09	147.9	0.8	-110	9.0

Notes:

1. S-parameters are measured on a CPWG line fabricated on 0.025 inch thick Rogers® RO4350 material. The input reference plane is at the end of the input lead. The output reference plane is at the end of the output lead.

**AVT-50663 Typical Scattering Parameters**  $T_A = 25^\circ\text{C}$ ,  $Z_0 = 50 \Omega$ ,  $I_d = 45 \text{ mA}$ , (unless specified otherwise)

Id=45mA	S11		S21		S12		S22		K	
	mag	angle	dB	mag	angle	mag	angle	mag		angle
0.05	0	46.76	16.24	6.48	178.2	0.11	-0.72	0.05	-0.52	1.1
0.10	0.01	58.22	16.23	6.48	176.4	0.11	-1.52	0.05	0.833	1.1
0.50	0.03	48.46	16.19	6.45	161.8	0.11	-7.75	0.06	1.615	1.1
0.90	0.07	22.8	16.1	6.38	147.3	0.11	-14.1	0.09	-8.8	1.1
1.50	0.13	-9.99	15.89	6.23	125.7	0.11	-23.5	0.15	-30.6	1.1
2.00	0.16	-23.4	15.69	6.09	108	0.1	-31.2	0.18	-46.3	1.1
2.50	0.18	-36	15.45	5.93	90.57	0.1	-38.8	0.2	-62.3	1.1
3.00	0.2	-49.2	15.19	5.75	73.22	0.1	-46.2	0.21	-79.1	1.1
3.50	0.21	-64.1	14.9	5.56	55.87	0.09	-53.5	0.22	-97.1	1.2
4.00	0.22	-81.4	14.57	5.35	38.36	0.08	-60.4	0.24	-117	1.3
4.50	0.25	-101	14.14	5.1	20.7	0.08	-66.7	0.27	-137	1.3
5.00	0.27	-122	13.6	4.79	3.128	0.07	-71.3	0.32	-155	1.5
5.50	0.3	-142	12.96	4.45	-14.1	0.06	-73.1	0.37	-172	1.7
6.00	0.33	-162	12.25	4.1	-30.8	0.05	-71.4	0.41	172.7	2.0
6.50	0.36	179.9	11.47	3.75	-47.3	0.05	-66.4	0.44	156.7	2.0
7.00	0.38	162	10.62	3.4	-63.6	0.05	-60.2	0.46	140.3	2.0
7.50	0.4	145.1	9.702	3.06	-79.5	0.05	-55.7	0.49	123.7	2.0
8.00	0.42	128.9	8.724	2.73	-95	0.06	-54.6	0.51	107.4	1.7
8.50	0.42	113	7.69	2.42	-110	0.06	-56.6	0.54	92.11	1.9
9.00	0.43	96.69	6.603	2.14	-124	0.07	-60.9	0.57	78.13	1.7
9.50	0.43	79.8	5.45	1.87	-138	0.08	-66.3	0.6	65.67	1.6
10.00	0.45	63.79	4.226	1.63	-150	0.08	-72.2	0.62	54.74	1.7
10.50	0.48	50.49	2.953	1.4	-161	0.09	-78	0.65	45.17	1.5
11.00	0.51	40.13	1.671	1.21	-171	0.09	-83.7	0.66	36.24	1.7
11.50	0.53	31.23	0.408	1.05	178.5	0.1	-89.8	0.67	26.81	1.6
12.00	0.55	22.22	-0.83	0.91	168.1	0.1	-96.9	0.68	16.2	1.8
12.50	0.57	12.47	-2.04	0.79	157.1	0.1	-105	0.69	4.669	2.0
13.00	0.58	1.813	-3.19	0.69	145.6	0.1	-114	0.7	-7.19	2.2
13.50	0.58	-10.1	-4.29	0.61	133.9	0.1	-124	0.71	-19	2.4
14.00	0.59	-23.5	-5.42	0.54	122.3	0.11	-133	0.72	-30	2.4
14.50	0.6	-36.9	-6.63	0.47	111.7	0.1	-142	0.74	-39.4	2.8
15.00	0.63	-48.4	-7.93	0.4	102.9	0.1	-150	0.75	-46.4	3.0
16.00	0.69	-62.9	-10.5	0.3	90.4	0.1	-160	0.78	-53.8	3.1
17.00	0.71	-69.8	-12.9	0.23	81.97	0.1	-167	0.79	-59.3	3.7
18.00	0.72	-74.1	-14.8	0.18	73.92	0.1	-176	0.78	-69.1	4.8
19.00	0.71	-87.7	-16.7	0.15	59.73	0.1	168.5	0.77	-87.9	6.3
20.00	0.73	-112	-19.5	0.11	41.32	0.09	147.8	0.8	-110	8.1

Notes:


1. S-parameters are measured on a CPWG line fabricated on 0.025 inch thick Rogers® RO4350 material. The input reference plane is at the end of the input lead. The output reference plane is at the end of the output lead.

## Part Number Ordering Information

Part Number	No. of Devices	Container
AVT-50663-TR1G	3000	7" Reel
AVT-50663-BLKG	100	Antistatic Bag

## Package Dimensions

### Outline 63 (SOT-363/SC-70)

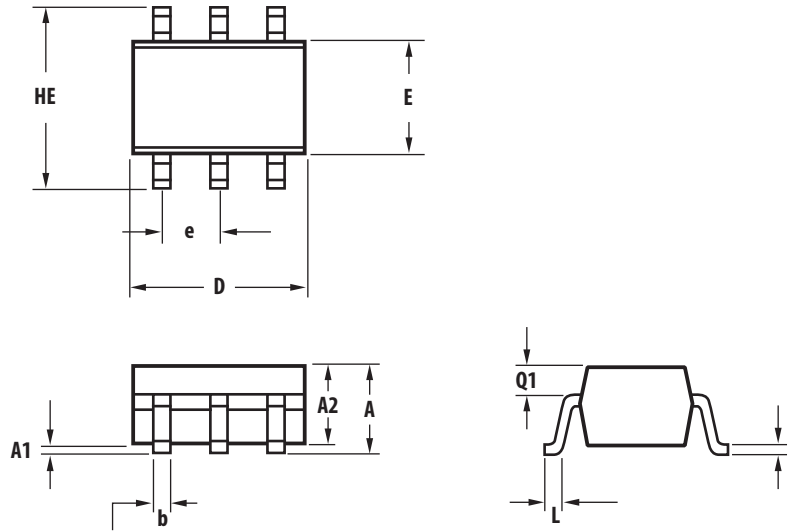


SYMBOL	DIMENSIONS (mm)	
	MIN.	MAX.
E	1.15	1.35
D	1.80	2.25
HE	1.80	2.40
A	0.80	1.10
A2	0.80	1.00
A1	0.00	0.10
Q1	0.10	0.40
e	0.65	
b	0.15	0.30
c	0.10	0.25
L	0.10	0.46

#### Notes:


1. All dimensions are in mm.
2. Dimensions are inclusive of plating.
3. Dimensions are exclusive of mold flash & metal burr.
4. All specifications comply to EIAJSC70.
5. Die is facing up for mold and facing down for trim/form, ie: reverse trim/form.
6. Package surface to be mirror finish. 0.650BCS.

## Recommended PCB Pad Layout for Avago's SC70 6L/SOT-363 Products

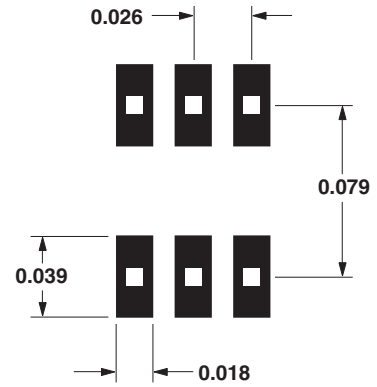


Dimensions in inches.

## Device Orientation


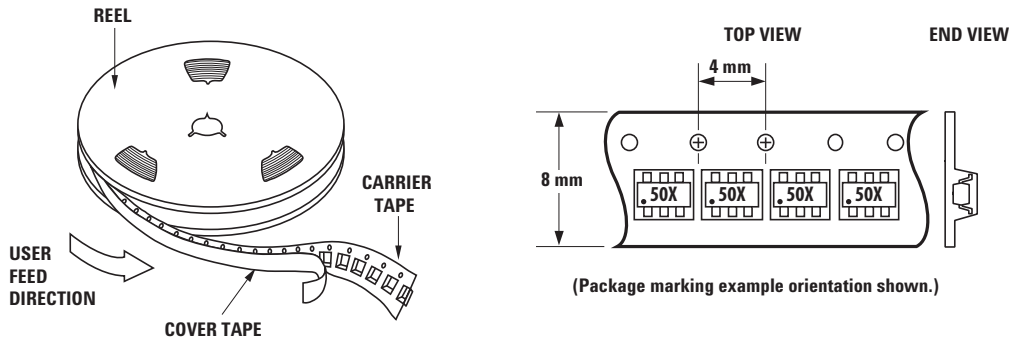


## Tape Dimensions and Product Orientation for Outline 63

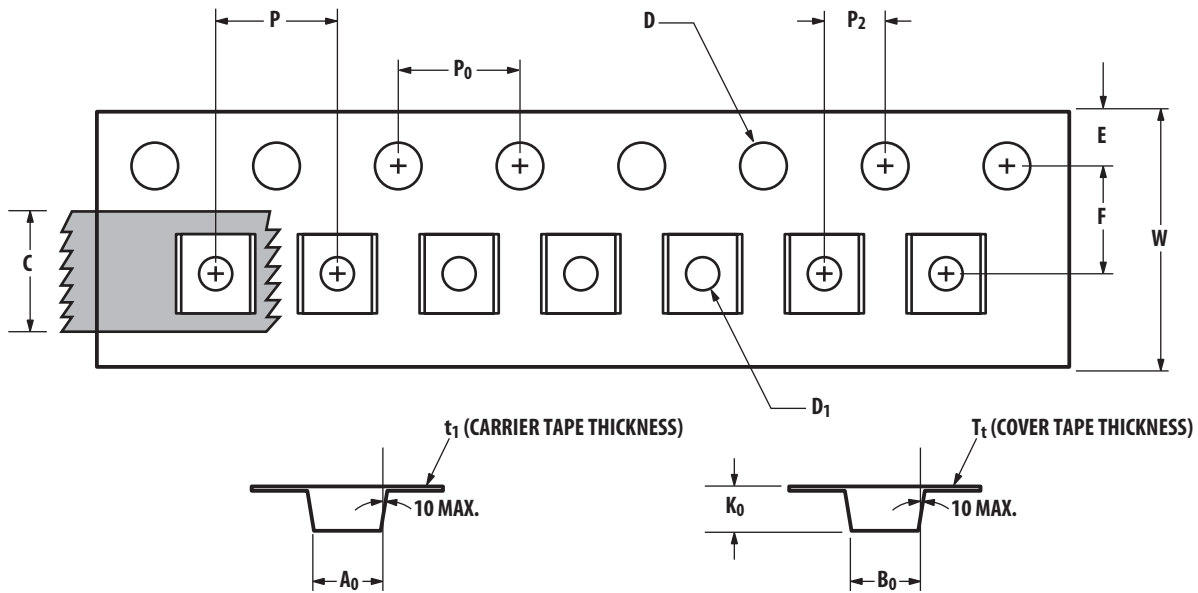


	DESCRIPTION	SYMBOL	SIZE (mm)	SIZE (INCHES)
CAVITY	LENGTH	$A_0$	2.40 0.10	0.094 0.004
	WIDTH	$B_0$	2.40 0.10	0.094 0.004
	DEPTH	$K_0$	1.20 0.10	0.047 0.004
	PITCH	$P$	4.00 0.10	0.157 0.004
	BOTTOM HOLE DIAMETER	$D_1$	1.00 + 0.25	0.039 + 0.010
PERFORATION	DIAMETER	$D$	1.50 0.10	0.061 + 0.002
	PITCH	$P_0$	4.00 0.10	0.157 0.004
	POSITION	$E$	1.75 0.10	0.069 0.004
CARRIER TAPE	WIDTH	$W$	8.00 + 0.30 - 0.10	0.315 + 0.012
	THICKNESS	$t_1$	0.254 0.02	0.0100 0.0008
COVER TAPE	WIDTH	$C$	5.40 0.10	0.205 + 0.004
	TAPE THICKNESS	$T_t$	0.062 0.001	0.0025 0.0004
DISTANCE	CAVITY TO PERFORATION (WIDTH DIRECTION)	$F$	3.50 0.05	0.138 0.002
	CAVITY TO PERFORATION (LENGTH DIRECTION)	$P_2$	2.00 0.05	0.079 0.002

**Reel Dimension 7 inch**

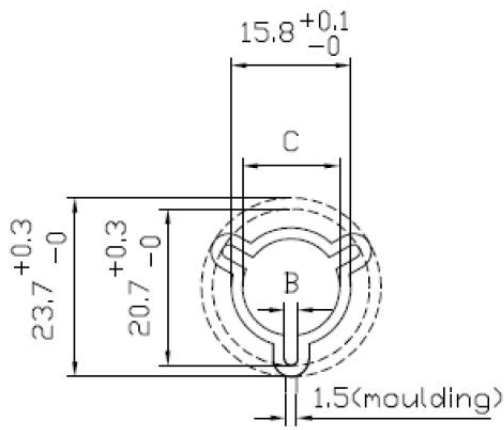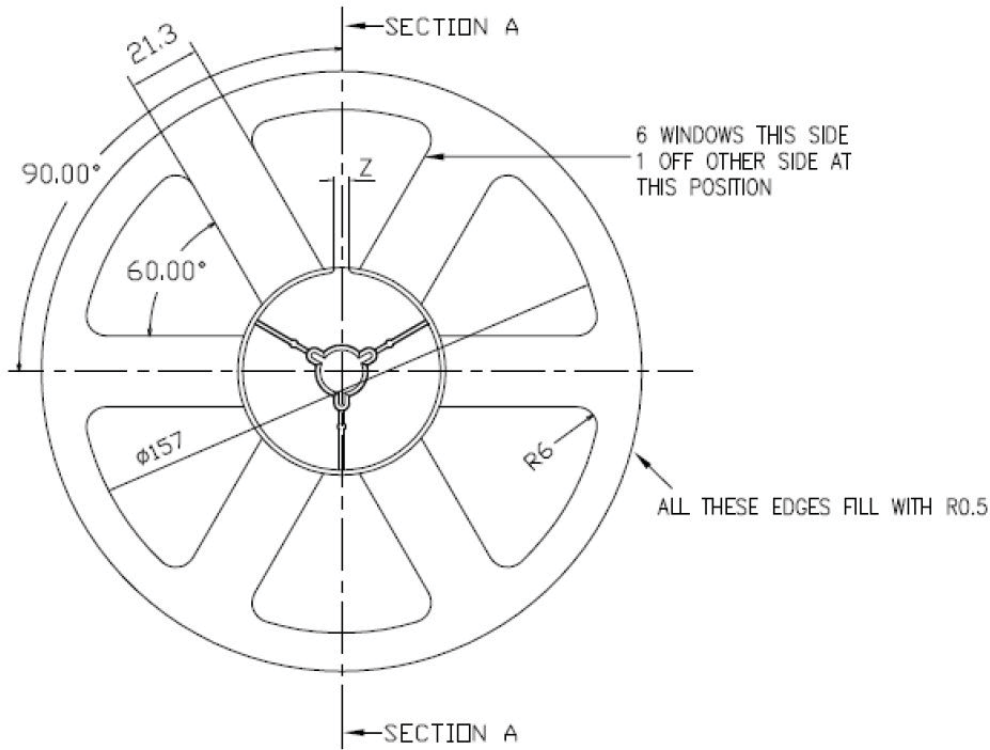

HUB DETAIL

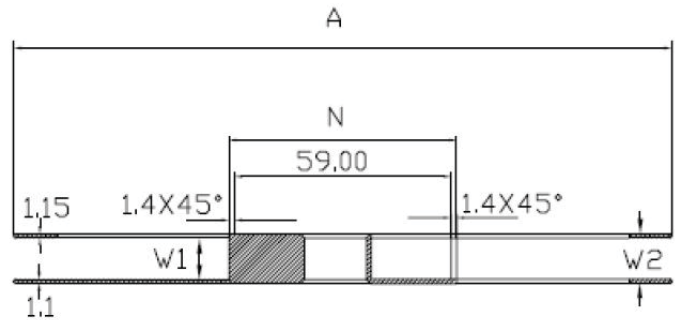

SECTION A

For product information and a complete list of distributors, please go to our web site: [www.avagotech.com](http://www.avagotech.com)

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2009 Avago Technologies. All rights reserved. AV02-2244EN - December 1, 2009

