


**2A SURFACE MOUNT SCHOTTKY BRIDGE**
**FEATURES:**

- Reverse Voltage - 40 to 200 V
- Forward Current - 2 A
- High Surge Current Capability
- Designed for Surface Mount Application

**PINNING**

PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Cathode ( - )


**MBS Package**
**MECHANICAL DATA**

- Case: MBS
- Terminals: Solderable per MIL-STD-750, Method 2026
- Approx. Weight: 100mg / 0.0035oz

**Maximum Ratings and Electrical characteristics**

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	MB24S	MB26S	MB28S	MB210S	MB220S	Units					
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	40	60	80	100	200	V					
Maximum RMS voltage	V <sub>RMS</sub>	28	42	56	70	140	V					
Maximum DC Blocking Voltage	V <sub>DC</sub>	40	60	80	100	200	V					
Maximum Average Forward Rectified Current at T <sub>c</sub> = 90°C	I <sub>F(AV)</sub>	2.0					A					
Peak Forward Surge Current, 8.3ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>	50		40			A					
Max Instantaneous Forward Voltage at 2 A	V <sub>F</sub>	0.55	0.70	0.85			V					
Maximum DC Reverse Current T <sub>a</sub> = 25°C at Rated DC Reverse Voltage T <sub>a</sub> = 100°C	I <sub>R</sub>	0.5 10		0.3 5		mA						
Typical Junction Capacitance <sup>1)</sup>	C <sub>j</sub>	220	80			pF						
Typical Thermal Resistance <sup>2)</sup>	R <sub>θJA</sub>	75					°C/W					
Operating Junction Temperature Range	T <sub>j</sub>	-55 ~ +125					°C					
Storage Temperature Range	T <sub>stg</sub>	-55 ~ +150					°C					

Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with 4×1.5"×1.5" ( 3.81×3.81 cm ) copper pad.

Fig.1 Forward Current Derating Curve

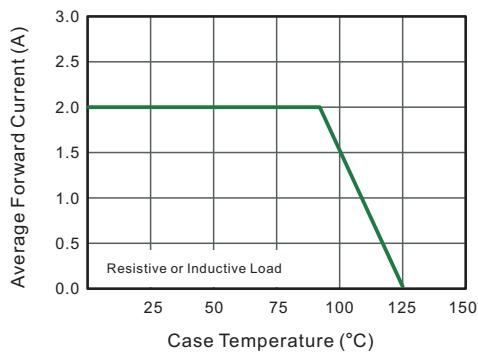


Fig.2 Typical Reverse Characteristics

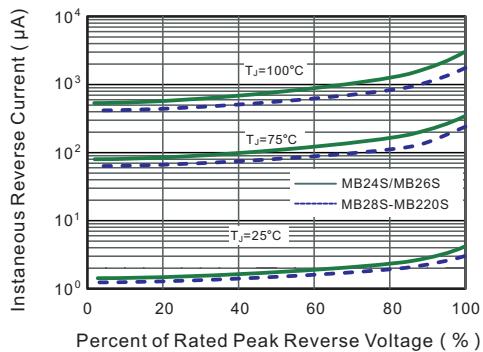


Fig.3 Typical Forward Characteristic

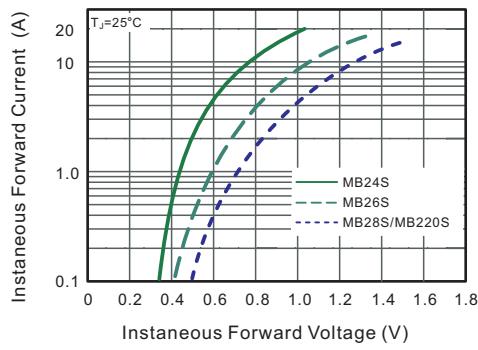


Fig.4 Typical Junction Capacitance

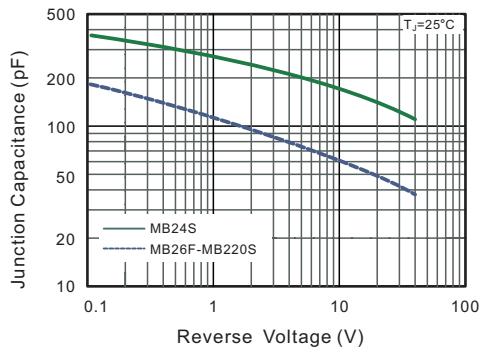


Fig.5 Maximum Non-Repetitive Peak Forward Surge Current


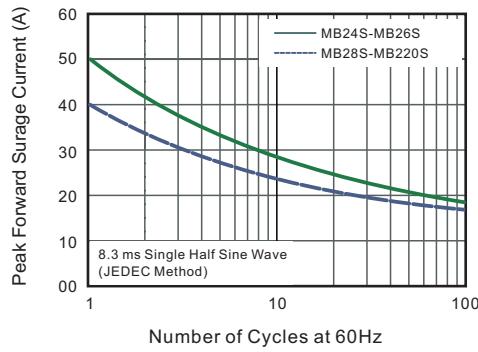



Fig.6- Typical Transient Thermal Impedance

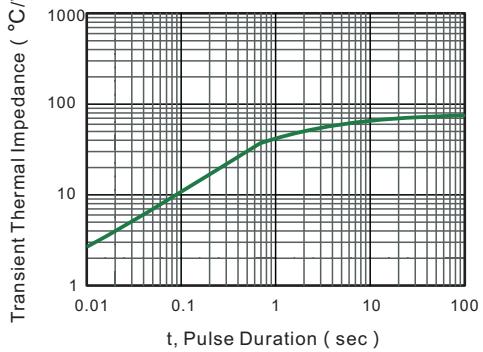


## PACKAGE OUTLINE

Plastic surface mounted package; 4 leads

MBS

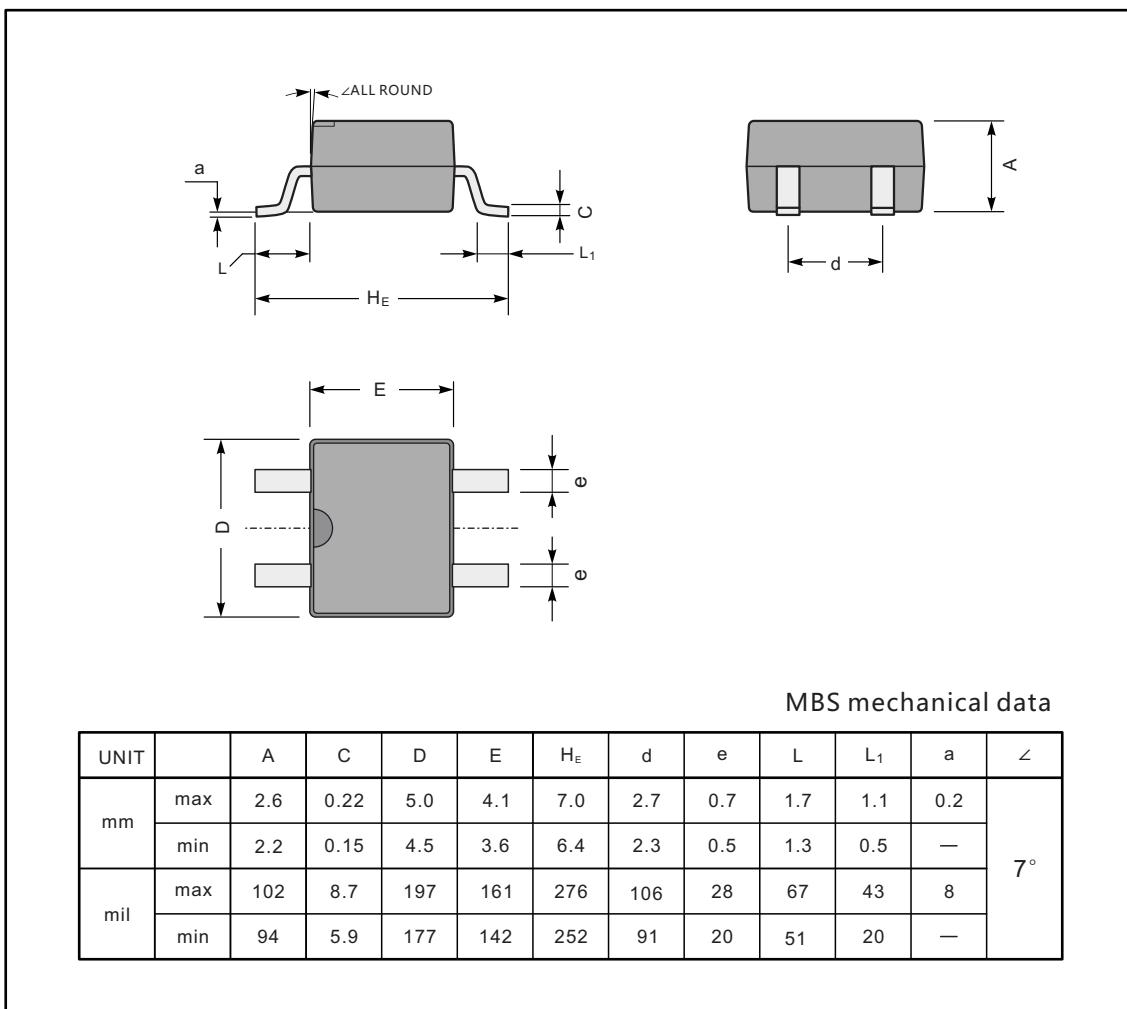

### The recommended mounting pad size

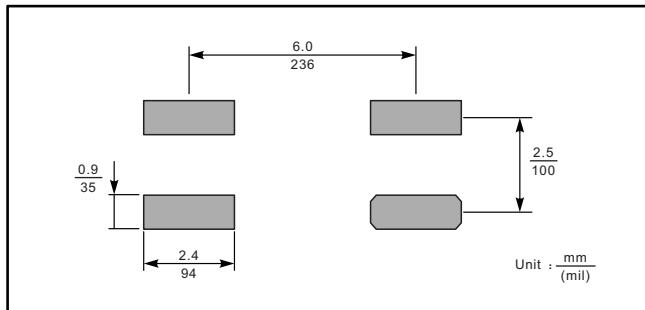

### Marking

Type number	Marking code
MB24S	MB24S
MB26S	MB26S
MB28S	MB28S
MB210S	MB210S
MB220S	MB220S

A small diagram of the package shows the marking code "MBxxS" printed on it.