
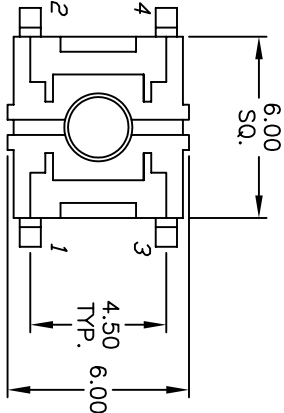





L.E.D INFO: GRN

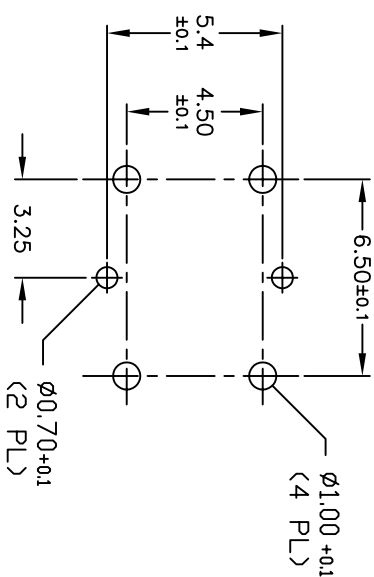

(B)
(C)

PARAMETERS	SYMBOL	MAX.	TYP.	UNITS
POWER DISSIPATION	P _d	70	-	mW
AVE FORWARD CURRENT	I _f	25	-	mA
REVERSE VOLTAGE	V _r	4	-	V
FORWARD VOLTAGE	V _f	2.8	-	V
PEAK EMISSION WAVELENGTH	λ _d	-	557	nm
REVERSE CURRENT	I _r	10	-	μA
LUMINOUS INTENSITY @ 20mA	I _v	-	3	mcd

RECOMMENDED P.C.B. LAYOUT

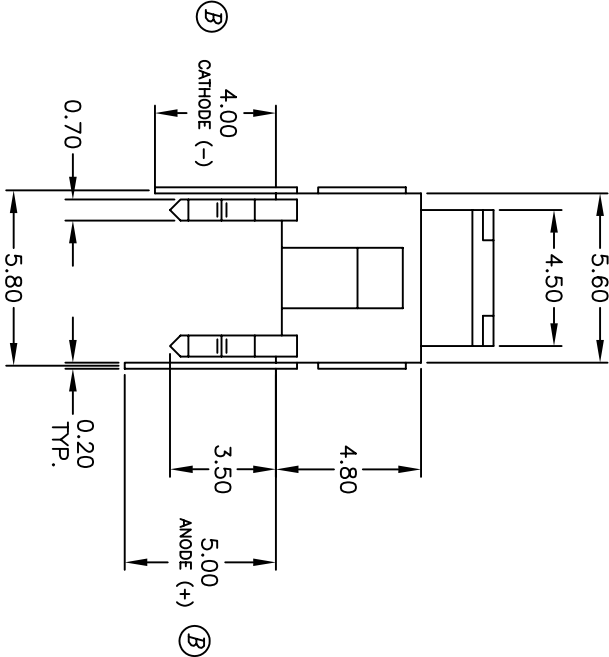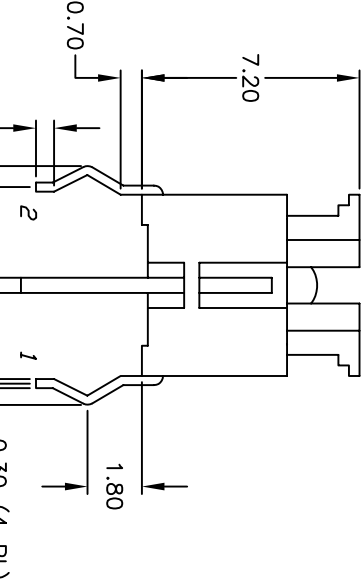

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 50mA, 12VDC
4. TRAVEL: 0.25 +0.2/0.1mm
5. OPERATING FORCE: 160±50gf
6. CONTACT RESISTANCE: 100mILLI-Ohms Max
7. 2002/95/EC (ROHS) COMPLIANT

CONTACT CONFIGURATION

E	15286	DIM TD 5.4 FROM 5.6 ON P.C.B.	9/16/05	PH	E-SWITCH® TITLE TL1240GQ			
D	15281	REV. DESCRIPTION, ROHS NOTE	9/14/05	PH				
C	13388	REVISED SPECS	8/21/03	AR				
B	11324	REVISED SPECS	7/20/01	CJB				
REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG
					4:1	3/22/01	CJB	P010362
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED								REV
								E